



TOWN OF ARLINGTON
REDEVELOPMENT BOARD

Application for Special Permit In Accordance with Environmental Design
Review Procedures (Section 3.4 of the Zoning Bylaw)

Docket No. _____

1. Property Address 882-892 Massachusetts Ave
Name of Record Owner(s) 882-892 Massachusetts Ave, LLC Phone 781-654-6306
Address of Owner 452 Massachusetts Ave, Ste 203, Arlington, MA 02474
Street City, State, Zip
2. Name of Applicant(s) (if different than above) Same as above
Address _____ Phone _____
Status Relative to Property (occupant, purchaser, etc.) _____
3. Location of Property Map 126, Block 1, Lots 6 and 7
Assessor's Block Plan, Block, Lot No.
4. Deed recorded in the Registry of deeds, Book 1523, Page 101;
-or- registered in Land Registration Office, Cert. No. _____, in Book _____, Page _____.
5. Present Use of Property (include # of dwelling units, if any) Retail, Service, Restaurant
6. Proposed Use of Property (include # of dwelling units, if any) Mixed-Use
22 Apartment Units, 1,300 SF Retail
7. Permit applied for in accordance with _____ 3.4 _____ Environmental Design Review
the following Zoning Bylaw section(s) 5.5.2 _____ Dimensional and Density Regulations
SP _____ (Mixed-Use <=20,000SF)
section(s) title(s)
8. Please attach a statement that describes your project and provide any additional information that may aid the ARB in understanding the permits you request. Include any reasons that you feel you should be granted the requested permission.
See Attached

(In the statement below, strike out the words that do not apply)

The applicant states that 882-892 Massachusetts Ave, LLC is the owner -or- occupant -or- purchaser under agreement of the property in Arlington located at 882-892 Massachusetts Ave which is the subject of this application; and that unfavorable action -or- no unfavorable action has been taken by the Zoning Board of Appeals on a similar application regarding this property within the last two years. The applicant expressly agrees to comply with any and all conditions and qualifications imposed upon this permission, either by the Zoning Bylaw or by the Redevelopment Board, should the permit be granted.

Signature of Applicant(s)

Address

Phone



Town of Arlington Redevelopment Board
Application for Special Permit in accordance with
Environmental Design Review (Section 3.4)

Required Submittals Checklist

Two full sets of materials and one electronic copy are required. A model may be requested. Review the ARB's Rules and Regulations, which can be found at arlingtonma.gov/arb, for the full list of required submittals.

- X Dimensional and Parking Information Form (see attached)
- X Site plan of proposal
- N/A Model, if required
- X Drawing of existing conditions
- X Drawing of proposed structure
- X Proposed landscaping. May be incorporated into site plan
- X Photographs
- X Impact statement
- N/A Application and plans for sign permits
- X Stormwater management plan (for stormwater management during construction for projects with new construction)

FOR OFFICE USE ONLY

_____	Special Permit Granted	Date: _____
_____	Received evidence of filing with Registry of Deeds	Date: _____
_____	Notified Building Inspector of Special Permit filing	Date: _____

TOWN OF ARLINGTON REDEVELOPMENT BOARD

Petition for Special Permit under Environmental Design Review (see Section 3.4 of the Arlington Zoning Bylaw for Applicability)

For projects subject to Environmental Design Review, (see Section 3.4), please submit a statement that completely describes your proposal, and addresses each of the following standards.

1. **Preservation of Landscape.** The landscape shall be preserved in its natural state, insofar as practicable, by minimizing tree and soil removal, and any grade changes shall be in keeping with the general appearance of neighboring developed areas.
2. **Relation of Buildings to Environment.** Proposed development shall be related harmoniously to the terrain and to the use, scale, and architecture of existing buildings in the vicinity that have functional or visual relationship to the proposed buildings. The Arlington Redevelopment Board may require a modification in massing to reduce the effect of shadows on abutting property in an R0, R1 or R2 district or on public open space.
3. **Open Space.** All open space (landscaped and usable) shall be so designed as to add to the visual amenities of the vicinity by maximizing its visibility for persons passing the site or overlooking it from nearby properties. The location and configuration of usable open space shall be so designed as to encourage social interaction, maximize its utility, and facilitate maintenance.
4. **Circulation.** With respect to vehicular, pedestrian and bicycle circulation, including entrances, ramps, walkways, drives, and parking, special attention shall be given to location and number of access points to the public streets (especially in relation to existing traffic controls and mass transit facilities), width of interior drives and access points, general interior circulation, separation of pedestrian and vehicular traffic, access to community facilities, and arrangement of vehicle parking and bicycle parking areas, including bicycle parking spaces required by Section 8.13 that are safe and convenient and, insofar as practicable, do not detract from the use and enjoyment of proposed buildings and structures and the neighboring properties.
5. **Surface Water Drainage.** Special attention shall be given to proper site surface drainage so that removal of surface waters will not adversely affect neighboring properties or the public storm drainage system. Available Best Management Practices for the site should be employed, and include site planning to minimize impervious surface and reduce clearing and re-grading. Best Management Practices may include erosion control and storm water treatment by means of swales, filters, plantings, roof gardens, native vegetation, and leaching catch basins. Storm water should be treated at least minimally on the development site; that which cannot be handled on site shall be removed from all roofs, canopies, paved and pooling areas and carried away in an underground drainage system. Surface water in all paved areas shall be collected at intervals so that it will not obstruct the flow of vehicular or pedestrian traffic, and will not create puddles in the paved areas.

In accordance with Section 3.3.4, the Board may require from any applicant, after consultation with the Director of Public Works, security satisfactory to the Board to insure the maintenance of all storm water facilities such as catch basins, leaching catch basins, detention basins, swales, etc. within the site. The Board may use funds provided by such security to conduct maintenance that the applicant fails to do. The Board may adjust in its sole discretion the amount and type of financial security such that it is satisfied that the amount is sufficient to provide for the future maintenance needs.

6. **Utility Service.** Electric, telephone, cable TV and other such lines and equipment shall be underground. The proposed method of sanitary sewage disposal and solid waste disposal from all buildings shall be indicated.
7. **Advertising Features.** The size, location, design, color, texture, lighting and materials of all permanent signs and outdoor advertising structures or features shall not detract from the use and enjoyment of proposed buildings and structures and the surrounding properties. Advertising features are subject to the provisions of Section 6.2 of the Zoning Bylaw.

8. **Special Features.** Exposed storage areas, exposed machinery installations, service areas, truck loading areas, utility buildings and structures, and similar accessory areas and structures shall be subject to such setbacks, screen plantings or other screening methods as shall reasonably be required to prevent their being incongruous with the existing or contemplated environment and the surrounding properties.
9. **Safety.** With respect to personal safety, all open and enclosed spaces shall be designed to facilitate building evacuation and maximize accessibility by fire, police, and other emergency personnel and equipment. Insofar as practicable, all exterior spaces and interior public and semi-public spaces shall be so designed as to minimize the fear and probability of personal harm or injury by increasing the potential surveillance by neighboring residents and passersby of any accident or attempted criminal act.
10. **Heritage.** With respect to Arlington's heritage, removal or disruption of historic, traditional or significant uses, structures, or architectural elements shall be minimized insofar as practicable, whether these exist on the site or on adjacent properties.
11. **Microclimate.** With respect to the localized climatic characteristics of a given area, any development which proposes new structures, new hard-surface ground coverage, or the installation of machinery which emits heat, vapor, or fumes, shall endeavor to minimize, insofar as practicable, any adverse impact on light, air, and water resources, or on noise and temperature levels of the immediate environment.
12. **Sustainable Building and Site Design.** Projects are encouraged to incorporate best practices related to sustainable sites, water efficiency, energy and atmosphere, materials and resources, and indoor environmental quality. Applicants must submit a current Green Building Council Leadership in Energy and Environmental Design (LEED) checklist, appropriate to the type of development, annotated with narrative description that indicates how the LEED performance objectives will be incorporated into the project. [LEED checklists can be found at <http://www.usgbc.org/DisplayPage.aspx?CMSPageID=220b>]

In addition, projects subject to Environmental Design Review must address and meet the following Special Permit Criteria (see Section 3.3.3 of the Zoning Bylaw):

1. The use requested is listed as a special permit in the use regulations for the applicable district or is so designated elsewhere in this Bylaw.
2. The requested use is essential or desirable to the public convenience or welfare.
3. The requested use will not create undue traffic congestion or unduly impair pedestrian safety.
4. The requested use will not overload any public water, drainage or sewer system or any other municipal system to such an extent that the requested use or any developed use in the immediate area or in any other area of the Town will be unduly subjected to hazards affecting health, safety or the general welfare.
5. Any special regulations for the use as may be provided in this Bylaw are fulfilled.
6. The requested use will not impair the integrity or character of the district or adjoining districts, nor be detrimental to the health, morals, or welfare.
7. The requested use will not, by its addition to a neighborhood, cause an excess of the particular use that could be detrimental to the character of said neighborhood.

TOWN OF ARLINGTON

Dimensional and Parking Information
for Application to
The Arlington Redevelopment Board

Docket No. _____

Property Location 882-892 Massachusetts Ave

Zoning District B2

Owner: 882-892 Massachusetts Ave, LLC

Address: 452 Massachusetts Ave, Arlington, MA

Present Use/Occupancy: No. of Dwelling Units:

Retail, Service, Restaurant

Uses and their gross square feet:

1-Story 5,016 SF

Proposed Use/Occupancy: No. of Dwelling Units:

Mixed-Use, 22 Apartment Units & 1,300 SF Retail

Uses and their gross square feet:

4-Story Mixed-Use 17,720 GSF

	Present Conditions	Proposed Conditions	Min. or Max. Required by Zoning for Proposed Use
Lot Size	14,381 SF	14,381 SF	min. ----
Frontage	208 FT	208 FT	min. ----
Floor Area Ratio	0.35	1.23	max. 1.5
Lot Coverage (%), where applicable	34.9%	30.8%	max. ----
Lot Area per Dwelling Unit (square feet)	N/A	654 SF	min. ----
Front Yard Depth (feet)	0 FT	2.7 FT	min. ----
Side Yard Width (feet) right side	--	--	min. ----
left side	1.3 FT	3.4 FT	min. ----
Rear Yard Depth (feet)	53.6 FT	63.0 FT	min. 20.3 FT
Height	----	-----	min. -----
Stories	1-STORY	4-STORY	stories 4-STORY
Feet	13.5 FT	46 FT	feet 50 FT
Open Space (% of G.F.A.)	-----	-----	min. -----
Landscaped (square feet)	760 SF	2,083 SF(20.1%)	(s.f.) 1,438 SF (10%)
Usable (square feet)	0 SF	60 SF(0.4%)	(s.f.) 2,876 SF (20%)
Parking Spaces (No.)	UNKNOWN	25 SPACES	min. 25 SPACES
Parking Area Setbacks (feet), where applicable	0 FT	5 FT	min. 5 FT
Loading Spaces (No.)	N/A	N/A	min. N/A
Type of Construction	NEW CONSTRUCTION		
Distance to Nearest Building	12.1 FT	18.6 FT	min.

Includes landscaped
space & walks per
definition.

Includes Bike
Storage Pad per

June 23, 2020

Jennifer Raitt
Director of Planning & Community
Development
730 Massachusetts Ave
Arlington, MA 02476

RE: Mixed-Use Redevelopment
Drainage Summary Letter
882-892 Massachusetts Ave
Arlington, MA 02476

Dear Ms. Raitt,

On behalf of our Client, 882-892 Massachusetts Ave, LLC, Allen & Major Associates (A&M) is pleased to provide this letter in support of the Special Permit application for the Mixed-Use Redevelopment project at 882-892 Massachusetts Ave. This letter will summarize the changes to the stormwater management system which are proposed as part of the redevelopment efforts.

Existing Conditions

The site is located on the corner of Lockeland Avenue and Massachusetts Avenue with access to the parking area from Lockeland Avenue. It is comprised of two property's, identified on the City tax Map 126, Block 1, Lots 6 and 7. Lot 6 is predominantly covered by an existing 1-story brick building, approximately 4,786 square feet. Lot 7 is predominantly covered by paved parking area. Elevations onsite range from elevation 79 to elevation 80. Elevation 79 is the low point on-site located at the existing catch basin, and elevation 80 runs along the southern property line. Stormwater sheet flows from the paved parking lot to onsite to the existing catch basin which discharges to the existing municipal system via an 8" cast iron pipe. The majority of the stormwater from the site discharges through this connection including the roof drainage and parking lot. A review of the NRCS soil report for Middlesex County indicates that the soil onsite is considered Merrimac-Urban Land which has a Hydrologic Soil Group rating of an "A". A copy of the Existing Watershed Plan is included herewith.

Proposed Conditions

The project, proposes to demolish the existing structure to construct a 4-story, 4,400 square foot Mixed-Use building with apartment and retail uses. There are 22 apartment units proposed and a 1,300 square foot retail component. The parking area is proposed to be reconstructed within the constraints of the existing pavement area. The stormwater management system will be improved with the installation of a new catch basin with a sump and hood at the outlet pipe to provide stormwater treatment. The quantity of stormwater runoff will be reduced with the installation of landscaped areas on-site. The proposed work will result in approximately 2,083 square feet of impervious material being replaced with landscaped areas.

Runoff flows were estimated for both pre and post development conditions using HydroCAD 10.00 software, at two specific "Study Points" (SP-1 & SP-2). Study Point 1 is the flows that will enter the on-site catch basin and discharge to the municipal drainage system. Study Point 2 is the stormwater flows that will flow onto Massachusetts Ave, and be collected within the street catch basins. The table below shows that the project causes a reduction in the peak rate of runoff and volume of stormwater leaving the site at both Study Points. Copies of the HydroCAD worksheets and Watershed Plans are included herewith.

STUDY POINT #1 (flow to on-site catch basin)			
	2-Year	10-Year	100-Year
Existing Flow (CFS)	1.02	1.55	2.83
Proposed Flow (CFS)	0.82	1.37	2.69
Decrease (CFS)	0.20	0.18	0.14
Existing Volume (CF)	3,400	5,267	9,812
Proposed Volume (CF)	2,476	4,239	8,661
Decrease (CF)	924	1,028	1,151

STUDY POINT #2 (flow to Mass Ave)			
	2-Year	10-Year	100-Year
Existing Flow (CFS)	0.06	0.09	0.16
Proposed Flow (CFS)	0.03	0.06	0.14
Decrease (CFS)	0.03	0.03	0.02
Existing Volume (CF)	192	297	554
Proposed Volume (CF)	88	180	434
Decrease (CF)	104	117	120

The surface water drainage requirements of the Town of Arlington Zoning Bylaw Environmental Design Review Standards have been reviewed and met with the proposed design. The proposed project will introduce landscaped areas to the site to reduce the impervious area, and a new catch basin is proposed with a sump and hood at the outlet pipe to provide stormwater treatment. The Town of Arlington, Article 15 Stormwater Mitigation, shall not apply as the proposed development will introduce a reduction in impervious area. However, with the proposed landscaped areas the project will reduce the runoff rates for all design storms, and comply with this bylaw.

Summary

As shown in the table above, the proposed development will have a positive impact on the stormwater management system by reducing the rate and volume of stormwater runoff from the site.

Very truly yours,

ALLEN & MAJOR ASSOCIATES, INC.



Aaron Mackey, PE
Project Engineer



Attachments:

1. Existing Watershed Plan
2. Proposed Watershed Plan
3. Pre development HydroCAD Calculations
4. Post development HydroCAD Calculations
5. Extreme Precipitation Tables
6. NRCS Soil Report

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_WATERSHED-EXISTING.DWG

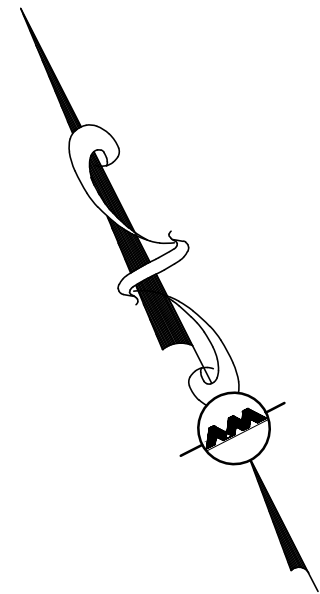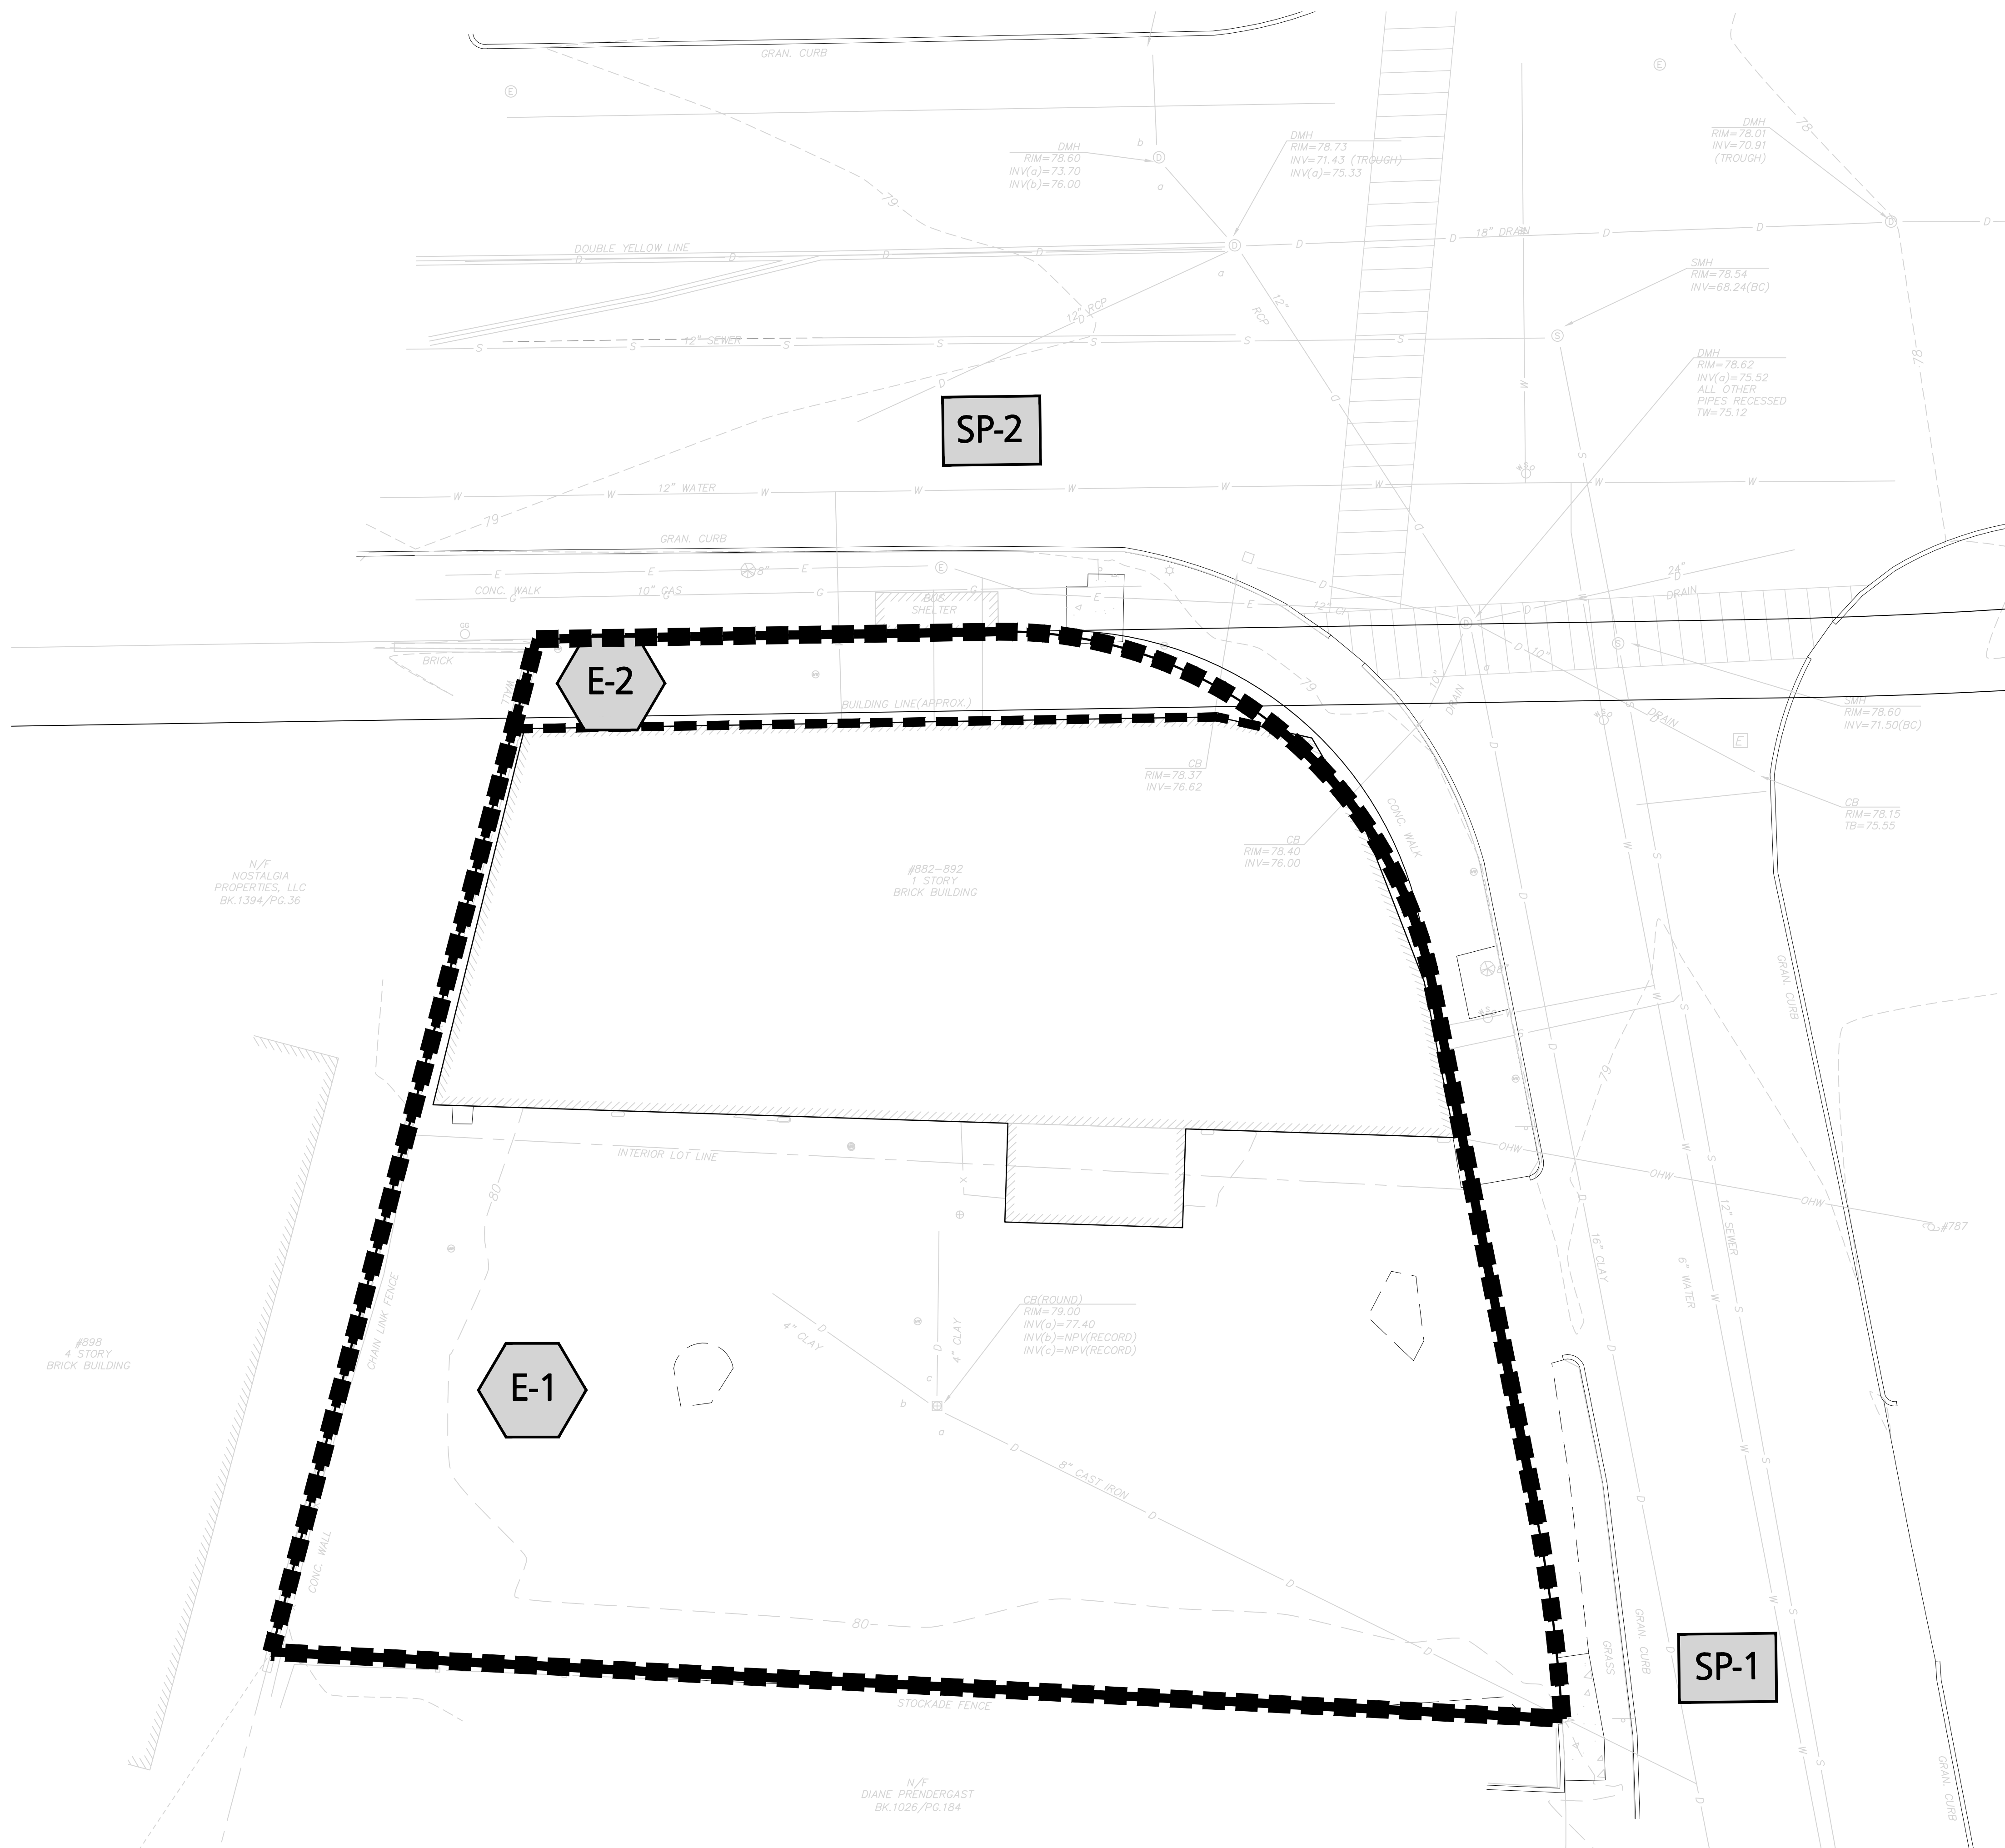

LEGEND

EXISTING WATERSHED	
SUBCATCHMENT BOUNDARY	
SUBCATCHMENT LABEL	

2	06/17/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C2729-01
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:


ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896


WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
EXISTING WATERSHED PLAN	EWP

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

GRAPHIC SCALE



R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_WATERSHED-PROPOSED.DWG



2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C2729-01
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:


ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH


THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
PROPOSED WATERSHED PLAN	PWP


Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved




Subcat E-2





Study Point 2



Subcat E-1



Study Point 1



2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 4/10/2020

Page 2

Area Listing (all nodes)

Area (sq-ft)	CN	Description (subcatchment-numbers)
9,372	98	Paved parking, HSG A (E-1, E-2)
5,008	98	Roofs, HSG A (E-1)
14,381	98	TOTAL AREA

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 4/10/2020

Page 3

Soil Listing (all nodes)

Area (sq-ft)	Soil Group	Subcatchment Numbers
14,381	HSG A	E-1, E-2
0	HSG B	
0	HSG C	
0	HSG D	
0	Other	
14,381		TOTAL AREA

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 4/10/2020

Page 4

Ground Covers (all nodes)

HSG-A (sq-ft)	HSG-B (sq-ft)	HSG-C (sq-ft)	HSG-D (sq-ft)	Other (sq-ft)	Total (sq-ft)	Ground Cover	Subcatchment Numbers
9,372	0	0	0	0	9,372	Paved parking	E-1, E-2
5,008	0	0	0	0	5,008	Roofs	E-1
14,381	0	0	0	0	14,381	TOTAL AREA	

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 2-Year Rainfall=3.23"

Printed 4/10/2020

Page 5

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment E-1: Subcat E-1

Runoff Area=13,613 sf 100.00% Impervious Runoff Depth=3.00"
Tc=5.0 min CN=98 Runoff=1.02 cfs 3,400 cf

Subcatchment E-2: Subcat E-2

Runoff Area=768 sf 100.00% Impervious Runoff Depth=3.00"
Tc=5.0 min CN=98 Runoff=0.06 cfs 192 cf

Reach SP1: Study Point 1

Inflow=1.02 cfs 3,400 cf
Outflow=1.02 cfs 3,400 cf

Reach SP2: Study Point 2

Inflow=0.06 cfs 192 cf
Outflow=0.06 cfs 192 cf

Total Runoff Area = 14,381 sf Runoff Volume = 3,592 cf Average Runoff Depth = 3.00"
0.00% Pervious = 0 sf 100.00% Impervious = 14,381 sf

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.
 HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 2-Year Rainfall=3.23"

Printed 4/10/2020

Page 6

Summary for Subcatchment E-1: Subcat E-1

Runoff = 1.02 cfs @ 12.07 hrs, Volume= 3,400 cf, Depth= 3.00"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.23"

Area (sf)	CN	Description
8,604	98	Paved parking, HSG A
5,008	98	Roofs, HSG A
13,613	98	Weighted Average
13,613		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment E-2: Subcat E-2

Runoff = 0.06 cfs @ 12.07 hrs, Volume= 192 cf, Depth= 3.00"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.23"

Area (sf)	CN	Description
768	98	Paved parking, HSG A
768		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,613 sf, 100.00% Impervious, Inflow Depth = 3.00" for 2-Year event
 Inflow = 1.02 cfs @ 12.07 hrs, Volume= 3,400 cf
 Outflow = 1.02 cfs @ 12.07 hrs, Volume= 3,400 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Summary for Reach SP2: Study Point 2

Inflow Area = 768 sf, 100.00% Impervious, Inflow Depth = 3.00" for 2-Year event
 Inflow = 0.06 cfs @ 12.07 hrs, Volume= 192 cf
 Outflow = 0.06 cfs @ 12.07 hrs, Volume= 192 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 10-Year Rainfall=4.88"

Printed 4/10/2020

Page 7

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment E-1: Subcat E-1

Runoff Area=13,613 sf 100.00% Impervious Runoff Depth=4.64"
Tc=5.0 min CN=98 Runoff=1.55 cfs 5,267 cf

Subcatchment E-2: Subcat E-2

Runoff Area=768 sf 100.00% Impervious Runoff Depth=4.64"
Tc=5.0 min CN=98 Runoff=0.09 cfs 297 cf

Reach SP1: Study Point 1

Inflow=1.55 cfs 5,267 cf
Outflow=1.55 cfs 5,267 cf

Reach SP2: Study Point 2

Inflow=0.09 cfs 297 cf
Outflow=0.09 cfs 297 cf

Total Runoff Area = 14,381 sf Runoff Volume = 5,565 cf Average Runoff Depth = 4.64"
0.00% Pervious = 0 sf 100.00% Impervious = 14,381 sf

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 10-Year Rainfall=4.88"

Printed 4/10/2020

Page 8

Summary for Subcatchment E-1: Subcat E-1

Runoff = 1.55 cfs @ 12.07 hrs, Volume= 5,267 cf, Depth= 4.64"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 10-Year Rainfall=4.88"

Area (sf)	CN	Description
8,604	98	Paved parking, HSG A
5,008	98	Roofs, HSG A
13,613	98	Weighted Average
13,613		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment E-2: Subcat E-2

Runoff = 0.09 cfs @ 12.07 hrs, Volume= 297 cf, Depth= 4.64"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 10-Year Rainfall=4.88"

Area (sf)	CN	Description
768	98	Paved parking, HSG A
768		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,613 sf, 100.00% Impervious, Inflow Depth = 4.64" for 10-Year event
 Inflow = 1.55 cfs @ 12.07 hrs, Volume= 5,267 cf
 Outflow = 1.55 cfs @ 12.07 hrs, Volume= 5,267 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Summary for Reach SP2: Study Point 2

Inflow Area = 768 sf, 100.00% Impervious, Inflow Depth = 4.64" for 10-Year event
 Inflow = 0.09 cfs @ 12.07 hrs, Volume= 297 cf
 Outflow = 0.09 cfs @ 12.07 hrs, Volume= 297 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 100-Year Rainfall=8.89"

Printed 4/10/2020

Page 9

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment E-1: Subcat E-1Runoff Area=13,613 sf 100.00% Impervious Runoff Depth=8.65"
Tc=5.0 min CN=98 Runoff=2.83 cfs 9,812 cf**Subcatchment E-2: Subcat E-2**Runoff Area=768 sf 100.00% Impervious Runoff Depth=8.65"
Tc=5.0 min CN=98 Runoff=0.16 cfs 554 cf**Reach SP1: Study Point 1**Inflow=2.83 cfs 9,812 cf
Outflow=2.83 cfs 9,812 cf**Reach SP2: Study Point 2**Inflow=0.16 cfs 554 cf
Outflow=0.16 cfs 554 cf**Total Runoff Area = 14,381 sf Runoff Volume = 10,366 cf Average Runoff Depth = 8.65"**
0.00% Pervious = 0 sf 100.00% Impervious = 14,381 sf

2729-01_Existing-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 100-Year Rainfall=8.89"

Printed 4/10/2020

Page 10

Summary for Subcatchment E-1: Subcat E-1

Runoff = 2.83 cfs @ 12.07 hrs, Volume= 9,812 cf, Depth= 8.65"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 100-Year Rainfall=8.89"

Area (sf)	CN	Description
8,604	98	Paved parking, HSG A
5,008	98	Roofs, HSG A
13,613	98	Weighted Average
13,613		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment E-2: Subcat E-2

Runoff = 0.16 cfs @ 12.07 hrs, Volume= 554 cf, Depth= 8.65"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 100-Year Rainfall=8.89"

Area (sf)	CN	Description
768	98	Paved parking, HSG A
768		100.00% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,613 sf, 100.00% Impervious, Inflow Depth = 8.65" for 100-Year event

Inflow = 2.83 cfs @ 12.07 hrs, Volume= 9,812 cf

Outflow = 2.83 cfs @ 12.07 hrs, Volume= 9,812 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3


Summary for Reach SP2: Study Point 2

Inflow Area = 768 sf, 100.00% Impervious, Inflow Depth = 8.65" for 100-Year event


Inflow = 0.16 cfs @ 12.07 hrs, Volume= 554 cf

Outflow = 0.16 cfs @ 12.07 hrs, Volume= 554 cf, Atten= 0%, Lag= 0.0 min


Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3



Subcat P-2





Study Point 2



Subcat P-1



Study Point 1



2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 6/24/2020

Page 2

Area Listing (all nodes)

Area (sq-ft)	CN	Description (subcatchment-numbers)
2,080	39	>75% Grass cover, Good, HSG A (P-1, P-2)
7,871	98	Paved parking, HSG A (P-1, P-2)
4,430	98	Roofs, HSG A (P-1)
14,381	89	TOTAL AREA

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 6/24/2020

Page 3

Soil Listing (all nodes)

Area (sq-ft)	Soil Group	Subcatchment Numbers
14,381	HSG A	P-1, P-2
0	HSG B	
0	HSG C	
0	HSG D	
0	Other	
14,381		TOTAL AREA

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Printed 6/24/2020

Page 4

Ground Covers (all nodes)

HSG-A (sq-ft)	HSG-B (sq-ft)	HSG-C (sq-ft)	HSG-D (sq-ft)	Other (sq-ft)	Total (sq-ft)	Ground Cover	Subcatchment Numbers
2,080	0	0	0	0	2,080	>75% Grass cover, Good	P-1, P-2
7,871	0	0	0	0	7,871	Paved parking	P-1, P-2
4,430	0	0	0	0	4,430	Roofs	P-1
14,381	0	0	0	0	14,381	TOTAL AREA	

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 2-Year Rainfall=3.23"

Printed 6/24/2020

Page 5

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment P-1: Subcat P-1

Runoff Area=13,527 sf 86.87% Impervious Runoff Depth=2.20"
Tc=5.0 min CN=90 Runoff=0.82 cfs 2,476 cf

Subcatchment P-2: Subcat P-2

Runoff Area=854 sf 64.40% Impervious Runoff Depth=1.23"
Tc=5.0 min CN=77 Runoff=0.03 cfs 88 cf

Reach SP1: Study Point 1

Inflow=0.82 cfs 2,476 cf
Outflow=0.82 cfs 2,476 cf

Reach SP2: Study Point 2

Inflow=0.03 cfs 88 cf
Outflow=0.03 cfs 88 cf

Total Runoff Area = 14,381 sf Runoff Volume = 2,564 cf Average Runoff Depth = 2.14"
14.47% Pervious = 2,080 sf 85.53% Impervious = 12,301 sf

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.
 HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 2-Year Rainfall=3.23"

Printed 6/24/2020

Page 6

Summary for Subcatchment P-1: Subcat P-1

Runoff = 0.82 cfs @ 12.07 hrs, Volume= 2,476 cf, Depth= 2.20"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.23"

Area (sf)	CN	Description
4,430	98	Roofs, HSG A
1,776	39	>75% Grass cover, Good, HSG A
7,321	98	Paved parking, HSG A
13,527	90	Weighted Average
1,776		13.13% Pervious Area
11,751		86.87% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment P-2: Subcat P-2

Runoff = 0.03 cfs @ 12.08 hrs, Volume= 88 cf, Depth= 1.23"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.23"

Area (sf)	CN	Description
304	39	>75% Grass cover, Good, HSG A
550	98	Paved parking, HSG A
854	77	Weighted Average
304		35.60% Pervious Area
550		64.40% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,527 sf, 86.87% Impervious, Inflow Depth = 2.20" for 2-Year event
 Inflow = 0.82 cfs @ 12.07 hrs, Volume= 2,476 cf
 Outflow = 0.82 cfs @ 12.07 hrs, Volume= 2,476 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Summary for Reach SP2: Study Point 2

Inflow Area = 854 sf, 64.40% Impervious, Inflow Depth = 1.23" for 2-Year event
 Inflow = 0.03 cfs @ 12.08 hrs, Volume= 88 cf
 Outflow = 0.03 cfs @ 12.08 hrs, Volume= 88 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 10-Year Rainfall=4.88"

Printed 6/24/2020

Page 7

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment P-1: Subcat P-1

Runoff Area=13,527 sf 86.87% Impervious Runoff Depth=3.76"

Tc=5.0 min CN=90 Runoff=1.37 cfs 4,239 cf

Subcatchment P-2: Subcat P-2

Runoff Area=854 sf 64.40% Impervious Runoff Depth=2.52"

Tc=5.0 min CN=77 Runoff=0.06 cfs 180 cf

Reach SP1: Study Point 1

Inflow=1.37 cfs 4,239 cf

Outflow=1.37 cfs 4,239 cf

Reach SP2: Study Point 2

Inflow=0.06 cfs 180 cf

Outflow=0.06 cfs 180 cf

Total Runoff Area = 14,381 sf Runoff Volume = 4,419 cf Average Runoff Depth = 3.69"

14.47% Pervious = 2,080 sf 85.53% Impervious = 12,301 sf

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 10-Year Rainfall=4.88"

Printed 6/24/2020

Page 8

Summary for Subcatchment P-1: Subcat P-1

Runoff = 1.37 cfs @ 12.07 hrs, Volume= 4,239 cf, Depth= 3.76"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 10-Year Rainfall=4.88"

Area (sf)	CN	Description
4,430	98	Roofs, HSG A
1,776	39	>75% Grass cover, Good, HSG A
7,321	98	Paved parking, HSG A
13,527	90	Weighted Average
1,776		13.13% Pervious Area
11,751		86.87% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment P-2: Subcat P-2

Runoff = 0.06 cfs @ 12.08 hrs, Volume= 180 cf, Depth= 2.52"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs
Type III 24-hr 10-Year Rainfall=4.88"

Area (sf)	CN	Description
304	39	>75% Grass cover, Good, HSG A
550	98	Paved parking, HSG A
854	77	Weighted Average
304		35.60% Pervious Area
550		64.40% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,527 sf, 86.87% Impervious, Inflow Depth = 3.76" for 10-Year event
 Inflow = 1.37 cfs @ 12.07 hrs, Volume= 4,239 cf
 Outflow = 1.37 cfs @ 12.07 hrs, Volume= 4,239 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Summary for Reach SP2: Study Point 2

Inflow Area = 854 sf, 64.40% Impervious, Inflow Depth = 2.52" for 10-Year event
 Inflow = 0.06 cfs @ 12.08 hrs, Volume= 180 cf
 Outflow = 0.06 cfs @ 12.08 hrs, Volume= 180 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 100-Year Rainfall=8.89"

Printed 6/24/2020

Page 9

Time span=0.00-72.00 hrs, dt=0.01 hrs, 7201 points x 3

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Dyn-Stor-Ind method - Pond routing by Dyn-Stor-Ind method

Subcatchment P-1: Subcat P-1

Runoff Area=13,527 sf 86.87% Impervious Runoff Depth=7.68"

Tc=5.0 min CN=90 Runoff=2.69 cfs 8,661 cf

Subcatchment P-2: Subcat P-2

Runoff Area=854 sf 64.40% Impervious Runoff Depth=6.10"

Tc=5.0 min CN=77 Runoff=0.14 cfs 434 cf

Reach SP1: Study Point 1

Inflow=2.69 cfs 8,661 cf

Outflow=2.69 cfs 8,661 cf

Reach SP2: Study Point 2

Inflow=0.14 cfs 434 cf

Outflow=0.14 cfs 434 cf

Total Runoff Area = 14,381 sf Runoff Volume = 9,095 cf Average Runoff Depth = 7.59"**14.47% Pervious = 2,080 sf 85.53% Impervious = 12,301 sf**

2729-01_Proposed-Conditions

Prepared by Allen & Major Associates Inc.

HydroCAD® 10.00-24 s/n 02881 © 2018 HydroCAD Software Solutions LLC

Type III 24-hr 100-Year Rainfall=8.89"

Printed 6/24/2020

Page 10

Summary for Subcatchment P-1: Subcat P-1

Runoff = 2.69 cfs @ 12.07 hrs, Volume= 8,661 cf, Depth= 7.68"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs

Type III 24-hr 100-Year Rainfall=8.89"

Area (sf)	CN	Description
4,430	98	Roofs, HSG A
1,776	39	>75% Grass cover, Good, HSG A
7,321	98	Paved parking, HSG A
13,527	90	Weighted Average
1,776		13.13% Pervious Area
11,751		86.87% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Subcatchment P-2: Subcat P-2

Runoff = 0.14 cfs @ 12.07 hrs, Volume= 434 cf, Depth= 6.10"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs

Type III 24-hr 100-Year Rainfall=8.89"

Area (sf)	CN	Description
304	39	>75% Grass cover, Good, HSG A
550	98	Paved parking, HSG A
854	77	Weighted Average
304		35.60% Pervious Area
550		64.40% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.0					Direct Entry, Assumed

Summary for Reach SP1: Study Point 1

Inflow Area = 13,527 sf, 86.87% Impervious, Inflow Depth = 7.68" for 100-Year event

Inflow = 2.69 cfs @ 12.07 hrs, Volume= 8,661 cf

Outflow = 2.69 cfs @ 12.07 hrs, Volume= 8,661 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Summary for Reach SP2: Study Point 2

Inflow Area = 854 sf, 64.40% Impervious, Inflow Depth = 6.10" for 100-Year event

Inflow = 0.14 cfs @ 12.07 hrs, Volume= 434 cf

Outflow = 0.14 cfs @ 12.07 hrs, Volume= 434 cf, Atten= 0%, Lag= 0.0 min

Routing by Dyn-Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.01 hrs / 3

Extreme Precipitation Tables

Northeast Regional Climate Center

Data represents point estimates calculated from partial duration series. All precipitation amounts are displayed in inches.

Smoothing	Yes
State	Massachusetts
Location	
Longitude	71.164 degrees West
Latitude	42.417 degrees North
Elevation	0 feet
Date/Time	Wed, 22 Jan 2020 13:40:55 -0500

Extreme Precipitation Estimates

	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.28	0.43	0.53	0.70	0.87	1.10	1yr	0.75	1.04	1.28	1.63	2.08	2.68	2.92	1yr	2.37	2.81	3.27	3.96	4.64	1yr
2yr	0.35	0.54	0.67	0.88	1.11	1.40	2yr	0.96	1.28	1.62	2.03	2.56	3.23	3.57	2yr	2.85	3.44	3.94	4.68	5.34	2yr
5yr	0.41	0.64	0.81	1.08	1.39	1.77	5yr	1.20	1.60	2.05	2.59	3.25	4.08	4.55	5yr	3.61	4.37	4.99	5.95	6.68	5yr
10yr	0.47	0.73	0.93	1.26	1.64	2.11	10yr	1.42	1.90	2.46	3.11	3.90	4.88	5.45	10yr	4.32	5.25	5.97	7.14	7.91	10yr
25yr	0.56	0.88	1.12	1.55	2.05	2.66	25yr	1.77	2.39	3.12	3.95	4.96	6.19	6.95	25yr	5.48	6.68	7.57	9.09	9.91	25yr
50yr	0.63	1.01	1.29	1.81	2.44	3.20	50yr	2.10	2.85	3.76	4.76	5.97	7.42	8.35	50yr	6.56	8.03	9.07	10.91	11.75	50yr
100yr	0.72	1.17	1.51	2.13	2.90	3.82	100yr	2.50	3.39	4.50	5.71	7.16	8.89	10.03	100yr	7.86	9.65	10.86	13.10	13.95	100yr
200yr	0.83	1.35	1.74	2.50	3.45	4.57	200yr	2.97	4.03	5.40	6.86	8.59	10.65	12.07	200yr	9.42	11.60	13.02	15.73	16.56	200yr
500yr	1.00	1.64	2.14	3.10	4.34	5.80	500yr	3.74	5.08	6.86	8.74	10.94	13.54	15.41	500yr	11.98	14.82	16.54	20.06	20.78	500yr

Lower Confidence Limits

	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.24	0.38	0.46	0.62	0.76	0.84	1yr	0.66	0.83	1.14	1.43	1.77	2.41	2.48	1yr	2.14	2.38	2.92	3.52	4.01	1yr
2yr	0.33	0.51	0.63	0.85	1.05	1.26	2yr	0.91	1.23	1.44	1.91	2.47	3.12	3.45	2yr	2.76	3.32	3.80	4.52	5.17	2yr
5yr	0.39	0.60	0.74	1.02	1.30	1.50	5yr	1.12	1.47	1.72	2.24	2.87	3.75	4.15	5yr	3.32	3.99	4.57	5.45	6.14	5yr
10yr	0.43	0.67	0.82	1.15	1.49	1.72	10yr	1.28	1.68	1.94	2.52	3.23	4.32	4.80	10yr	3.83	4.61	5.24	6.25	7.00	10yr
25yr	0.50	0.76	0.95	1.35	1.78	2.04	25yr	1.53	1.99	2.29	2.95	3.76	5.19	5.78	25yr	4.59	5.56	6.29	7.47	8.28	25yr
50yr	0.55	0.84	1.05	1.51	2.03	2.34	50yr	1.75	2.29	2.60	3.33	4.23	5.94	6.65	50yr	5.26	6.39	7.20	8.51	9.40	50yr
100yr	0.62	0.93	1.17	1.69	2.32	2.66	100yr	2.00	2.60	2.94	3.61	4.75	6.83	7.64	100yr	6.04	7.35	8.26	9.67	10.68	100yr
200yr	0.69	1.04	1.32	1.92	2.67	3.04	200yr	2.31	2.97	3.34	4.04	5.35	7.83	8.79	200yr	6.93	8.45	9.46	10.96	12.10	200yr
500yr	0.81	1.21	1.55	2.25	3.21	3.62	500yr	2.77	3.54	3.93	4.69	6.27	9.39	10.55	500yr	8.31	10.15	11.32	12.90	14.25	500yr

Upper Confidence Limits

	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.31	0.48	0.58	0.79	0.97	1.13	1yr	0.83	1.11	1.32	1.76	2.25	2.86	3.16	1yr	2.53	3.04	3.51	4.30	5.03	1yr
2yr	0.36	0.56	0.69	0.93	1.15	1.36	2yr	0.99	1.33	1.57	2.07	2.67	3.35	3.73	2yr	2.97	3.59	4.10	4.88	5.54	2yr
5yr	0.45	0.69	0.86	1.18	1.50	1.78	5yr	1.30	1.74	2.05	2.65	3.37	4.44	5.00	5yr	3.93	4.81	5.43	6.47	7.22	5yr
10yr	0.55	0.84	1.04	1.45	1.88	2.19	10yr	1.62	2.14	2.54	3.20	4.04	5.52	6.25	10yr	4.89	6.01	6.74	8.04	8.84	10yr
25yr	0.71	1.08	1.34	1.92	2.52	2.89	25yr	2.18	2.82	3.37	4.13	5.14	7.34	8.43	25yr	6.50	8.11	8.96	10.76	11.58	25yr
50yr	0.86	1.31	1.63	2.34	3.15	3.57	50yr	2.72	3.49	4.17	5.02	6.17	9.12	10.57	50yr	8.07	10.16	11.11	13.43	14.21	50yr
100yr	1.05	1.59	1.99	2.87	3.94	4.39	100yr	3.40	4.30	5.18	6.33	7.40	11.34	13.27	100yr	10.04	12.76	13.79	16.80	17.48	100yr
200yr	1.28	1.92	2.44	3.53	4.92	5.43	200yr	4.25	5.30	6.43	7.72	8.88	14.11	16.67	200yr	12.49	16.03	17.14	21.02	21.51	200yr
500yr	1.67	2.48	3.19	4.63	6.59	7.15	500yr	5.69	6.99	8.57	10.06	11.30	18.86	22.55	500yr	16.69	21.69	22.82	28.32	28.35	500yr




United States
Department of
Agriculture

NRCS

Natural
Resources
Conservation
Service

A product of the National
Cooperative Soil Survey,
a joint effort of the United
States Department of
Agriculture and other
Federal agencies, State
agencies including the
Agricultural Experiment
Stations, and local
participants

Custom Soil Resource Report for **Middlesex County, Massachusetts**

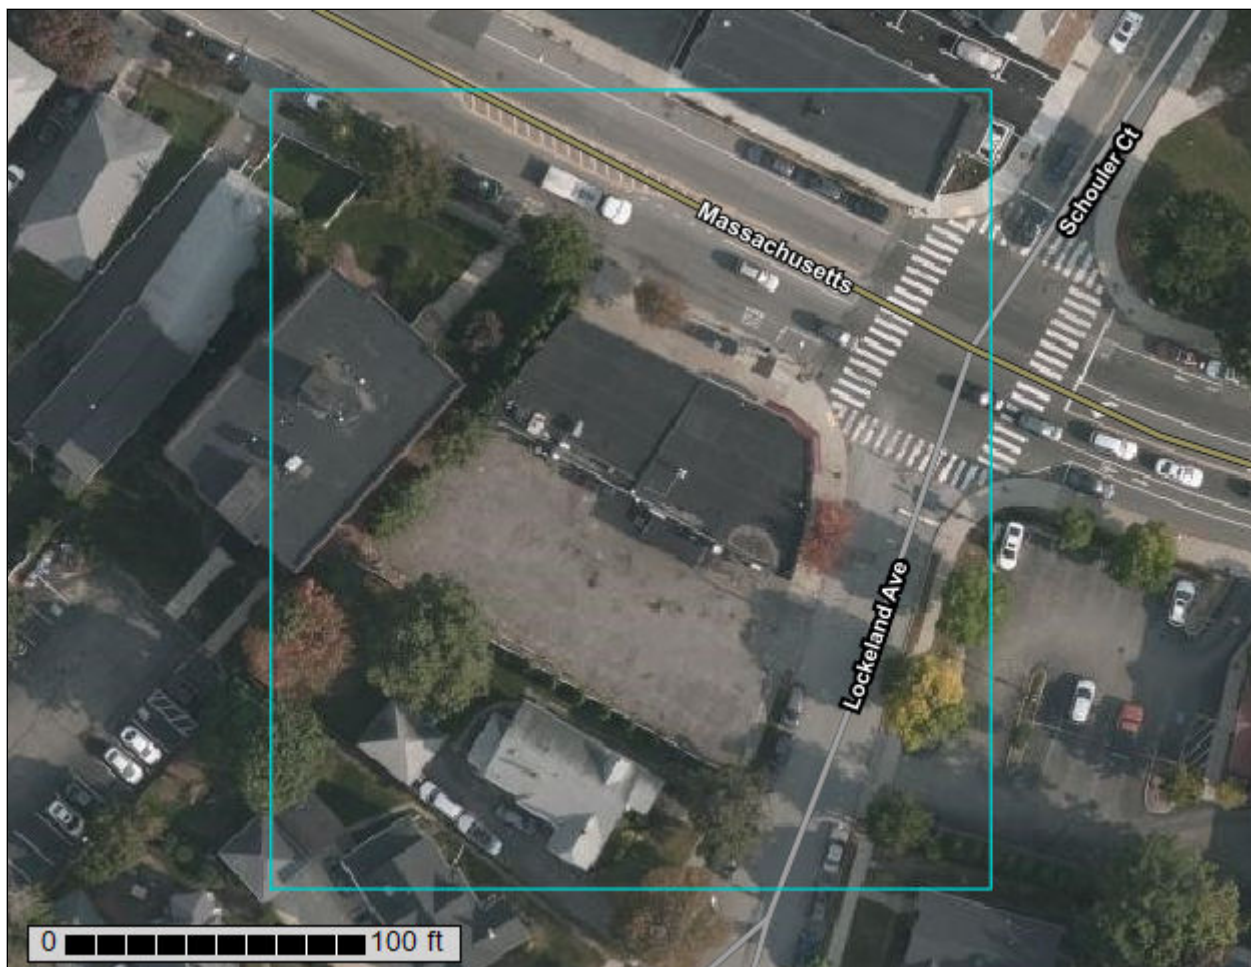

Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface	2
How Soil Surveys Are Made	5
Soil Map	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
Middlesex County, Massachusetts.....	13
602—Urban land.....	13
626B—Merrimac-Urban land complex, 0 to 8 percent slopes.....	13
Soil Information for All Uses	16
Soil Properties and Qualities.....	16
Soil Physical Properties.....	16
Saturated Hydraulic Conductivity (Ksat).....	16
Soil Qualities and Features.....	19
Hydrologic Soil Group.....	19
References	24

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and


Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report Soil Map

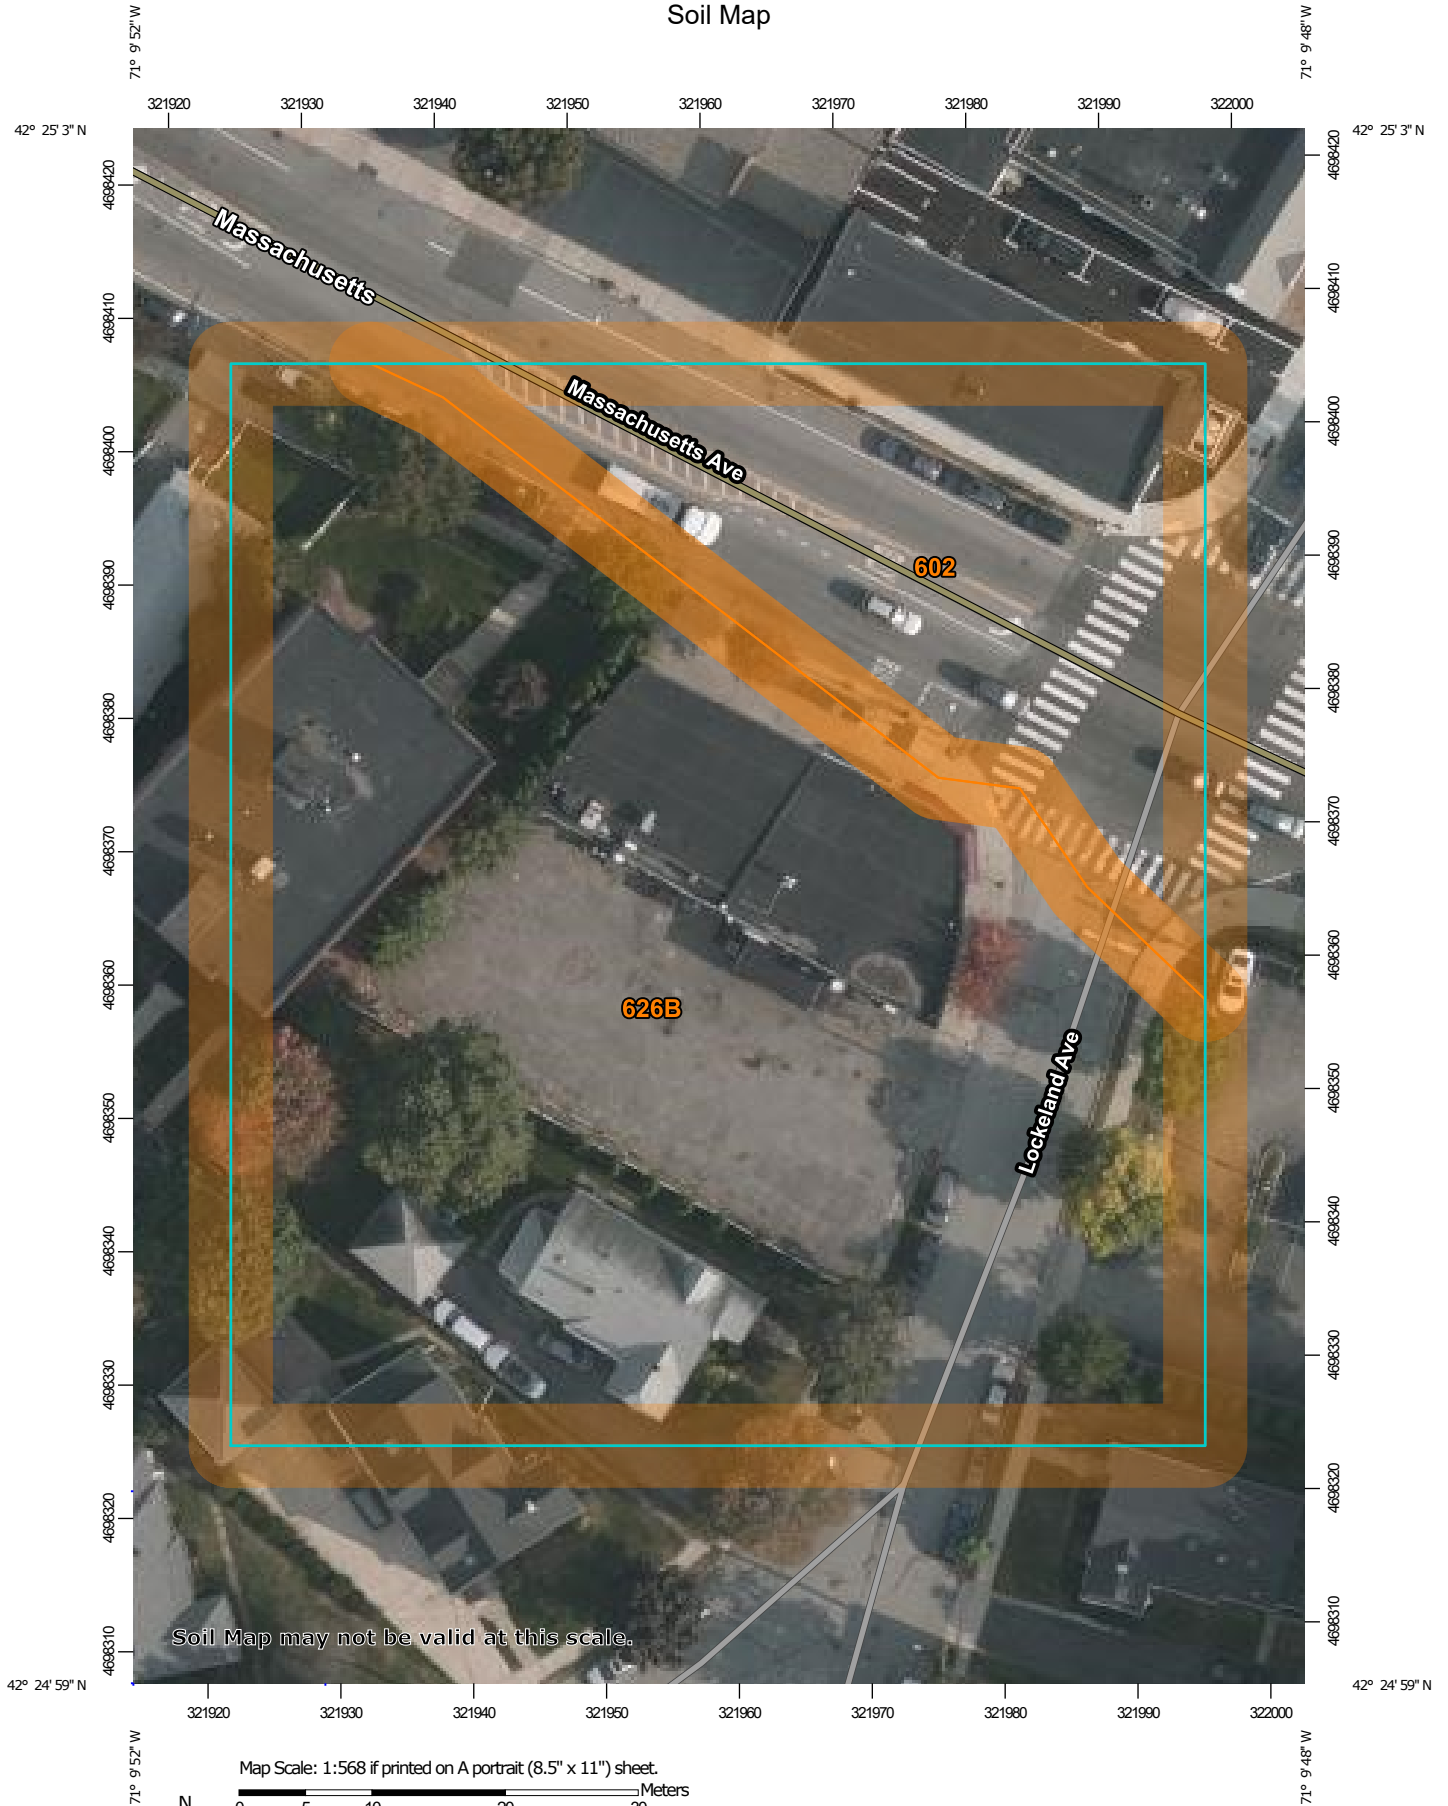

Soil Map may not be valid at this scale.

Map Scale: 1:568 if printed on A portrait (8.5" x 11") sheet.
0 5 10 20 30 Meters
0 25 50 100 150 Feet
Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 19N WGS84

Custom Soil Resource Report

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)

Soils


 Soil Map Unit Polygons

 Soil Map Unit Lines

 Soil Map Unit Points

Special Point Features

 Blowout

 Borrow Pit


 Clay Spot

 Closed Depression

 Gravel Pit

 Gravelly Spot


 Landfill

 Lava Flow

 Marsh or swamp

 Mine or Quarry

 Miscellaneous Water


 Perennial Water

 Rock Outcrop

 Saline Spot

 Sandy Spot

 Severely Eroded Spot

 Sinkhole

 Slide or Slip

 Sodic Spot

 Spoil Area

 Stony Spot

 Very Stony Spot

 Wet Spot

 Other

 Special Line Features

Water Features

 Streams and Canals

Transportation

 Rails

 Interstate Highways

 US Routes

 Major Roads

 Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:25,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Middlesex County, Massachusetts
Survey Area Data: Version 19, Sep 12, 2019

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 11, 2019—Oct 5, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
602	Urban land	0.3	23.4%
626B	Merrimac-Urban land complex, 0 to 8 percent slopes	1.1	76.6%
Totals for Area of Interest		1.5	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however,

Custom Soil Resource Report

onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Middlesex County, Massachusetts

602—Urban land

Map Unit Setting

National map unit symbol: 9950
Elevation: 0 to 3,000 feet
Mean annual precipitation: 32 to 50 inches
Mean annual air temperature: 45 to 50 degrees F
Frost-free period: 110 to 200 days
Farmland classification: Not prime farmland

Map Unit Composition

Urban land: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Urban Land

Setting

Landform position (two-dimensional): Footslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Excavated and filled land

Minor Components

Rock outcrop

Percent of map unit: 5 percent
Landform: Ledges
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Head slope
Down-slope shape: Concave
Across-slope shape: Concave

Udorthents, wet substratum

Percent of map unit: 5 percent
Hydric soil rating: No

Udorthents, loamy

Percent of map unit: 5 percent
Hydric soil rating: No

626B—Merrimac-Urban land complex, 0 to 8 percent slopes

Map Unit Setting

National map unit symbol: 2tyr9
Elevation: 0 to 820 feet
Mean annual precipitation: 36 to 71 inches

Custom Soil Resource Report

Mean annual air temperature: 39 to 55 degrees F

Frost-free period: 140 to 250 days

Farmland classification: Not prime farmland

Map Unit Composition

Merrimac and similar soils: 45 percent

Urban land: 40 percent

Minor components: 15 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Merrimac

Setting

Landform: Moraines, outwash plains, kames, eskers, outwash terraces

Landform position (two-dimensional): Backslope, footslope, summit, shoulder

Landform position (three-dimensional): Side slope, crest, riser, tread

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loamy glaciofluvial deposits derived from granite, schist, and gneiss over sandy and gravelly glaciofluvial deposits derived from granite, schist, and gneiss

Typical profile

Ap - 0 to 10 inches: fine sandy loam

Bw1 - 10 to 22 inches: fine sandy loam

Bw2 - 22 to 26 inches: stratified gravel to gravelly loamy sand

2C - 26 to 65 inches: stratified gravel to very gravelly sand

Properties and qualities

Slope: 0 to 8 percent

Depth to restrictive feature: More than 80 inches

Natural drainage class: Somewhat excessively drained

Runoff class: Very low

Capacity of the most limiting layer to transmit water (Ksat): Moderately high to very high (1.42 to 99.90 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum in profile: 2 percent

Salinity, maximum in profile: Nonsaline (0.0 to 1.4 mmhos/cm)

Sodium adsorption ratio, maximum in profile: 1.0

Available water storage in profile: Low (about 4.6 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e

Hydrologic Soil Group: A

Hydric soil rating: No

Description of Urban Land

Typical profile

M - 0 to 10 inches: cemented material

Properties and qualities

Slope: 0 to 8 percent

Depth to restrictive feature: 0 inches to manufactured layer

Custom Soil Resource Report

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Very low (0.00 to 0.00 in/hr)

Available water storage in profile: Very low (about 0.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydrologic Soil Group: D

Hydric soil rating: Unranked

Minor Components

Windsor

Percent of map unit: 5 percent

Landform: Deltas, outwash plains, dunes, outwash terraces

Landform position (three-dimensional): Riser, tread

Down-slope shape: Linear, convex

Across-slope shape: Linear, convex

Hydric soil rating: No

Sudbury

Percent of map unit: 5 percent

Landform: Terraces, deltas, outwash plains

Landform position (two-dimensional): Footslope

Landform position (three-dimensional): Tread, dip

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Hinckley

Percent of map unit: 5 percent

Landform: Deltas, outwash plains, kames, eskers

Landform position (two-dimensional): Summit, shoulder, backslope

Landform position (three-dimensional): Nose slope, crest, head slope, side slope, rise

Down-slope shape: Convex

Across-slope shape: Convex, linear

Hydric soil rating: No

Soil Information for All Uses

Soil Properties and Qualities

The Soil Properties and Qualities section includes various soil properties and qualities displayed as thematic maps with a summary table for the soil map units in the selected area of interest. A single value or rating for each map unit is generated by aggregating the interpretive ratings of individual map unit components. This aggregation process is defined for each property or quality.

Soil Physical Properties

Soil Physical Properties are measured or inferred from direct observations in the field or laboratory. Examples of soil physical properties include percent clay, organic matter, saturated hydraulic conductivity, available water capacity, and bulk density.


Saturated Hydraulic Conductivity (Ksat)

Saturated hydraulic conductivity (Ksat) refers to the ease with which pores in a saturated soil transmit water. The estimates are expressed in terms of micrometers per second. They are based on soil characteristics observed in the field, particularly structure, porosity, and texture. Saturated hydraulic conductivity is considered in the design of soil drainage systems and septic tank absorption fields.

For each soil layer, this attribute is actually recorded as three separate values in the database. A low value and a high value indicate the range of this attribute for the soil component. A "representative" value indicates the expected value of this attribute for the component. For this soil property, only the representative value is used.


The numeric Ksat values have been grouped according to standard Ksat class limits.

Custom Soil Resource Report
Map—Saturated Hydraulic Conductivity (Ksat)

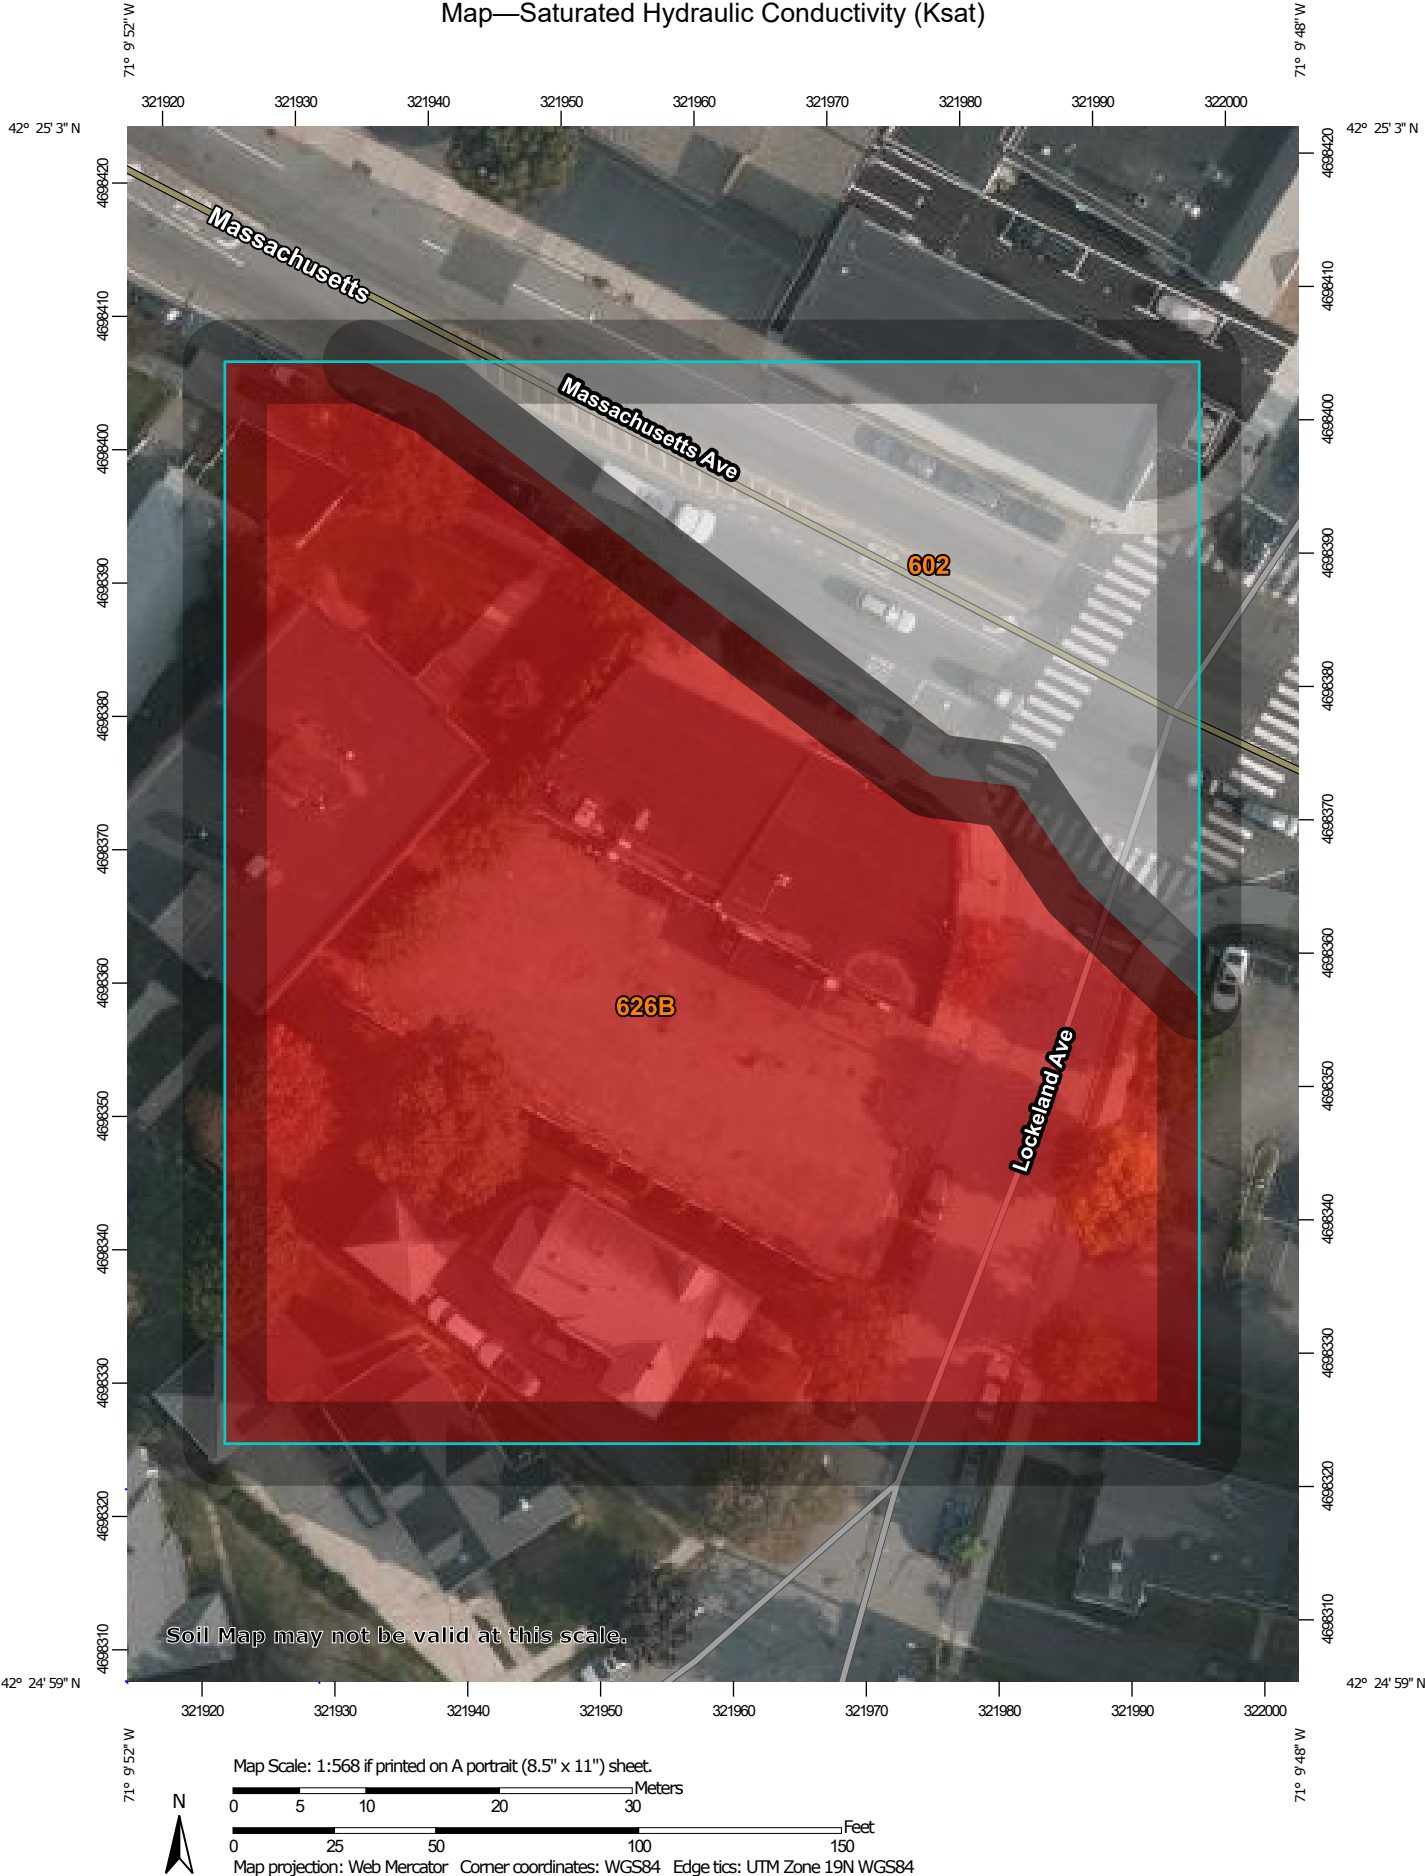


MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)


Soils

Soil Rating Polygons

 = 100.0000


 Not rated or not available


Soil Rating Lines

 = 100.0000


 Not rated or not available

Soil Rating Points


 = 100.0000

 Not rated or not available

Water Features

 Streams and Canals


Transportation

 Rails


 Interstate Highways

 US Routes

 Major Roads

 Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:25,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Middlesex County, Massachusetts
Survey Area Data: Version 19, Sep 12, 2019

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 11, 2019—Oct 5, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Table—Saturated Hydraulic Conductivity (Ksat)

Map unit symbol	Map unit name	Rating (micrometers per second)	Acres in AOI	Percent of AOI
602	Urban land		0.3	23.4%
626B	Merrimac-Urban land complex, 0 to 8 percent slopes	100.0000	1.1	76.6%
Totals for Area of Interest			1.5	100.0%

Rating Options—Saturated Hydraulic Conductivity (Ksat)

Units of Measure: micrometers per second

Aggregation Method: Dominant Component

Component Percent Cutoff: None Specified

Tie-break Rule: Fastest

Interpret Nulls as Zero: No

Layer Options (Horizon Aggregation Method): Depth Range (Weighted Average)

Top Depth: 24

Bottom Depth: 90

Units of Measure: Centimeters

Soil Qualities and Features

Soil qualities are behavior and performance attributes that are not directly measured, but are inferred from observations of dynamic conditions and from soil properties. Example soil qualities include natural drainage, and frost action. Soil features are attributes that are not directly part of the soil. Example soil features include slope and depth to restrictive layer. These features can greatly impact the use and management of the soil.

Hydrologic Soil Group

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Custom Soil Resource Report

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.


Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.


Custom Soil Resource Report
Map—Hydrologic Soil Group

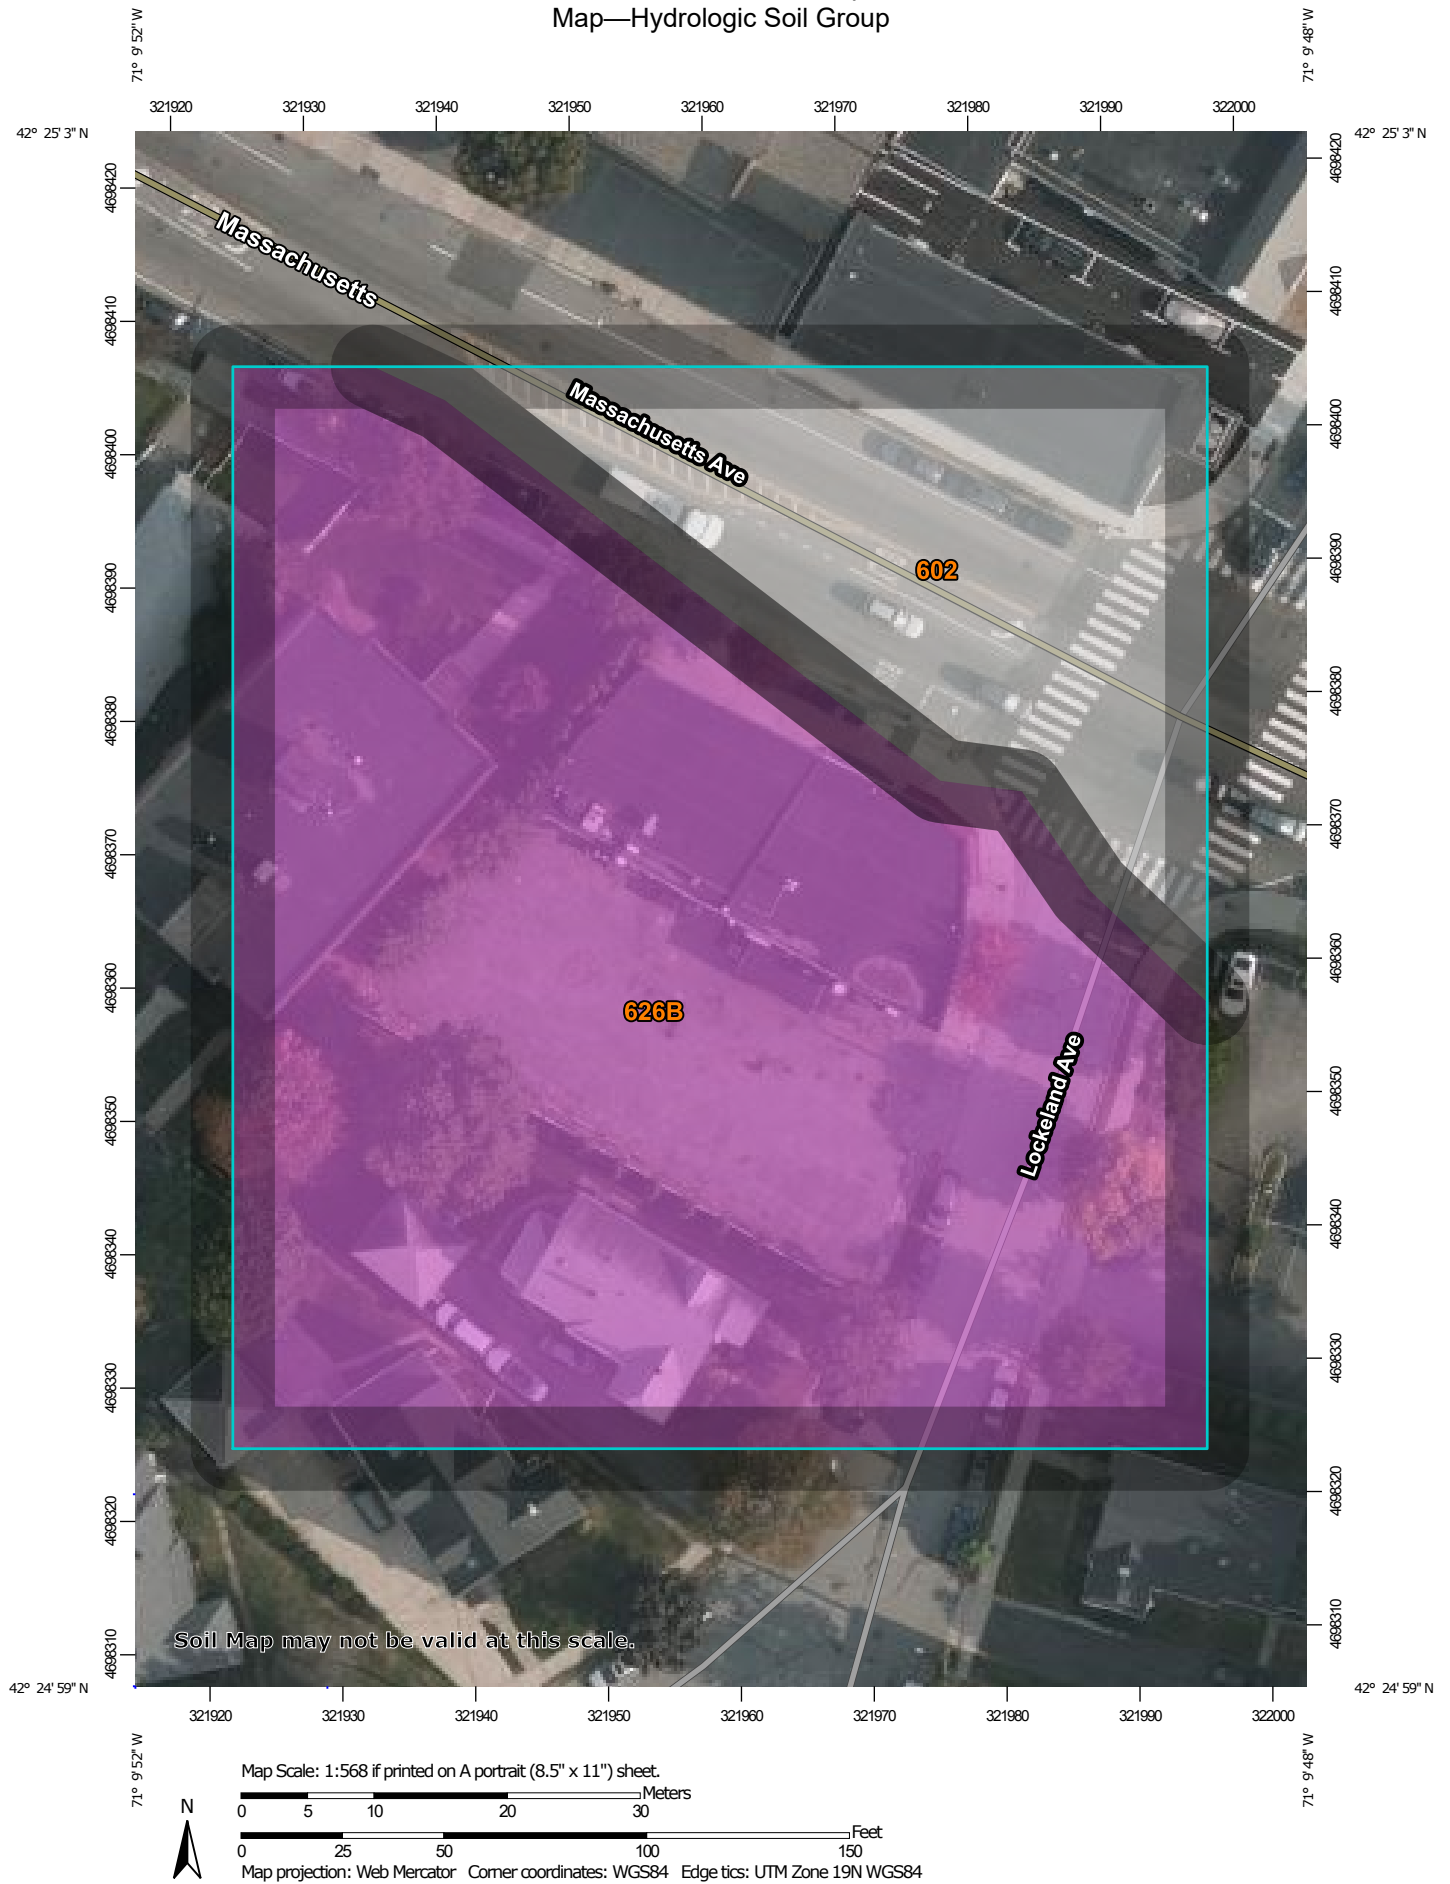

Custom Soil Resource Report








MAP LEGEND

Area of Interest (AOI)









 Area of Interest (AOI)

Soils

Soil Rating Polygons





 A
 A/D
 B
 B/D
 C
 C/D
 D
 Not rated or not available

Soil Rating Lines


 A
 A/D
 B
 B/D
 C
 C/D
 D
 Not rated or not available

Soil Rating Points






 A
 A/D
 B
 B/D

 C
 C/D
 D
 Not rated or not available

Water Features

 Streams and Canals

Transportation

 Rails
 Interstate Highways
 US Routes
 Major Roads
 Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:25,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Middlesex County, Massachusetts
Survey Area Data: Version 19, Sep 12, 2019

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 11, 2019—Oct 5, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Table—Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
602	Urban land		0.3	23.4%
626B	Merrimac-Urban land complex, 0 to 8 percent slopes	A	1.1	76.6%
Totals for Area of Interest			1.5	100.0%

Rating Options—Hydrologic Soil Group

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher

References


- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelpdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

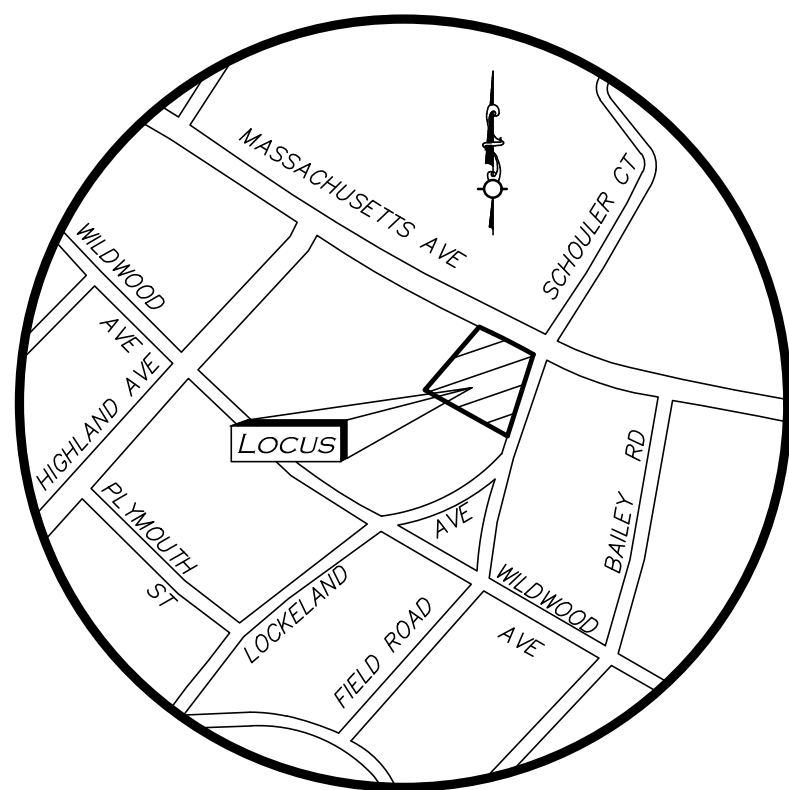

LOCUS MAP
NOT TO SCALE

SITE DEVELOPMENT PLAN SET


882-892 MASSACHUSETTS AVE

ARLINGTON, MA 02476

APPLICANT:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

ARCHITECT:
MARKET SQUARE ARCHITECTS
104 CONGRESS STREET, STE 203
PORTSMOUTH, NH 03801
(603) 501-0202

**CIVIL ENGINEER, LANDSCAPE ARCHITECT &
LAND SURVEYOR:**
ALLEN & MAJOR ASSOCIATES, INC.
100 COMMERCE WAY, SUITE 5
WOBURN, MA 01801
(781) 985-6889

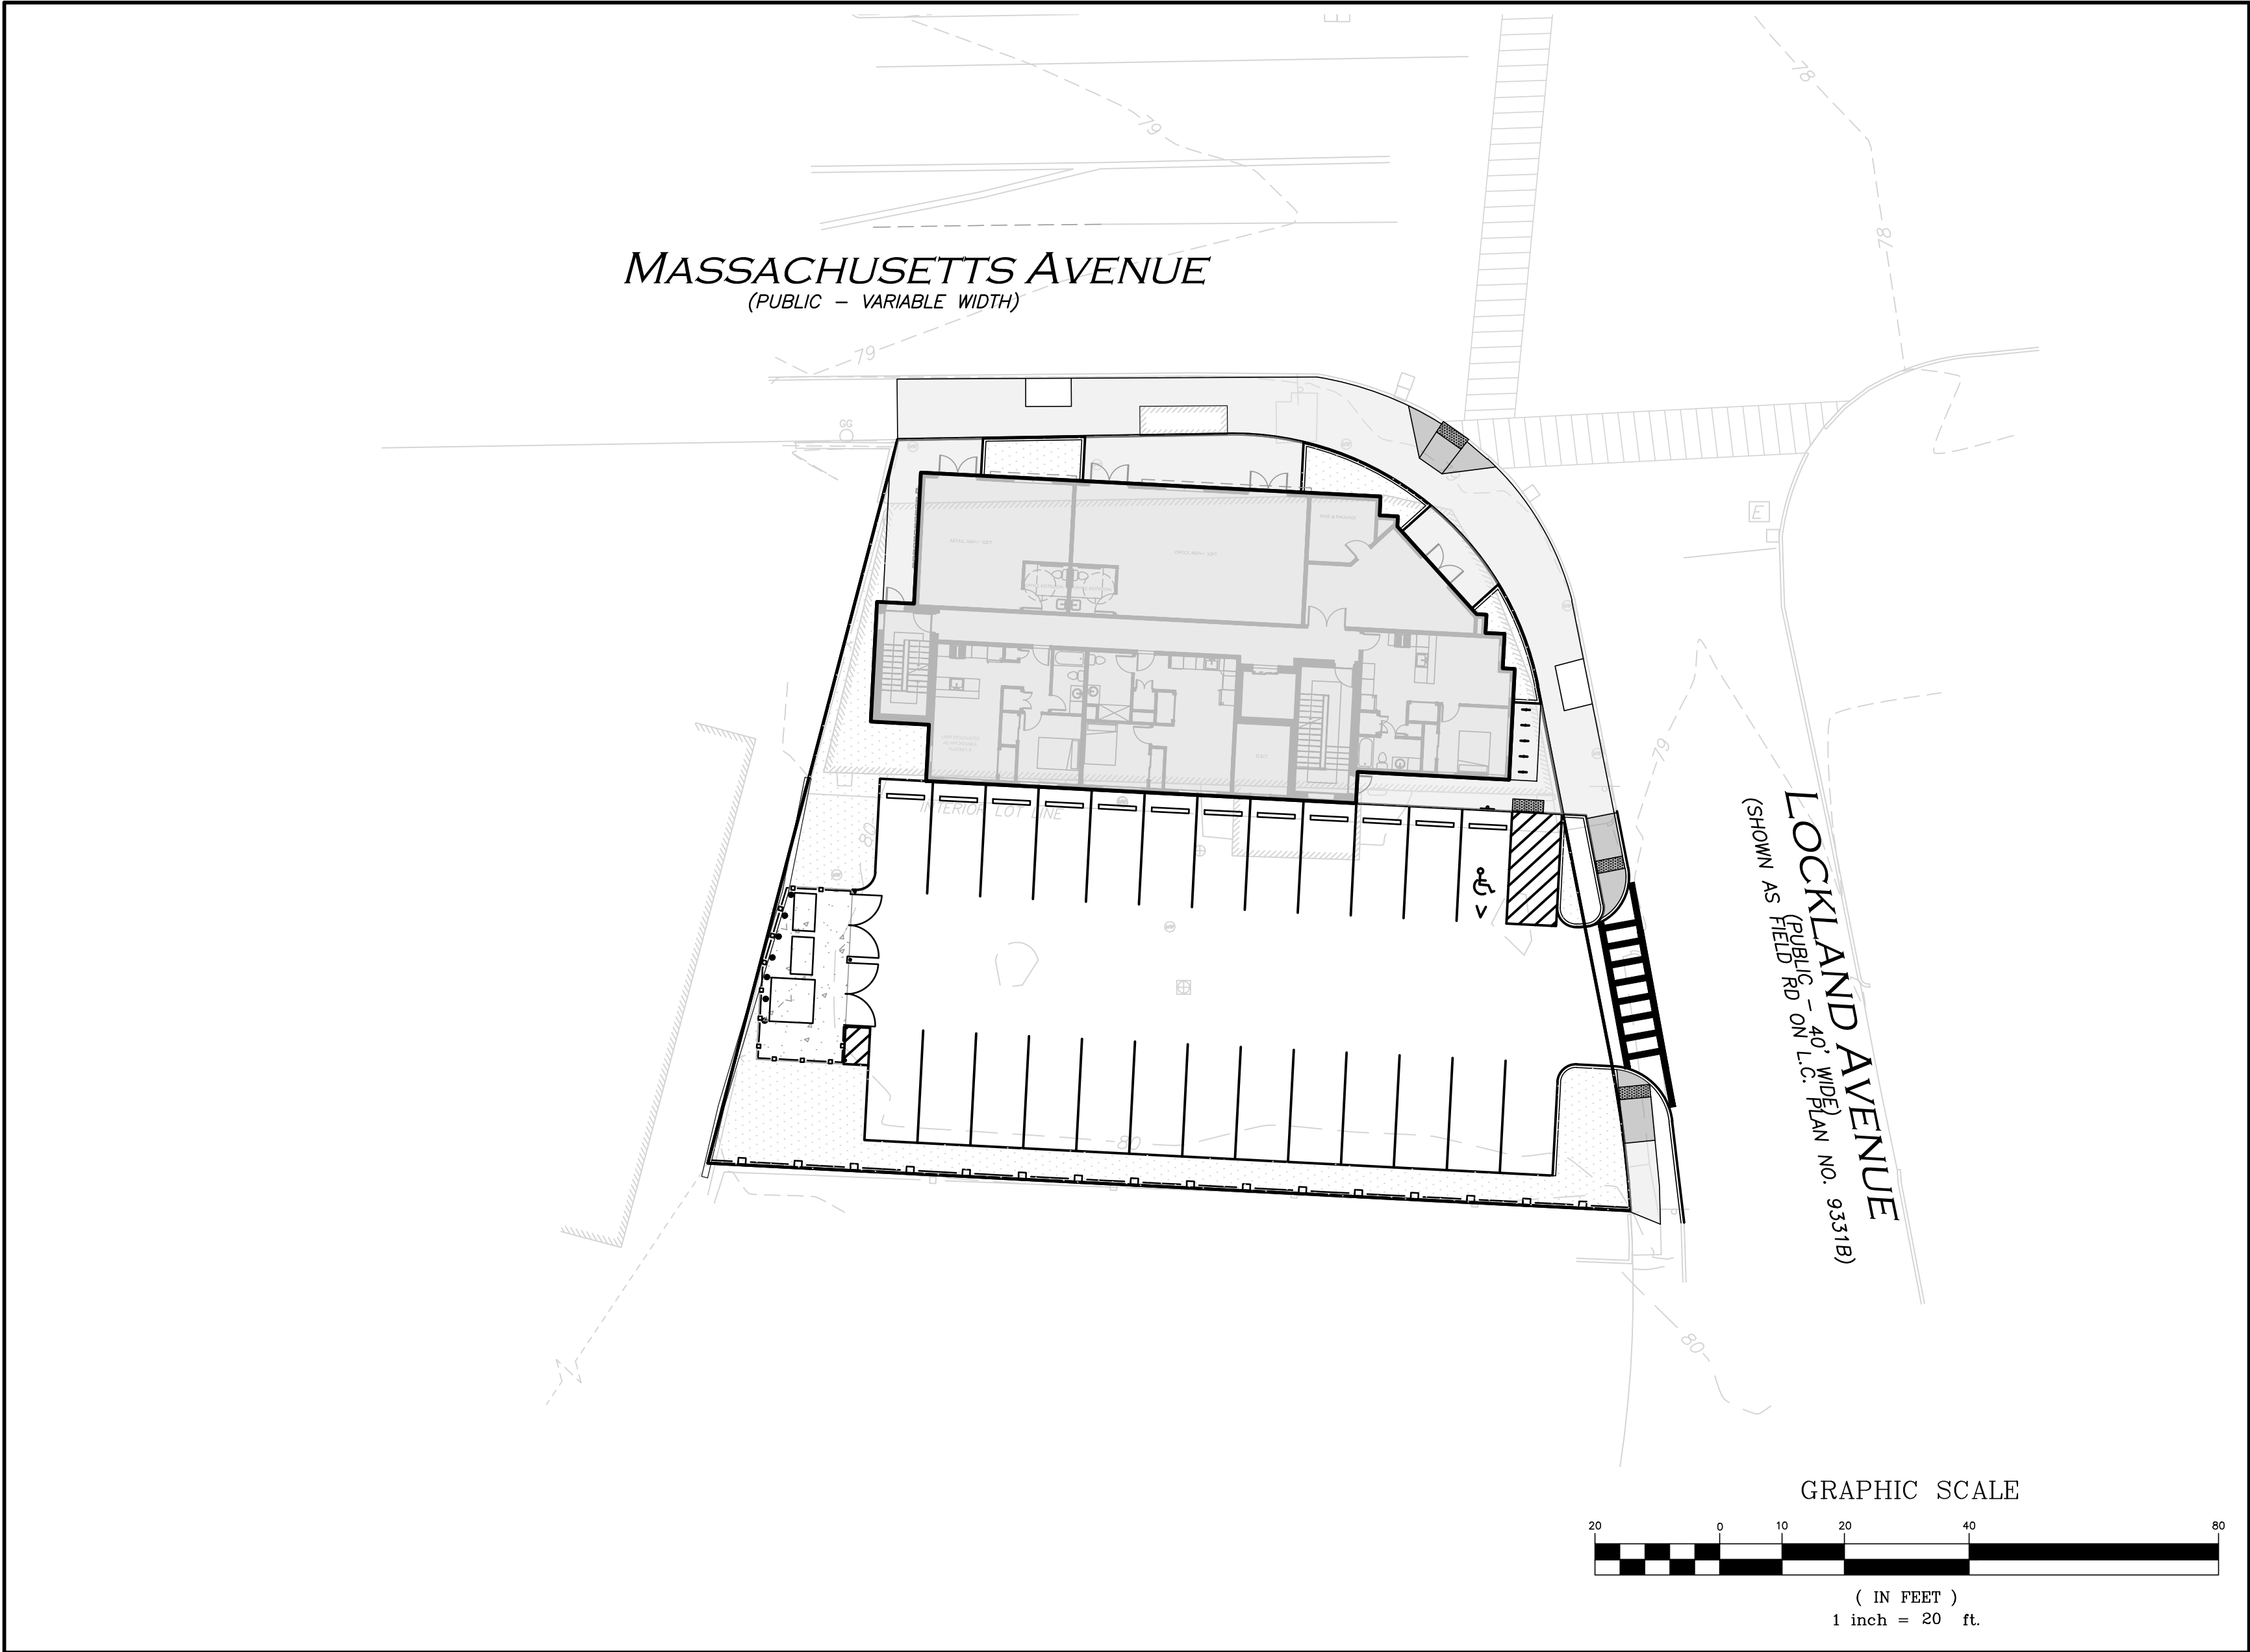

LIST OF DRAWINGS			
DRAWING TITLE	SHEET	ISSUED	REVISED
EXISTING CONDITIONS	V-101	4/10/2020	-
SITE PREPARATION PLAN	C-101	4/10/2020	6/23/2020
LAYOUT & MATERIALS PLAN	C-102	4/10/2020	6/23/2020
GRADING & DRAINAGE PLAN	C-103	4/10/2020	6/23/2020
UTILITIES PLAN	C-104	4/10/2020	6/23/2020
DETAILS	C-501	4/10/2020	6/23/2020
DETAILS	C-502	4/10/2020	6/23/2020
DETAILS	C-503	4/10/2020	6/23/2020
LANDSCAPE PLAN	L-101	4/10/2020	6/23/2020
LANDSCAPE DETAILS	L-501	4/10/2020	6/23/2020




PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

PREPARED BY:





**ALLEN & MAJOR
ASSOCIATES, INC.**
civil engineering ♦ land surveying
environmental consulting ♦ landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896
WOBURN, MA ♦ LAKEVILLE, MA ♦ MANCHESTER, NH

ISSUED FOR ARB REVIEW: 4/10/2020
ISSUED FOR ARB REVIEW: 6/23/2020

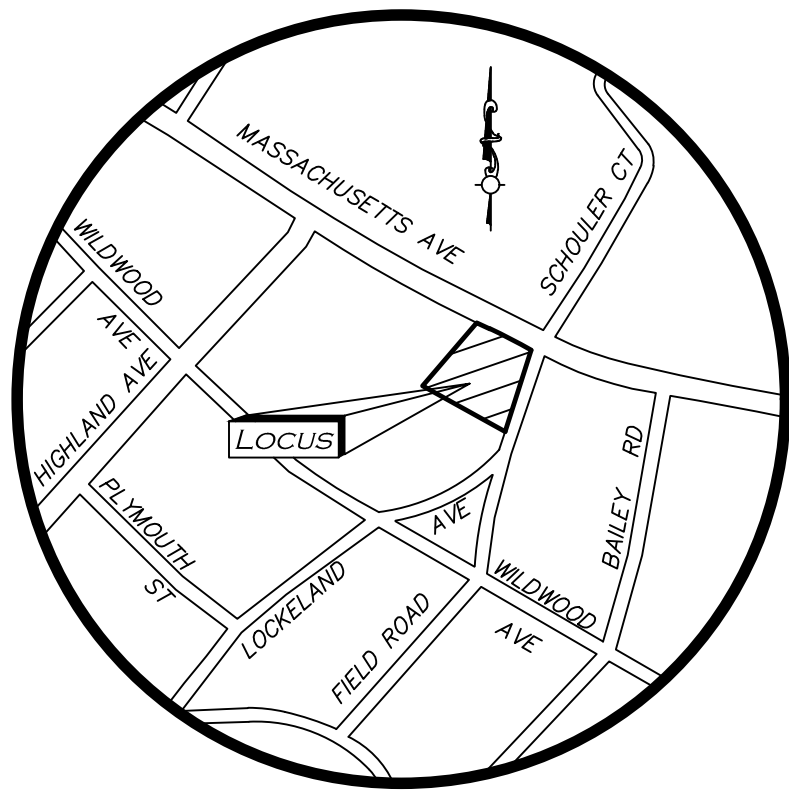

LOCUS MAP
(NOT TO SCALE)

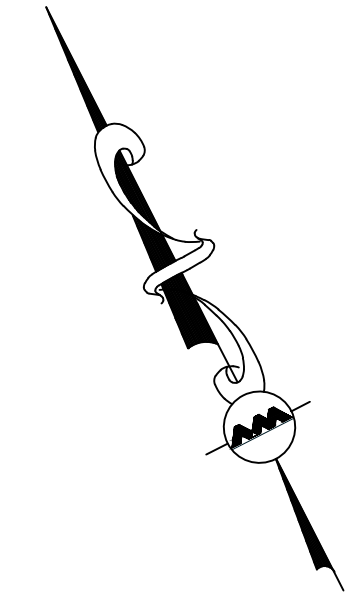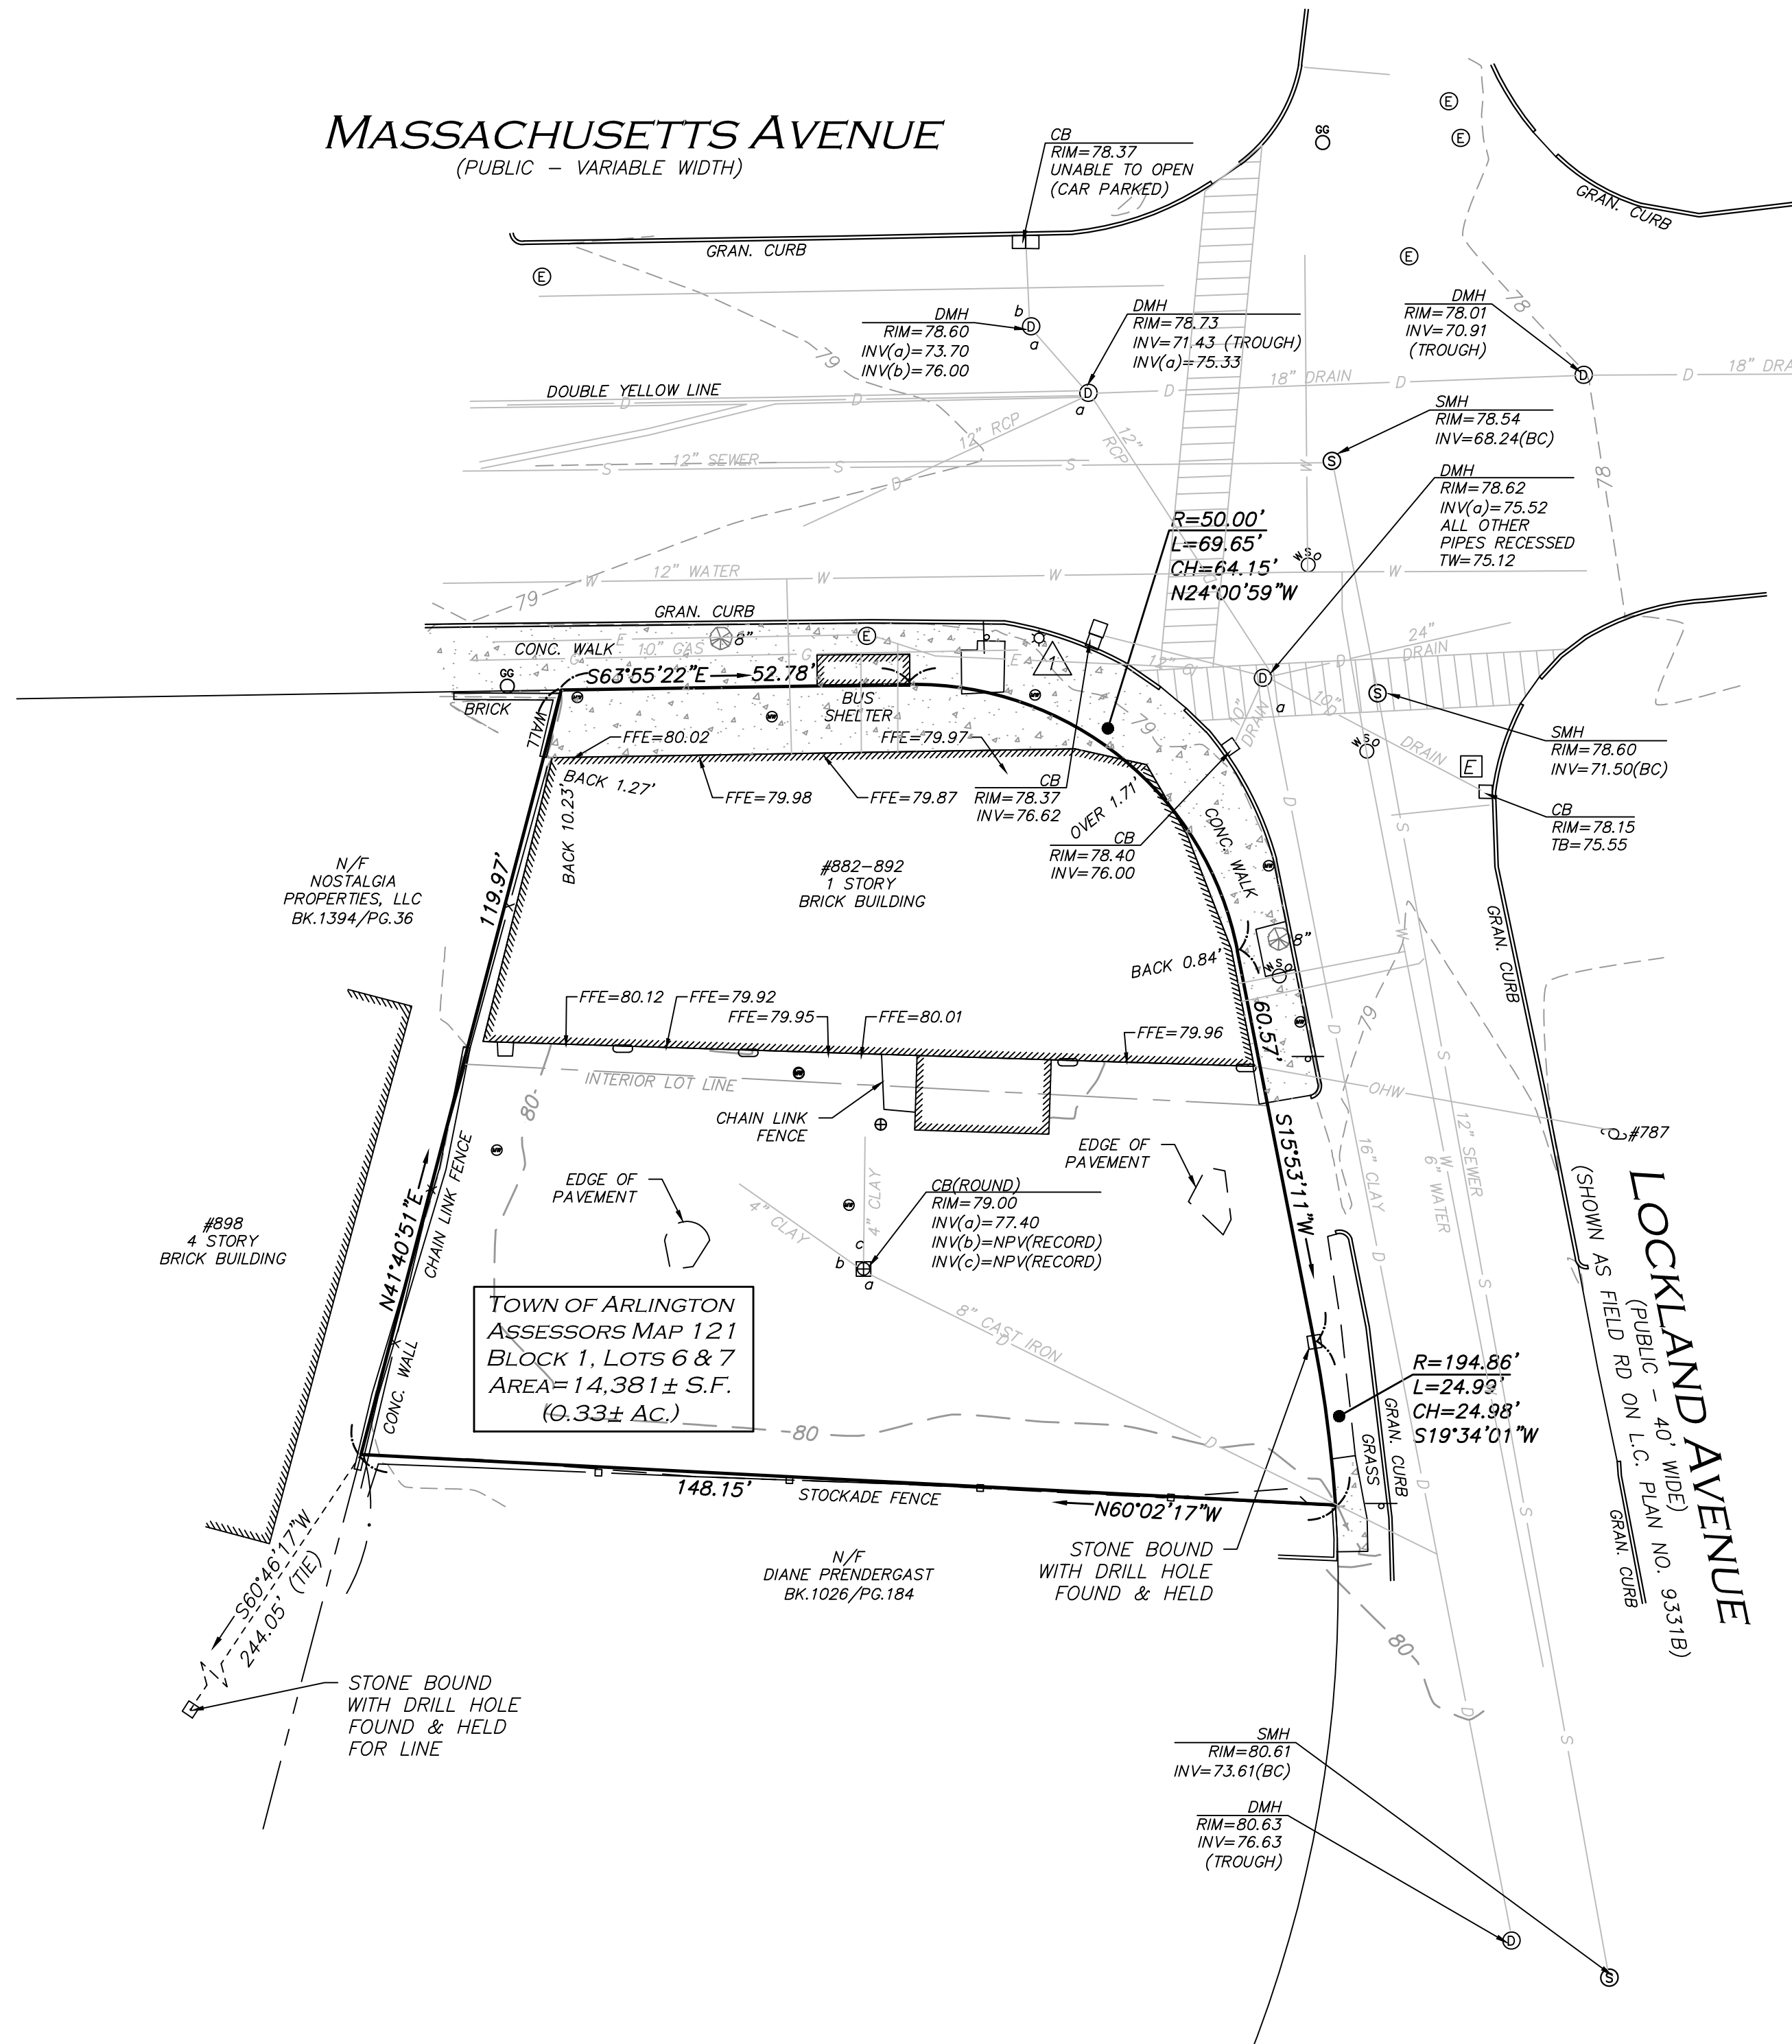

LEGEND

STONE BOUND (SB)	⊞
DRAIN MANHOLE (DMH)	⊕
SEWER MANHOLE (SMH)	⊙
ELECTRIC MANHOLE (EMH)	⊖
MISC. MANHOLE (MH)	⊗
TELEPHONE MANHOLE (TMH)	⊘
CATCH BASIN (CB)	⊡
ROUND CATCH BASIN (RCB)	⊢
MONITOR WELL	⊞
DOWNSPOUT	⊞
WATER GATE	⊞
GAS GATE	⊞
BOLLARD	⊞
TREE	⊞
CONCRETE	⊞
BUILDING	⊞
1' CONTOUR	---53---
5' CONTOUR	---55---
PROPERTY LINE	---
ABUTTERS LINE	---
EDGE OF PAVEMENT	---
CURB	---
CHAIN LINK FENCE	x
STOCKADE FENCE	⊞
WATER LINE	---
SEWER LINE	---
DRAIN LINE	---
GAS LINE	---
ELECTRIC LINE	---
TELEPHONE LINE	---
FINISHED FLOOR ELEVATION	FFE
BITUMINOUS	BIT.
CONCRETE	CONC.
GRANITE	GRAN.
NOW OR FORMERLY	N/F
BOOK	BK.
PAGE	PG.
CERTIFICATE OF TITLE	COT
LAND COURT	L.C.
LAND COURT CASE	L.C.C.

LOCUS REFERENCES

- TOWN OF ARLINGTON ASSESSORS MAP 26, BLOCK 1, LOTS 6 & 7.
- RECORD OWNER: 882-892 MASSACHUSETTS AVENUE, LLC
- L.C. BOOK 1523, PAGE 101
- L.C.C. #9331E

PLAN REFERENCES

- L.C.C. 9331B
- L.C.C. 13975B

NOTES

- NORTH ARROW IS BASED ON MASSACHUSETTS GRID COORDINATE SYSTEM (MAINLAND ZONE) (NAD 83).
- BOOK/PAGE AND PLAN REFERENCES ARE TAKEN FROM MIDDLESEX (SOUTH) REGISTRY OF DEEDS IN CAMBRIDGE, MA.
- VERTICAL DATUM IS NAVD 88 ESTABLISHED USING RTK GPS OBSERVATION.
- CONTOUR INTERVAL IS ONE FOOT (1').
- THERE WERE NO STRIPED PARKING SPACES OBSERVED ON SITE AT THE TIME OF SURVEY.

GRAPHIC SCALE



(IN FEET)
1 inch = 20 ft.

N:\PROJECTS\2729-01\SURVEY\DRAWINGS\CURRENT\S-2729-01-EC.DWG
F001 ??? PG. ???

WE HEREBY CERTIFY THAT THIS PLAN IS THE
RESULT OF AN ACTUAL ON THE GROUND
SURVEY PERFORMED ON DECEMBER 12, 2019.

04/10/20
PROFESSIONAL LAND SURVEYOR FOR
ALLEN & MAJOR ASSOCIATES, INC.

APR 10, 2020
NORMAN I. LIPSITZ
No. 28446
PROFESSIONAL
LAND SURVEYOR

REV	DATE	DESCRIPTION
-----	------	-------------

APPLICANT/OWNER:
FRANK PASCIUTO
455 MASSACHUSETTS AVENUE, STE 1
ARLINGTON, MA 02474

PROJECT:
**892 MASSACHUSETTS
AVENUE
ARLINGTON, MA**

PROJECT NO.	2729-01	DATE:	01/14/20
-------------	---------	-------	----------

SCALE:	1" = 20'	DWG. NAME:	S-2729-01-EC
--------	----------	------------	--------------

DRAFTED BY:	AJR	CHECKED BY:	NIL
-------------	-----	-------------	-----

PREPARED BY:

**ALLEN & MAJOR
ASSOCIATES, INC.**
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801-8501
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN ELECTRONIC FORMAT.
CLIENT/CLIENTS REPRESENTATIVE OR CONSULTANT MAY BE
PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS ON MAGNETIC
MEDIA FOR HIS/HER INFORMATION AND USE FOR SPECIFIC
APPLICATION TO THIS PROJECT. DUE TO THE POTENTIAL THAT THE
MAGNETIC INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR
OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL
INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE MAGNETIC
MEDIA. PRINTED REPRESENTATIONS OF THE DRAWINGS AND
SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF
ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET NO.
----------------	-----------

EXISTING CONDITIONS	V-101
---------------------	-------

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved


UTILITY STATEMENT

THE UTILITIES SHOWN HAVE BEEN LOCATED FROM FIELD
SURVEY INFORMATION AND EXISTING DRAWINGS. ALLEN &
MAJOR ASSOCIATES, INC. (A&M) MAKES NO GUARANTEE
THAT THE UTILITIES SHOWN HEREON COMPRISE ALL SUCH
UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED.
A&M FURTHER DOES NOT WARRANT THAT THE UTILITIES
SHOWN ARE IN THE EXACT LOCATION INDICATED. A&M HAS
NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES.

BENCHMARK SUMMARY

TBM #	DESCRIPTION	ELEV.
△	CHISEL SQUARE ON LIGHT POLE BASE	79.15

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_SITE-PREP.DWG

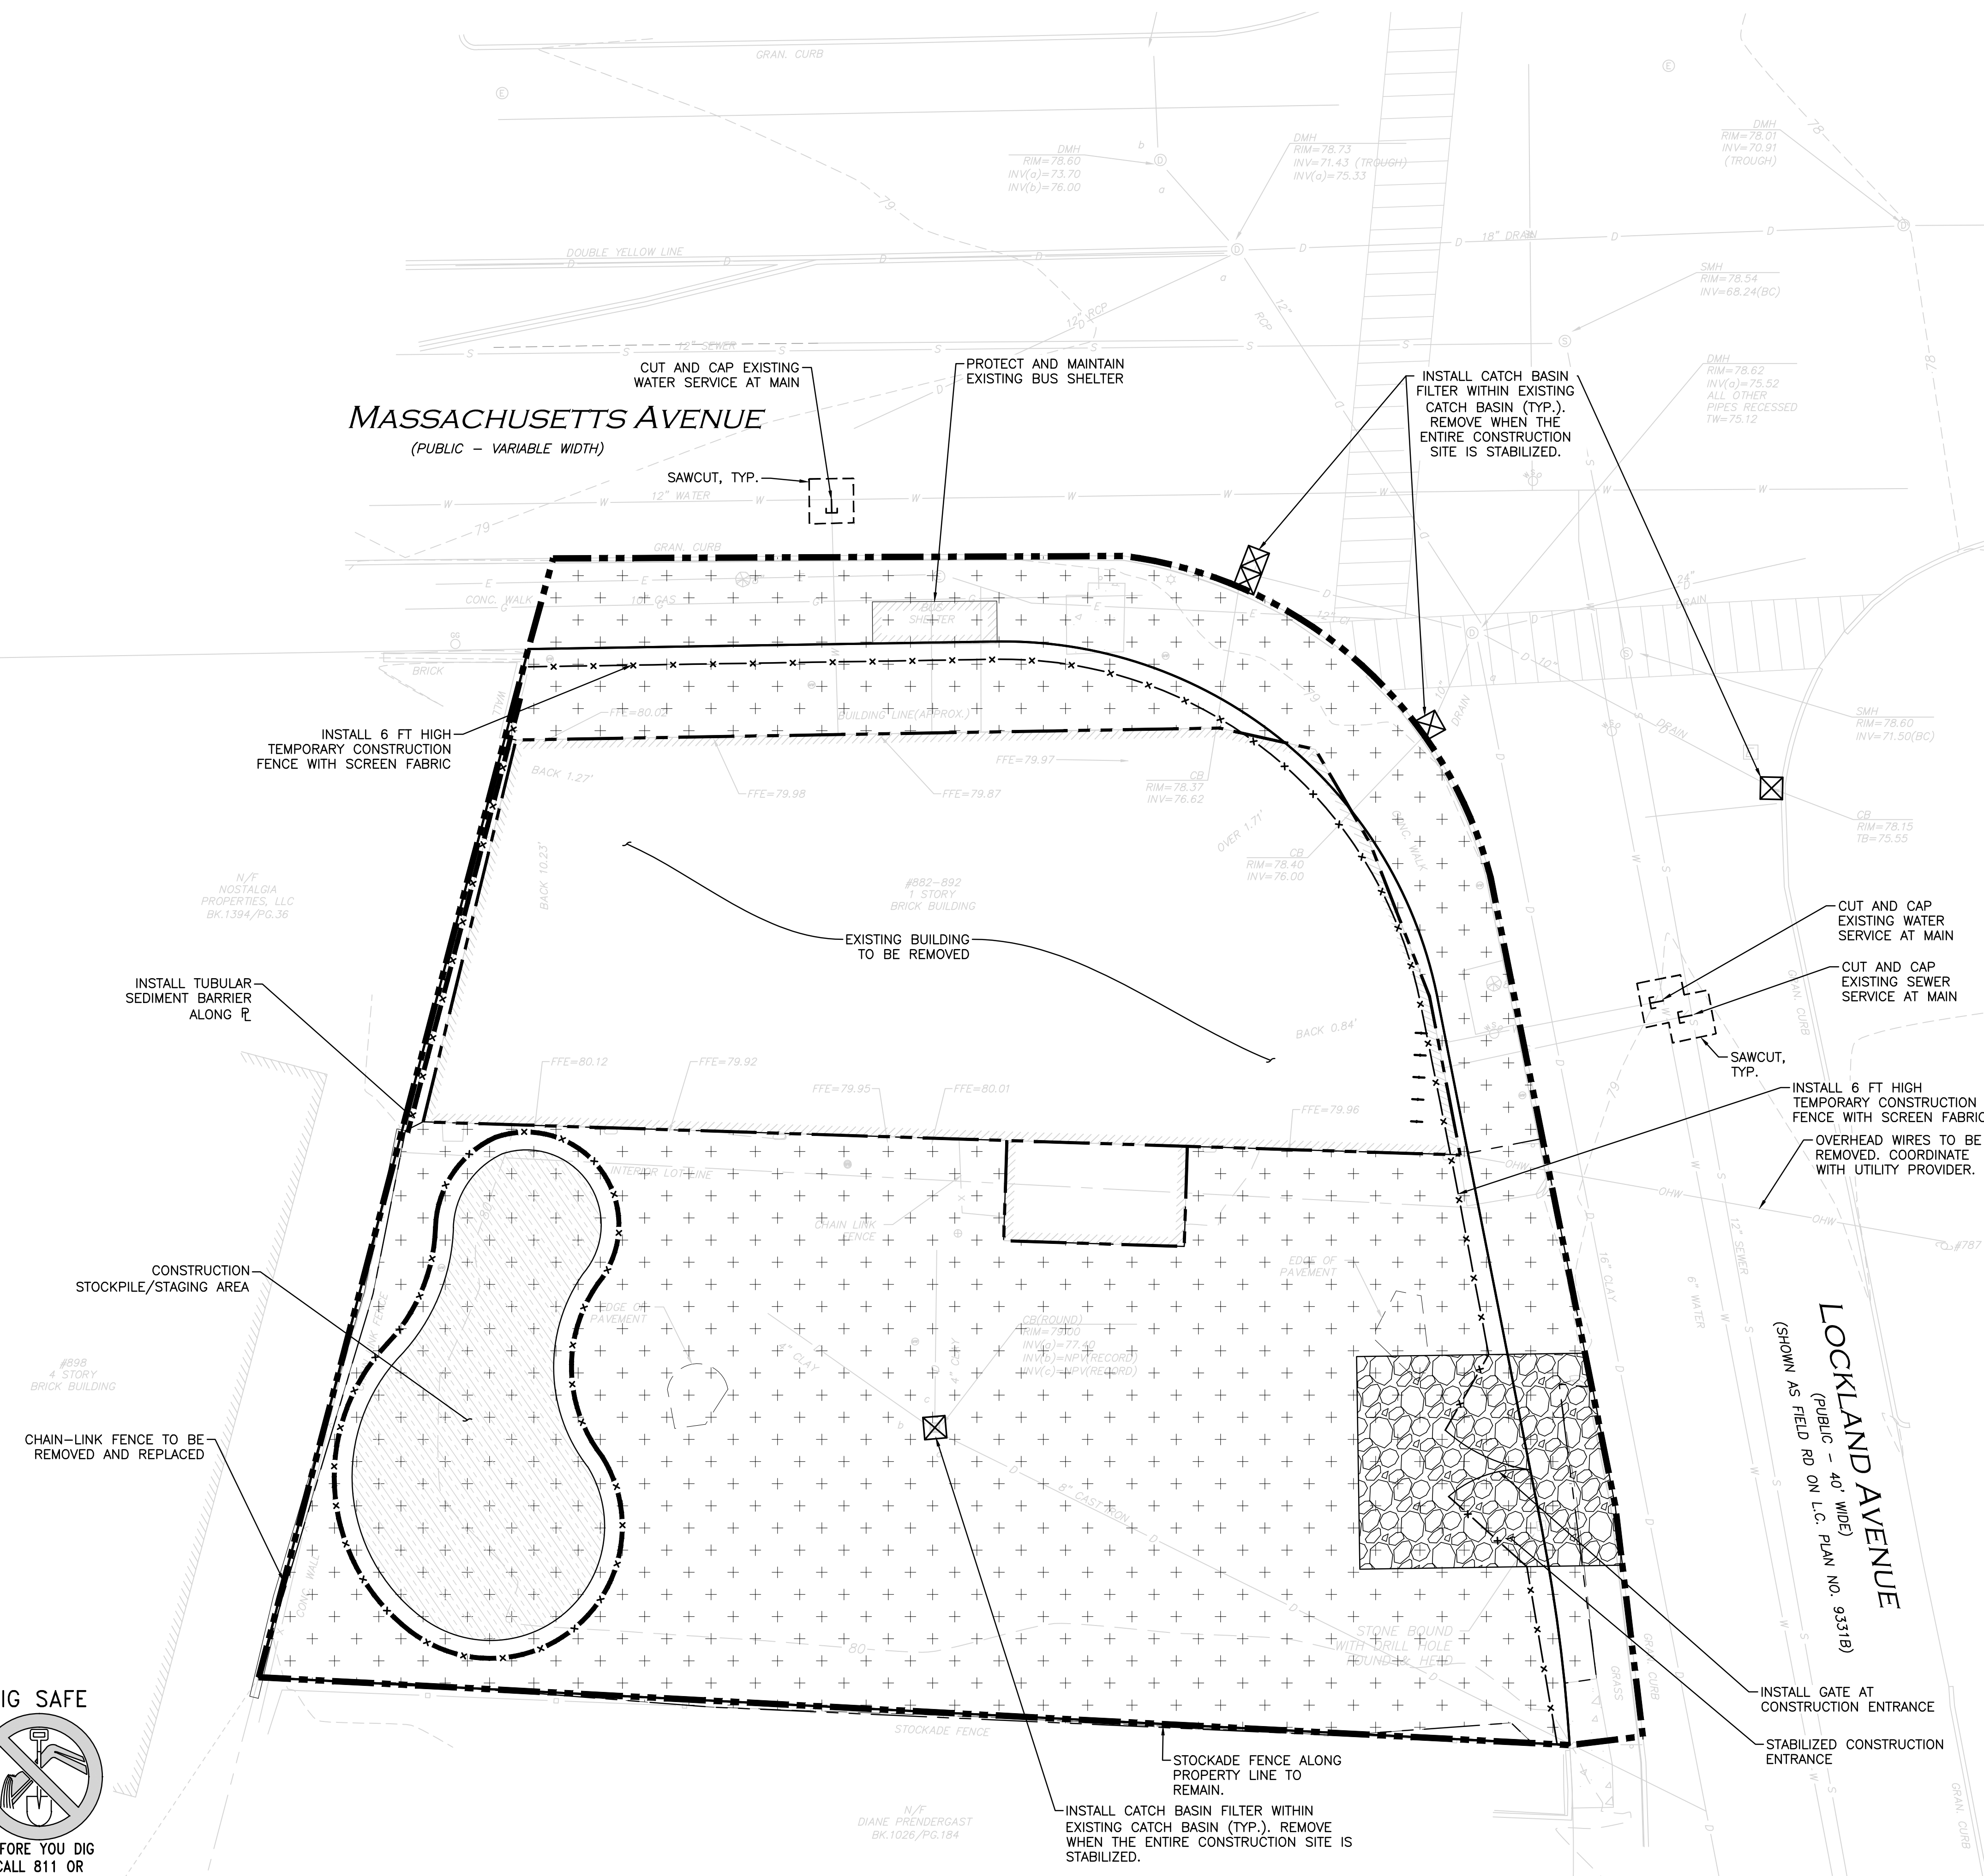

LEGEND	
TUBULAR BARRIER	— x — x —
CATCH BASIN FILTER	⊠
STABILIZED ENTRANCE	▨
STOCKPILE/STAGING AREA	▨
LIMIT OF DISTURBANCE	— · — · —
LIMIT OF 'CLEAR AND GRUB'	— · — · —
BUILDING TO BE REMOVED	▨
PAVEMENT TO BE REMOVED	▨
UTILITY CUT AND CAP	E
TEMPORARY FENCE	— x — x —

SITE PREPARATION NOTES:

- THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION.
- THE CONTRACTOR MUST CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY, AND "DIGSAFE" AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION WORK TO REQUEST EXACT FIELD LOCATION OF UTILITIES AND THE ENGINEER SHALL BE NOTIFIED IN WRITING OF ANY UTILITIES INTERFERING WITH THE PROPOSED CONSTRUCTION AND APPROPRIATE REMEDIAL ACTION TAKEN BEFORE PROCEEDING WITH THE WORK. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
- ALTHOUGH CERTAIN ITEMS HAVE BEEN NOTED ON THIS DRAWING FOR DEMOLITION, NO ATTEMPT HAS BEEN MADE TO DELINEATE EACH AND EVERY ITEM THAT REQUIRES DEMOLITION FOR THE COMPLETION OF THE PROJECT. THE CONTRACTOR WILL BE RESPONSIBLE FOR ALL NECESSARY DEMOLITION WORK TO COMPLETE THE PROJECT. ALLEN & MAJOR ASSOCIATES, INC. IS NOT RESPONSIBLE FOR SITE DEMOLITION ITEMS NOT SHOWN ON THE SURVEY, OR SPECIFICALLY NOTED. THE DEMOLITION NOTES AND ARROWS ON THIS PLAN ARE TYPICAL AND DO NOT REFLECT QUANTITY.
- EXISTING WATER AND SEWER CONNECTIONS SHALL BE CUT AND CAPPED IN ACCORDANCE WITH THE TOWN OF ARLINGTON REQUIREMENTS.
- THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.
- ALL INSTALLED CATCH BASINS AND AREA DRAINS SHALL HAVE A FILTER INSTALLED IMMEDIATELY, AND THE FILTER SHALL BE REMOVED WHEN THE ENTIRE SITE IS STABILIZED.



PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

REV	DATE	DESCRIPTION
2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB

APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C272901
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
SITE PREPARATION PLAN	C-101

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_LAYOUT & MATERIALS.DWG



MASSACHUSETTS AVENUE

(PUBLIC - VARIABLE WIDTH)

ZONING SUMMARY TABLE			
B2-NEIGHBORHOOD BUSINESS (MIXED-USE <=20,000SF)			
ITEM	REQUIRED/ ALLOWED	EXISTING	PROPOSED
MINIMUM LOT AREA	----	14,380± SF	14,380± SF
MINIMUM LOT AREA PER UNIT	----	N/A	654± SF
MINIMUM FRONTAGE	50 FT	208± FT	208± FT
MINIMUM FRONT YARD SETBACK	----	0 FT	2.7 FT
MINIMUM SIDE YARD SETBACK	----	1.3 FT	3.4 FT
MINIMUM REAR YARD SETBACK	20.3 FT	53.6 FT	63.0 FT
LANDSCAPED OPEN SPACE	10%	5.3%	20.1%
USABLE OPEN SPACE	20%	0.0%	0.4%(2)
MAXIMUM HEIGHT	50 FT	13.5± FT	>50
MAXIMUM HEIGHT STORIES	4(1)	1	4
FLOOR AREA RATIO	1.50	0.35	1.23

ZONING TABLE NOTES:

- SECTION 5.3.17, FOR BUILDING MORE THAN 3 STORIES IN HEIGHT, AN ADDITIONAL 7.5 FT STEP-BACK SHALL BE PROVIDED BEGINNING AT THE THIRD STORY LEVEL OR 30 FT ABOVE GRADE, WHICHEVER IS LESS. THE UPPER STORY STEP-BACK SHALL BE PROVIDED ALONG ALL BUILDING ELEVATIONS WITH STREET FRONTAGE.
- SECTION 5.3.21. SUPPLEMENTAL REQUIREMENTS IN THE BUSINESS AND INDUSTRIAL DISTRICTS, D. FOR MIXED USES AND ANY PERMITTED RESIDENTIAL USE NOT SPECIFICALLY IDENTIFIED IN THE TABLES IN SECTION 5.5.2, THE MINIMUM OPEN SPACE REQUIREMENTS (COMPUTED FROM THE RESIDENTIAL FLOOR AREA ONLY) SHALL BE 10% LANDSCAPED AND 20% USABLE IN THE B1, B2, B2A, B3, AND B4 DISTRICTS, AND 15 PERCENT USABLE IN THE B5 DISTRICT. A WAIVER MAY BE REQUIRED FROM THE USABLE OPEN SPACE REQUIREMENT.

PARKING SUMMARY TABLE

USE	CALCULATION	MIN. REQUIRED	TOTAL PROPOSED
APARTMENT BUILDING	1.15 SPACES PER 1 BED UNIT	21	21
	18 X 1.15 = 21 REQUIRED		
OFFICE BUSINESS OR PROFESSIONAL	1 SPACE PER EFFICIENCY UNIT	4	4
	4 X 1 = 4 REQUIRED		
	1 PER 500 SF	N/A	N/A
	1,300 SF (UNDER 3,000 SF PARKING N/A)		
		25	25

ADA SPACES REQUIRED:

(15-25) TOTAL PARKING SPACES PROVIDED, 1 SHALL BE THE MINIMUM ADA PARKING PROVIDED, 1 SPACES BEING VAN ACCESSIBLE.

PROVIDED 1 SPACES, 1 BEING VAN ACCESSIBLE.

PARKING TABLE NOTES:

- SECTION 6.1.10, C. FOR A MIXED-USE DEVELOPMENT THE FIRST 3,000 SF OF NON-RESIDENTIAL SPACE IS EXEMPT FROM THE PARKING REQUIREMENTS OF THIS SECTION 6.1.
- SECTION 6.1.11, STANDARD PARKING STALLS SHALL BE 8'X16', AND COMPACT SPACES SHALL BE 8'X16'(UP TO 20% ALLOWED WITH S.P.). DRIVE AISLE WIDTH SHALL BE 24' FOR TWO-WAY TRAFFIC.

LEGEND

PROP. PROPERTY LINE	---
SIGN	+
BOLLARD	•
BUILDING	[Hatched Box]
BUILDING ARCHITECTURE	[Hatched Box]
BUILDING INTERIOR WALLS	[Hatched Box]
CURB	---
PARKING STRIPING	[Hatched Box]
ROADWAY STRIPING	[Hatched Box]
SIDEWALK	[Hatched Box]
ADA ACCESSIBLE RAMP	[Hatched Box]
ADA DET. WARNING SURFACE	[Hatched Box]
SNOW STORAGE	[Hatched Box]
SAW-CUT LINE	---
PARKING COUNT	10
VINYL FENCE	---

NOTES

- WRITTEN DIMENSIONS ON THIS PLAN TAKE PRECEDENCE OVER SCALED DIMENSIONS. THE CONTRACTOR SHALL USE CAUTION WHEN SCALING REPRODUCED PLANS. IN THE EVENT OF A CONFLICT BETWEEN THIS PLAN SET AND ANY OTHER DRAWINGS AND/OR SPECIFICATIONS OR CONDITIONS, THE ENGINEER SHALL BE NOTIFIED BY THE CONTRACTOR. ALL SITE ITEMS SHALL BE LAID OUT AND AS BUILT BY A LICENSED LAND SURVEYOR.
- THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.



PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C2729-01
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CLIENTS REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.


DRAWING TITLE:	SHEET No.
LAYOUT & MATERIALS PLAN	C-102

Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_GRADING & DRAINAGE.DWG



MASSACHUSETTS AVENUE (PUBLIC - VARIABLE WIDTH)

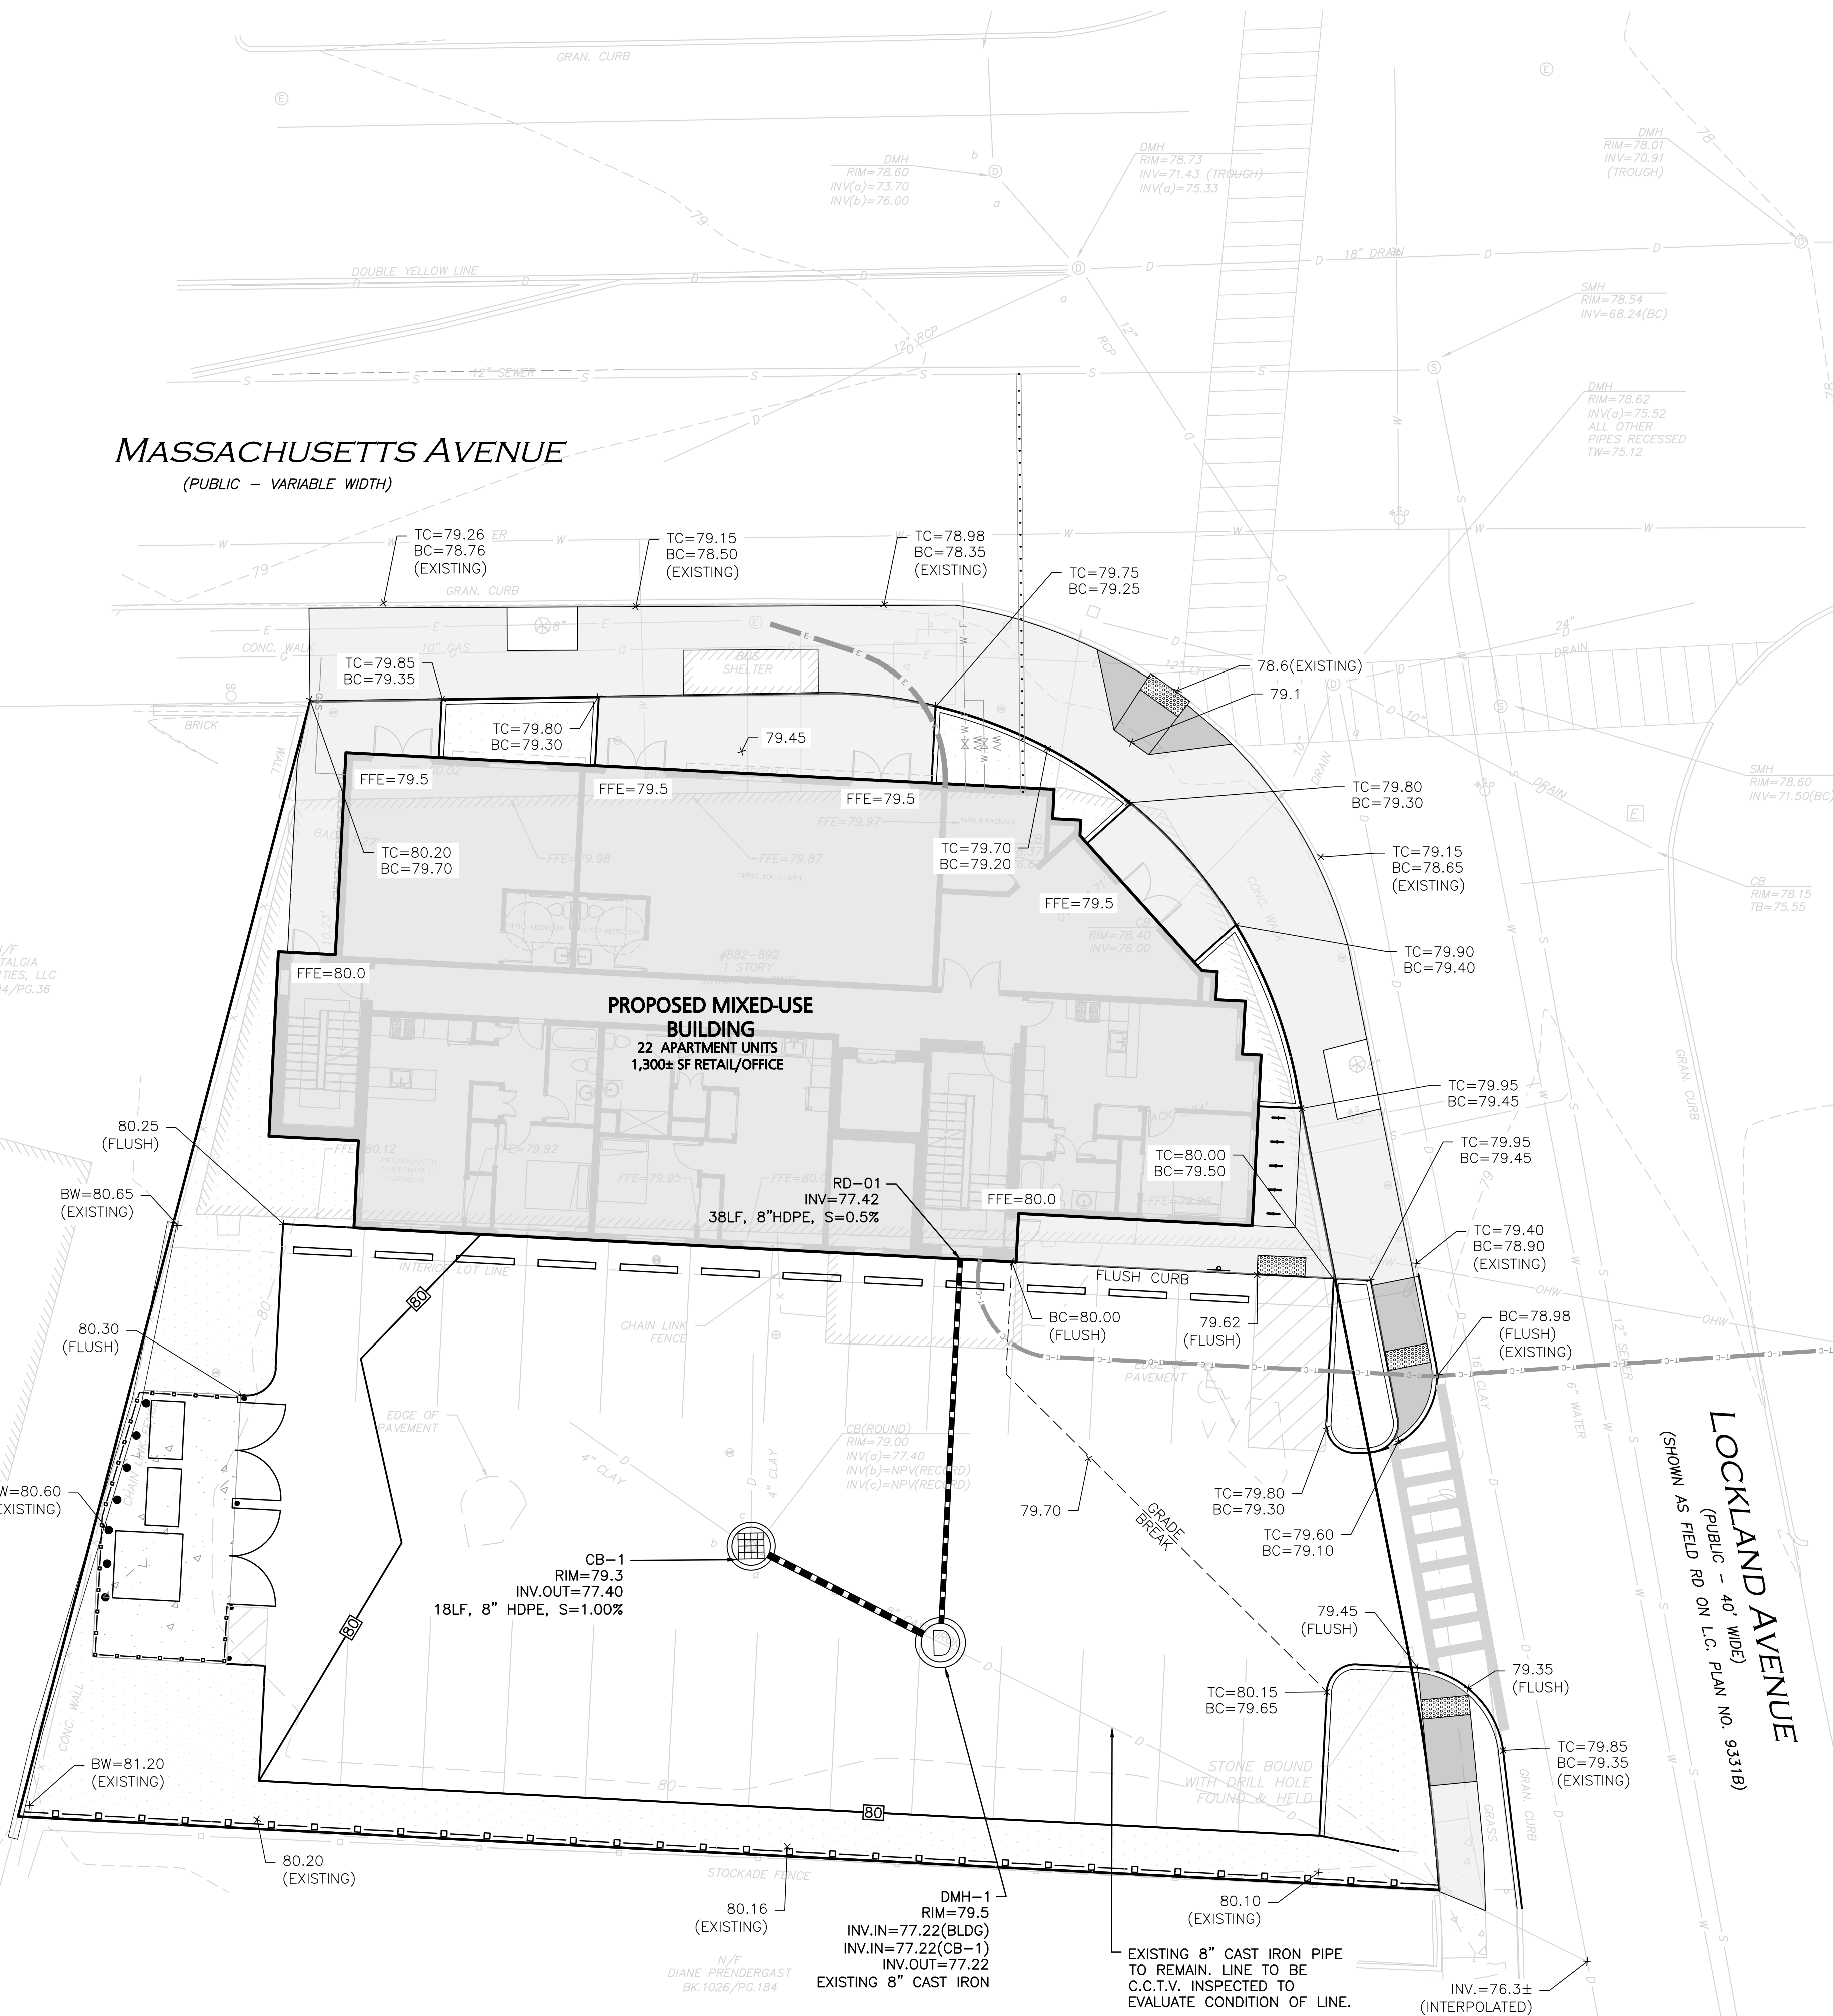


LEGEND

DRAIN MANHOLE	
CATCH BASIN	
DRAIN LINE	
10' CONTOUR	
2' CONTOUR	
SPOT GRADE	

PLAN NOTES:

- THE LOCATIONS OF EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK, AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.
- CONTRACTOR IS RESPONSIBLE FOR DEMOLITION OF EXISTING STRUCTURES INCLUDING REMOVAL OF ANY EXISTING UTILITIES SERVING THE STRUCTURE. UTILITY CONNECTIONS SHOULD BE COORDINATED WITH THE MEP PRIOR TO CONSTRUCTION.
- EXISTING DRAINAGE STRUCTURES TO REMAIN ARE TO BE INSPECTED AND REPAIRED AS NEEDED, AND EXISTING PIPES TO BE CLEANED OUT TO REMOVE ALL SILT AND DEBRIS.
- IF ANY EXISTING STRUCTURES TO REMAIN ARE DAMAGED DURING CONSTRUCTION IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO REPAIR AND/OR REPLACE THE EXISTING STRUCTURE AS NECESSARY TO RETURN IT TO EXISTING CONDITIONS OR BETTER.
- CONTRACTOR SHALL ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY TO ENSURE A SMOOTH FIT AND CONTINUOUS GRADE.
- CONTRACTOR SHALL ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS FOR ALL NATURAL AND PAVED AREAS.
- THE CONTRACTOR SHALL COORDINATE WITH THE ARCHITECT FOR THE FINAL LOCATIONS OF PROPOSED ROOF DRAINS. LOCATIONS ARE SHOWN HEREON FOR COORDINATION PURPOSES ONLY.
- WRITTEN DIMENSIONS ON THIS PLAN TAKE PRECEDENCE OVER SCALED DIMENSIONS. THE CONTRACTOR SHALL USE CAUTION WHEN SCALING REPRODUCED PLANS. IN THE EVENT OF A CONFLICT BETWEEN THIS PLAN SET AND ANY OTHER DRAWINGS AND/OR SPECIFICATIONS OR CONDITIONS, THE ENGINEER SHALL BE NOTIFIED BY THE CONTRACTOR.
- ANY DAMAGE TO PRIVATE OR PUBLIC PROPERTIES DUE TO THE CONTRACTOR'S ACTIVITIES SHALL BE REPAIRED AND RESTORED BY THE CONTRACTOR AT THEIR OWN EXPENSE.
- ALL PROPERTY MARKERS AND STREET LINE MONUMENTS SHALL BE PROPERLY PROTECTED DURING CONSTRUCTION. ANY DAMAGE TO THESE ITEMS SHALL BE REPAIRED AND RESTORED BY A LAND SURVEYOR LICENSED IN THE COMMONWEALTH OF MASSACHUSETTS AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ADDITIONAL BENCHMARK INFORMATION IF REQUIRED. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING AND PROTECTING ALL EXISTING BENCHMARKS. IF IT IS NECESSARY TO RELOCATE A BENCHMARK, IT SHALL BE RELOCATED BY A MASSACHUSETTS LAND SURVEYOR AND DONE SO AT THE CONTRACTOR'S EXPENSE.
- ALL PERMITS AND APPROVALS NECESSARY FROM AGENCIES GOVERNING THE WORK SHALL BE OBTAINED BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF WORK.
- CONSTRUCTION DURING WET WEATHER OR WINTER CONDITIONS IS TO BE ANTICIPATED AND PROVISIONS TO ADEQUATELY ADDRESS THESE CONDITIONS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- ALL CONSTRUCTION SHALL CONFORM TO THE APPLICABLE REGULATIONS AND STANDARDS INCLUDING THE TOWN OF ARLINGTON, MADOT, MADEP, MWRA, MUTCD, AND AASHTO.
- THE CONTRACTOR IS SOLELY RESPONSIBLE FOR THE MEANS AND METHODS OF CONSTRUCTION AND FOR CONDITIONS AT THE SITE. THESE PLANS, PREPARED BY ALLEN & MAJOR ASSOCIATES DO NOT EXTEND TO OR INCLUDE SYSTEMS PERTAINING TO THE SAFETY OF THE CONSTRUCTION CONTRACTOR OR THEIR EMPLOYEES, AGENTS OR REPRESENTATIVES IN THE PERFORMANCE OF THE WORK, OR THE OWNER'S EMPLOYEES, CUSTOMERS, OR THE GENERAL PUBLIC. THE SEAL OF THE ENGINEER AS INCLUDED IN THE PLAN SET DOES NOT EXTEND TO ANY SUCH SAFETY SYSTEMS THAT MAY NOW OR HEREAFTER BE INCORPORATED INTO THESE PLANS. THE CONSTRUCTION CONTRACTOR SHALL PROVIDE THE APPROPRIATE SAFETY SYSTEMS WHICH MAY BE REQUIRED BY THE U.S. OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA), STATE, AND LOCAL REGULATIONS.
- THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.

GRAPHIC SCALE

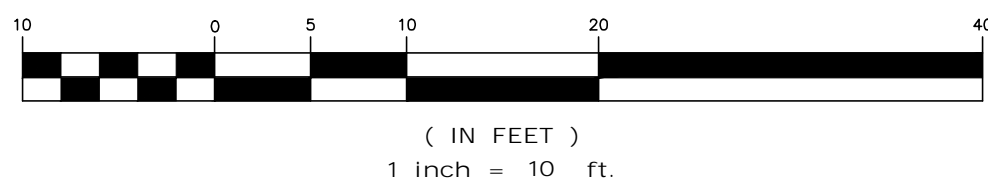

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C272901
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896


WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
GRADING & DRAINAGE PLAN	C-103

Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved


R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_UTILITIES.DWG

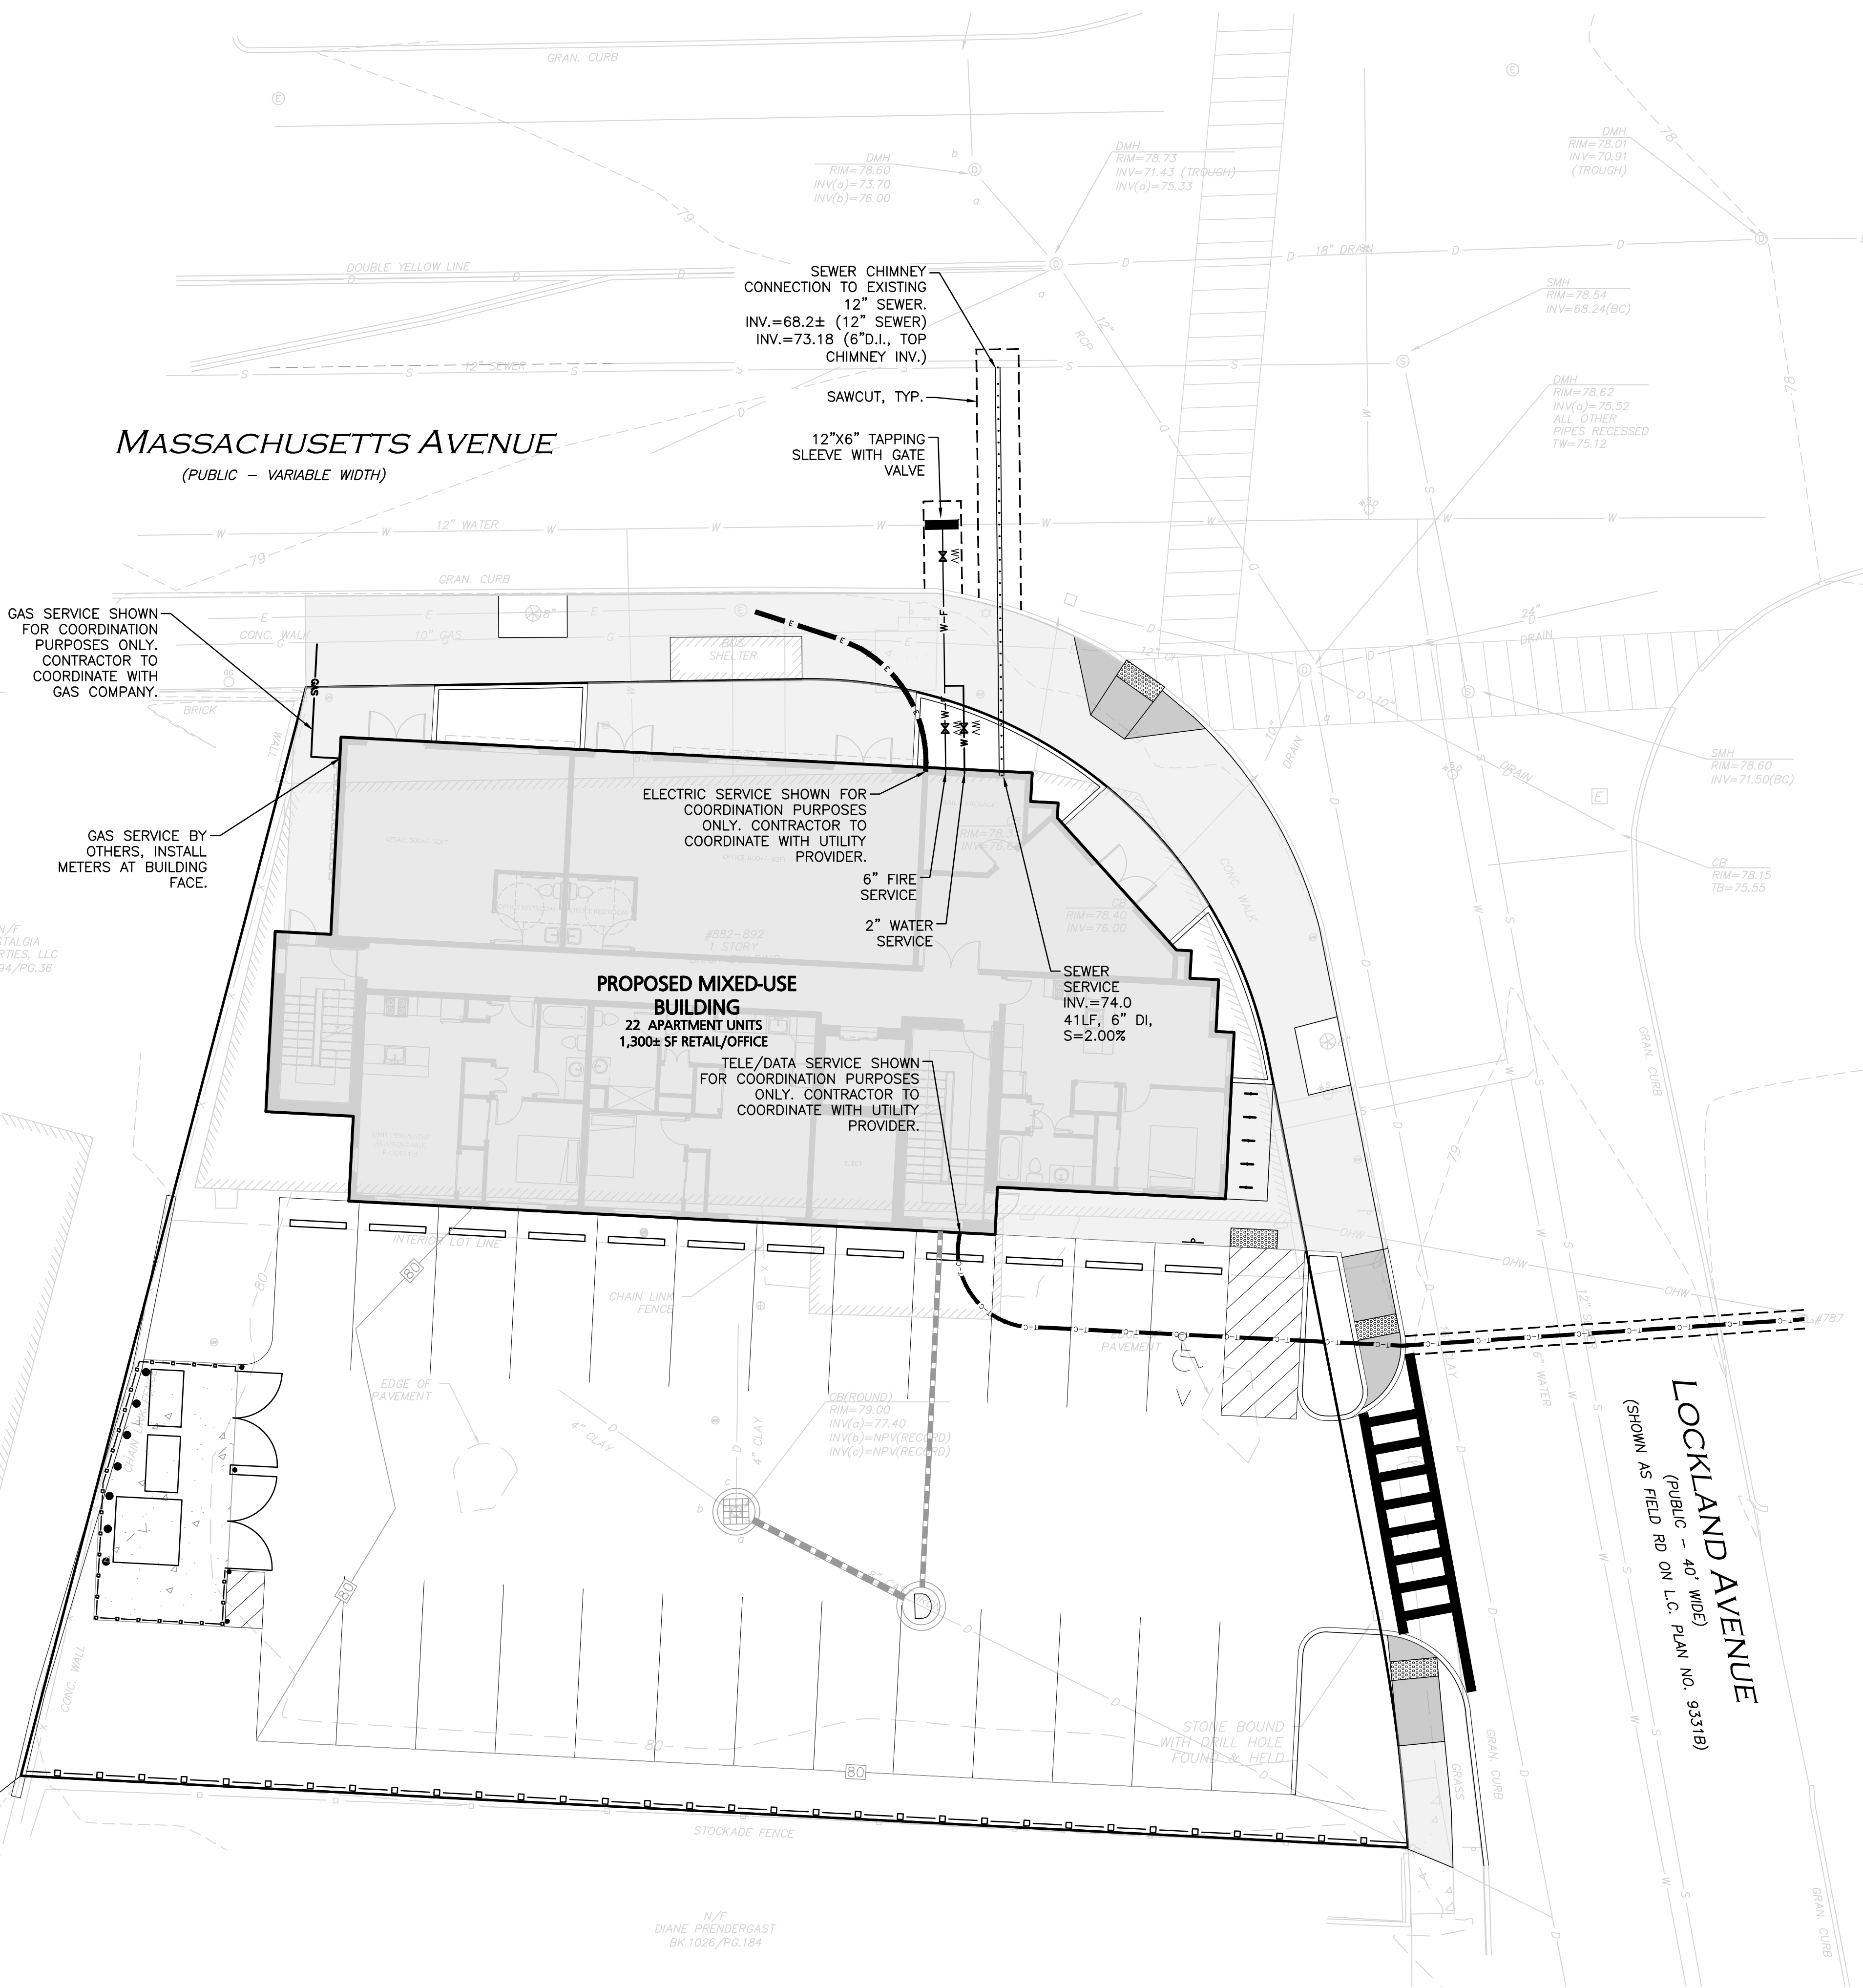

LEGEND	
SEWER MANHOLE	⊙
SEWER CLEANOUT	⊙
SEWER VENT	⊙
SEWER LINE	—
WATER LINE	—W—
WATER (FIRE SERVICE)	—W-F—
WATER (DOMESTIC SERVICE)	—W-D—
WATER VALVE	WV
GAS LINE	—GAS—
GAS VALVE	GV
ELECTRICAL CONDUIT	—E—
TELE/CABLE CONDUIT	—T-C—

UTILITY NOTES:

1. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION.
2. A MINIMUM OF 18" VERTICAL CLEARANCE SHALL BE MAINTAINED WHERE WATER SERVICES CROSS STORM DRAIN AND SEWER LINES. WATER SERVICES SHALL BE ENCASED IN CONCRETE REGARDLESS OF CLEARANCE WHEN PASSING BELOW STORM DRAIN AND SEWER LINES. ENCASEMENT SHALL EXTEND ALONG WATER SERVICE A MINIMUM DISTANCE OF EIGHT FEET CENTERED ON THE CROSSING POINT OF THE OTHER PIPE AS MEASURED NORMALLY FROM ALL POINTS ALONG THE PIPE.
3. THE ENGINEER SHALL BE NOTIFIED IN WRITING OF ANY UTILITIES INTERFERING WITH THE PROPOSED CONSTRUCTION AND APPROPRIATE REMEDIAL ACTION TAKEN BEFORE PROCEEDING WITH THE WORK. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
4. THE CONTRACTOR MUST CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY, AND "DIGSAFE" AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION WORK TO REQUEST EXACT FIELD LOCATION OF UTILITIES AND THE ENGINEER SHALL BE NOTIFIED IN WRITING OF ANY UTILITIES INTERFERING WITH THE PROPOSED CONSTRUCTION AND APPROPRIATE REMEDIAL ACTION TAKEN BEFORE PROCEEDING WITH THE WORK. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
5. THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.

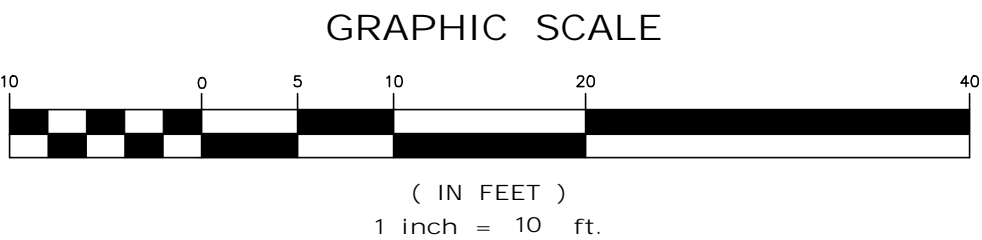

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C2729-01
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896


WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
UTILITIES PLAN	C-104

Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CURRENT\C-2729-01_DETAILS.DWG

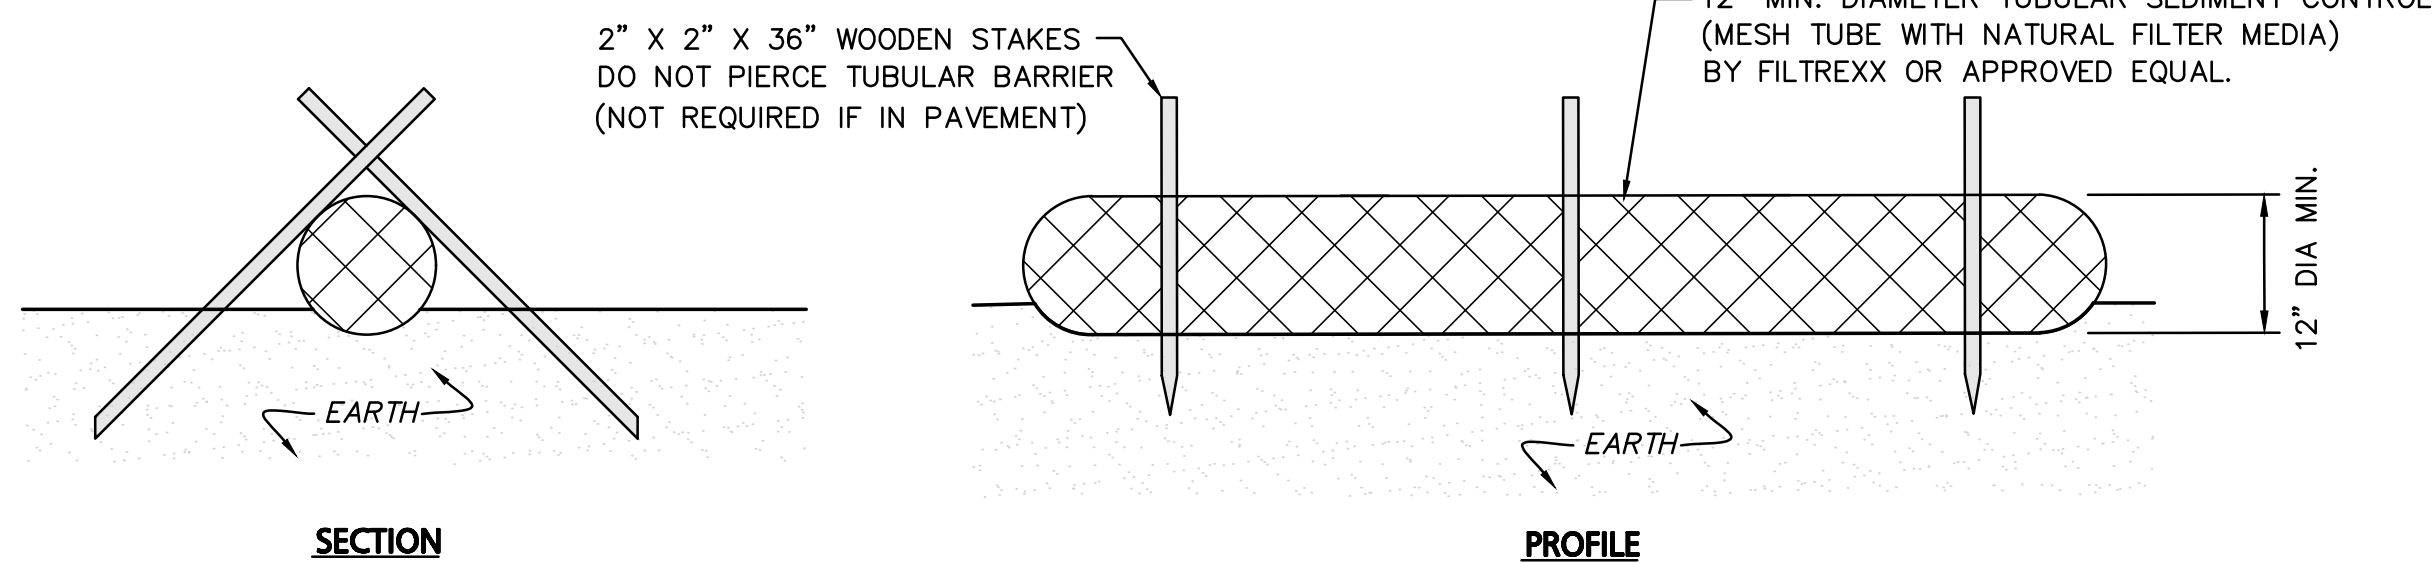


SECTION

PROFILE


NOTES:

1. ALL MATERIALS TO MEET MANUFACTURERS SPECIFICATIONS.
2. INSTALL WOODEN STAKES IN A CRISS-CROSS PATTERN EVERY 8' ON CENTER.
3. OVERLAP TUBULAR BARRIER SEGMENTS A MINIMUM OF 12".
4. THE CONTRACTOR SHALL MAINTAIN THE TUBULAR BARRIERS IN A FUNCTIONAL CONDITION AT ALL TIMES. THE CONTROLS SHALL BE ROUTINELY INSPECTED BY THE CONTRACTOR.
5. WHERE THE TUBULAR BARRIERS REQUIRE REPAIR OR SEDIMENT REMOVAL, IT WILL BE COMPLETED BY THE CONTRACTOR AT NO ADDITIONAL COST.
6. AT A MINIMUM, THE CONTRACTOR SHALL REMOVE SEDIMENTS COLLECTED AT THE BASE WHEN THEY REACH 1/3 THE EXPOSED HEIGHT OF THE BARRIER.

TUBULAR SEDIMENT BARRIER
NOT TO SCALE

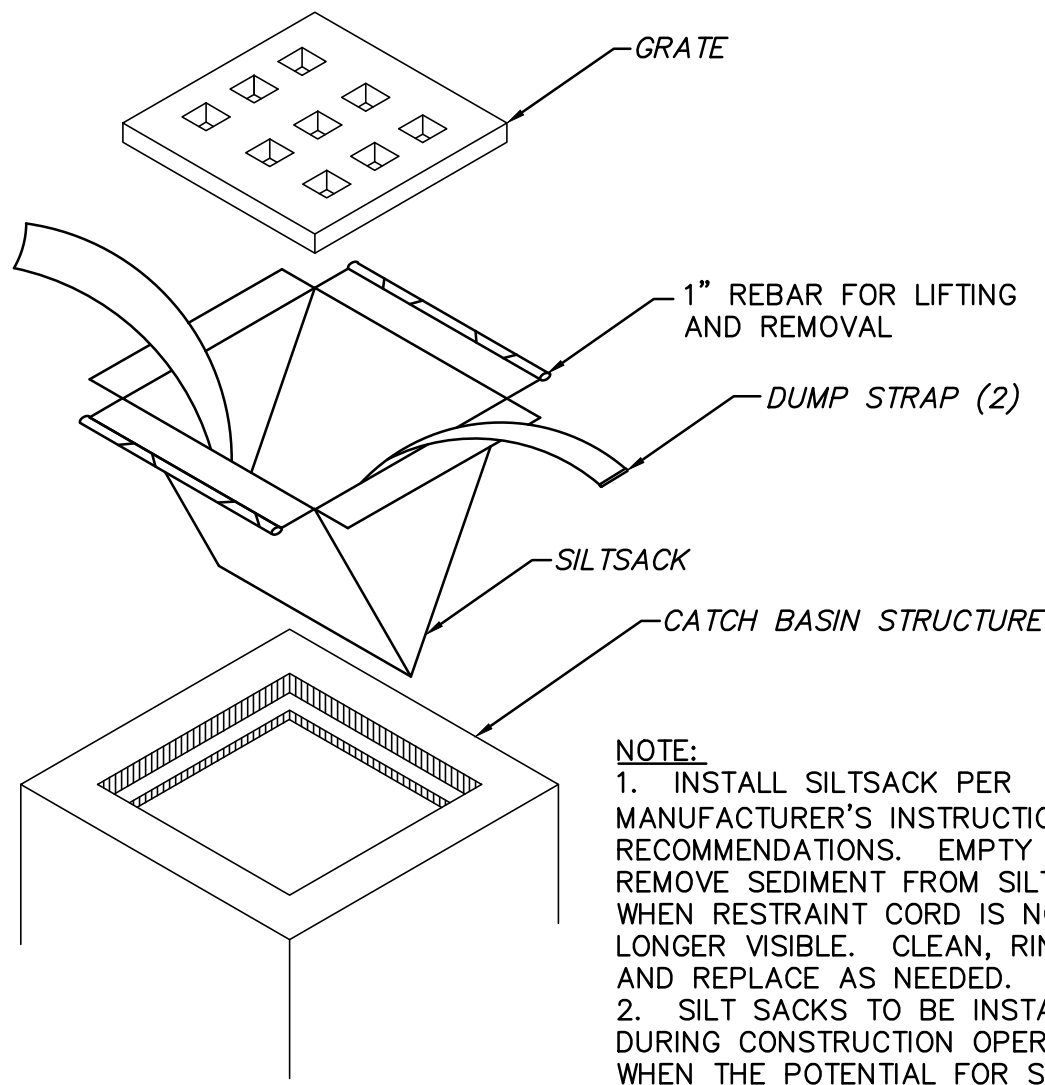


SILTSACK INLET DETAIL
NOT TO SCALE

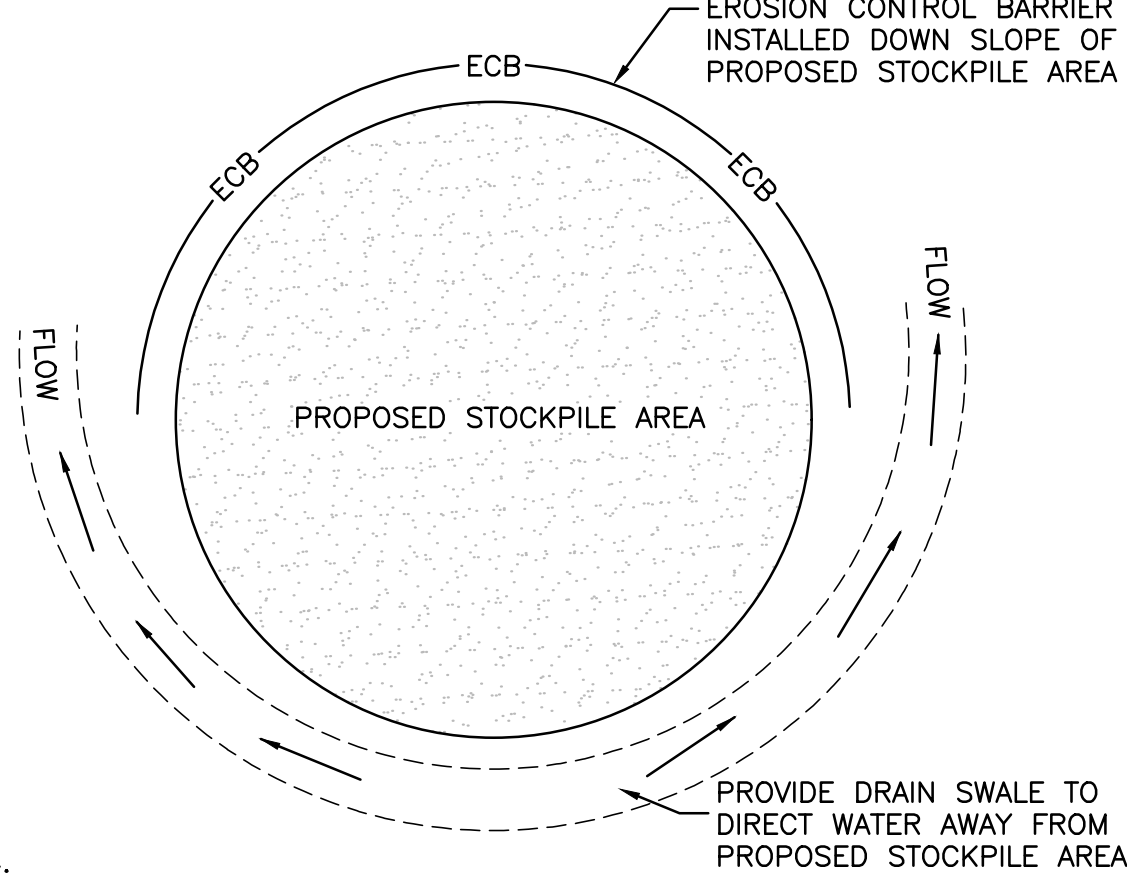


- NOTES:
1. SOIL AND FILL STOCKPILES EXPECTED TO REMAIN IN PLACE FOR LESS THAN 90 DAYS SHALL BE COVERED WITH STRAW AND MULCH (AT 100LBS/1,000 SF), OR WITH AN ANCHORED TARP WITHIN 7 DAYS OR PRIOR TO ANY RAINFALL.
 2. SOIL AND FILL STOCKPILES EXPECTED TO REMAIN IN PLACE FOR 90 DAYS OR MORE SHALL BE SEEDDED WITH WINTER RYE (FOR FALL SEEDING AT 1LB/1,000 SF) OR OATS (FOR SUMMER SEEDING AT 2LB/1,000 SF) AND THEN COVERED WITH STRAW MULCH (AT 100LB/1,000 SF) OR AN ANCHORED TARP WITHIN 7 DAYS OR PRIOR TO ANY RAINFALL.

STOCKPILE PROTECTION DETAIL
NOT TO SCALE

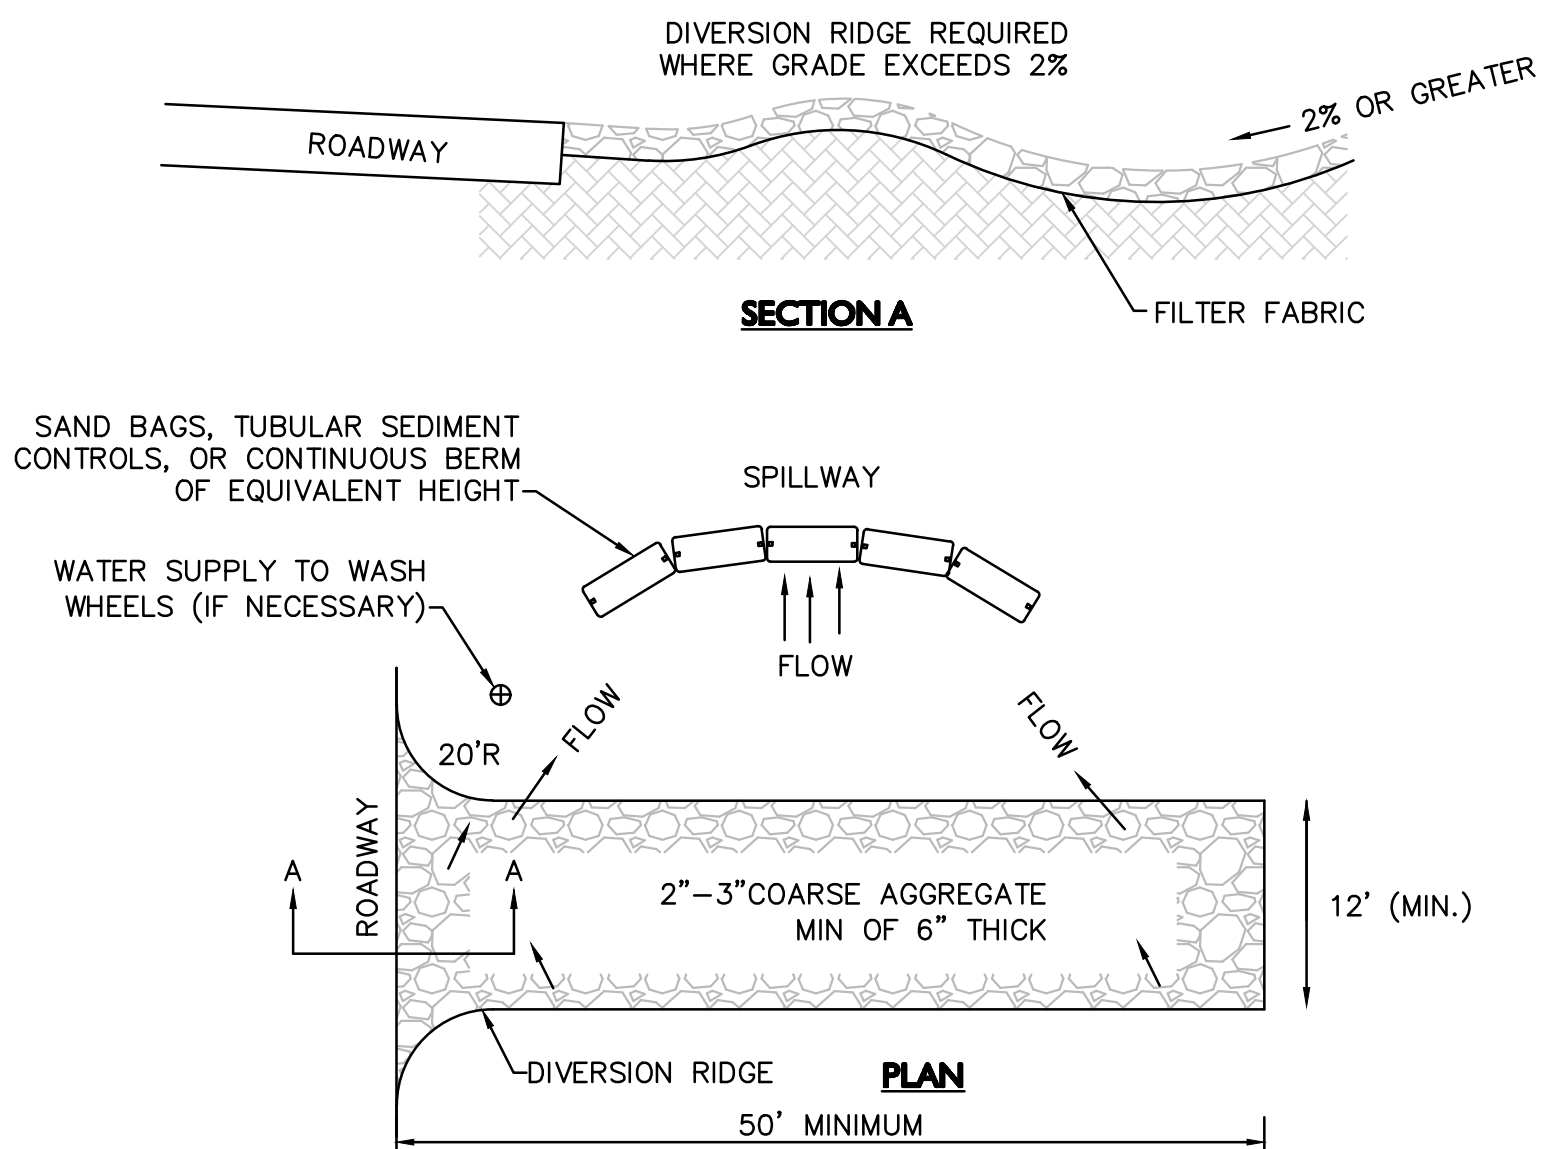


- NOTES:
1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.
 2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTERING THE PUBLIC RIGHT-OF-WAY.
 3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.
 4. USE SANDBAGS, TUBULAR SEDIMENT CONTROLS, OR OTHER APPROVED METHODS TO CHANNELIZE RUNOFF TO BASIN AS REQUIRED.

TEMPORARY CONSTRUCTION ENTRANCE/EXIT
NOT TO SCALE

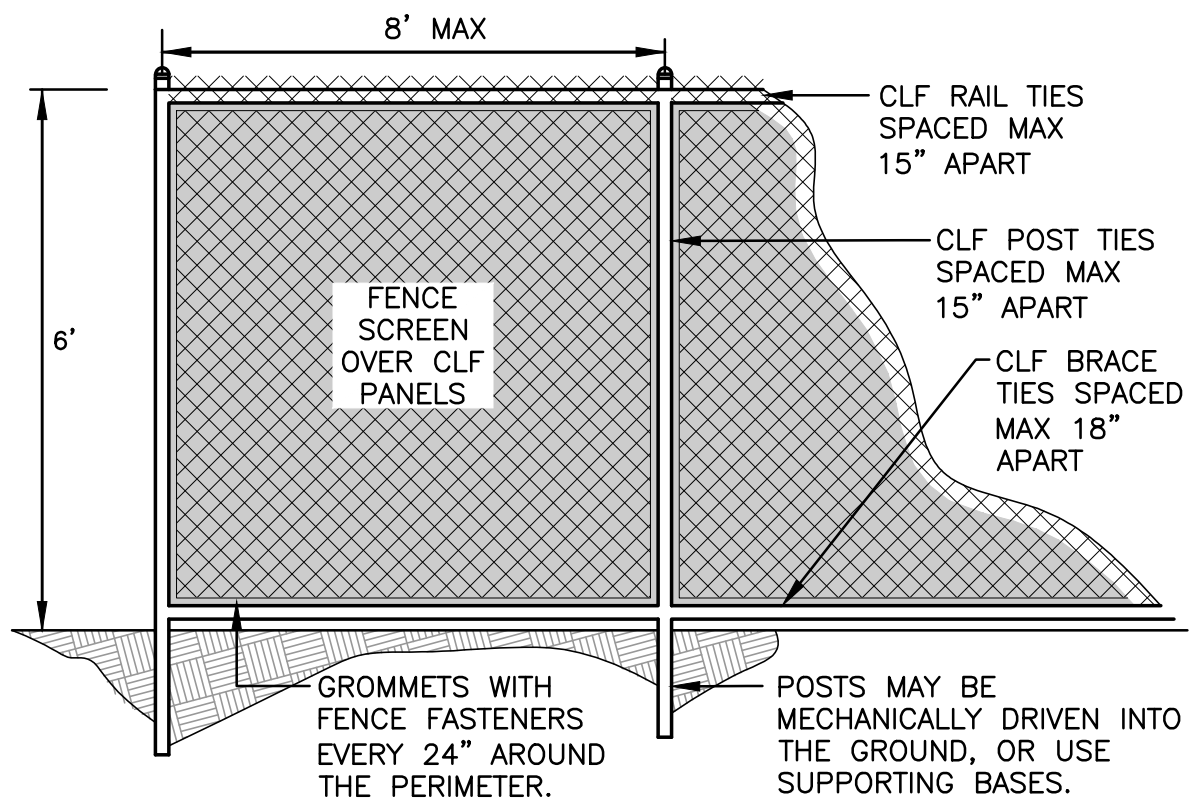


- NOTES:
1. SCREEN MATERIAL SHALL BE MADE FROM KNITTED HIGH DENSITY POLYETHYLENE WITH UV ADDITIVES.
 2. SCREEN FILAMENT STRENGTH SHALL BE A MINIMUM OF 50LBS/FT.
 3. SCREEN MATERIAL BREAK STRENGTH SHALL BE A MINIMUM OF 500 LBS/FT.
 4. SCREEN SHADE / WIND BLOCKAGE SHALL BE A MINIMUM OF 85%.
 5. SCREEN COLOR SHALL BE GREEN OR BLACK.

TEMPORARY CONSTRUCTION FENCE w/ SCREEN
NOT TO SCALE

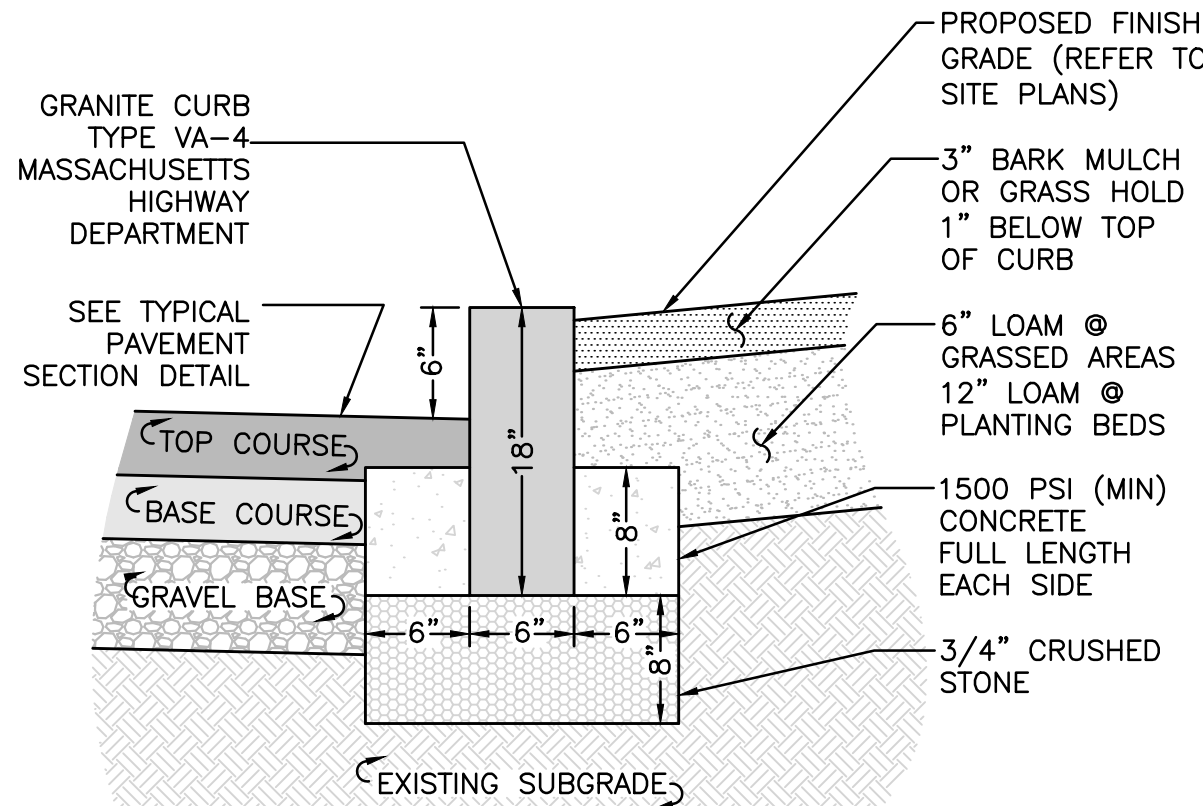


VERTICAL GRANITE CURB
NOT TO SCALE

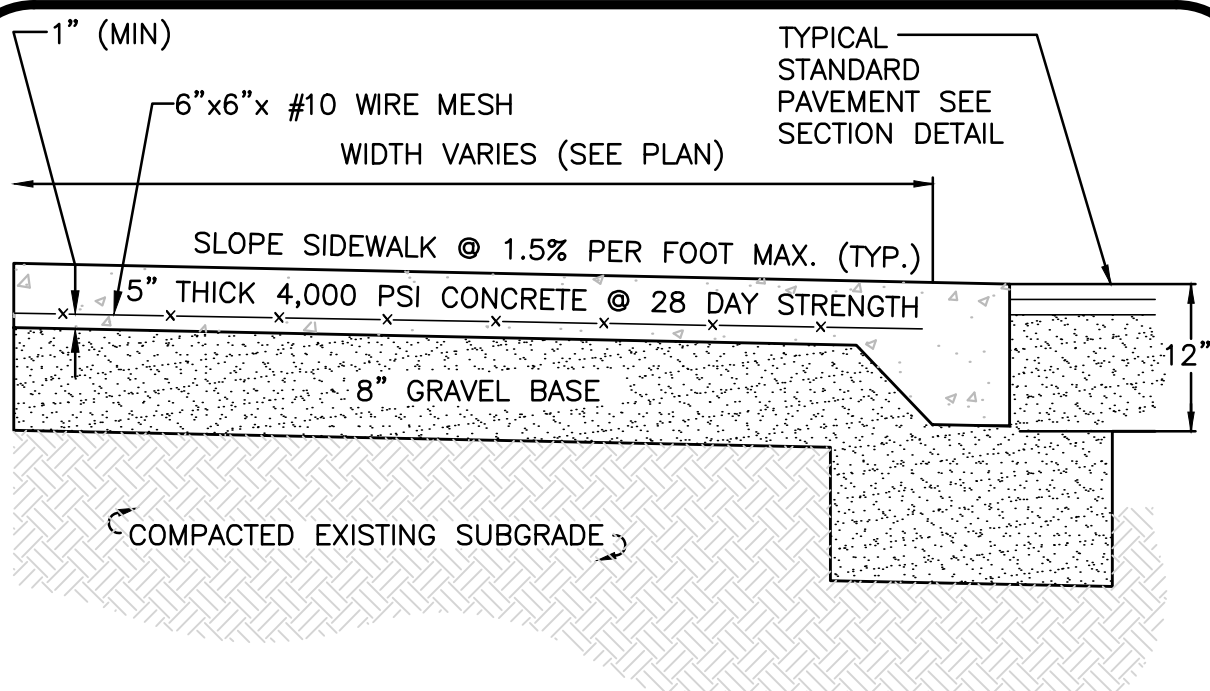


- NOTES:
1. SIDEWALK TO HAVE TOOLED JOINTS IN A 5' x 5' (TYP.) GRID WITH EXPANSION JOINTS 15' ON CENTER WITH PREMOLDED FILLER.
 2. SEE PLAN FOR ELEVATIONS
 3. SIDEWALK CROSS SLOPE TO BE 1.5% MAX & SIDEWALK LONGITUDINAL RUNNING SLOPE TO BE 4.5% MAX, TYP.
 4. APPLY BRUSH MARKS PERPENDICULAR TO TRAVEL PATH.

CONCRETE SIDEWALK
NOT TO SCALE

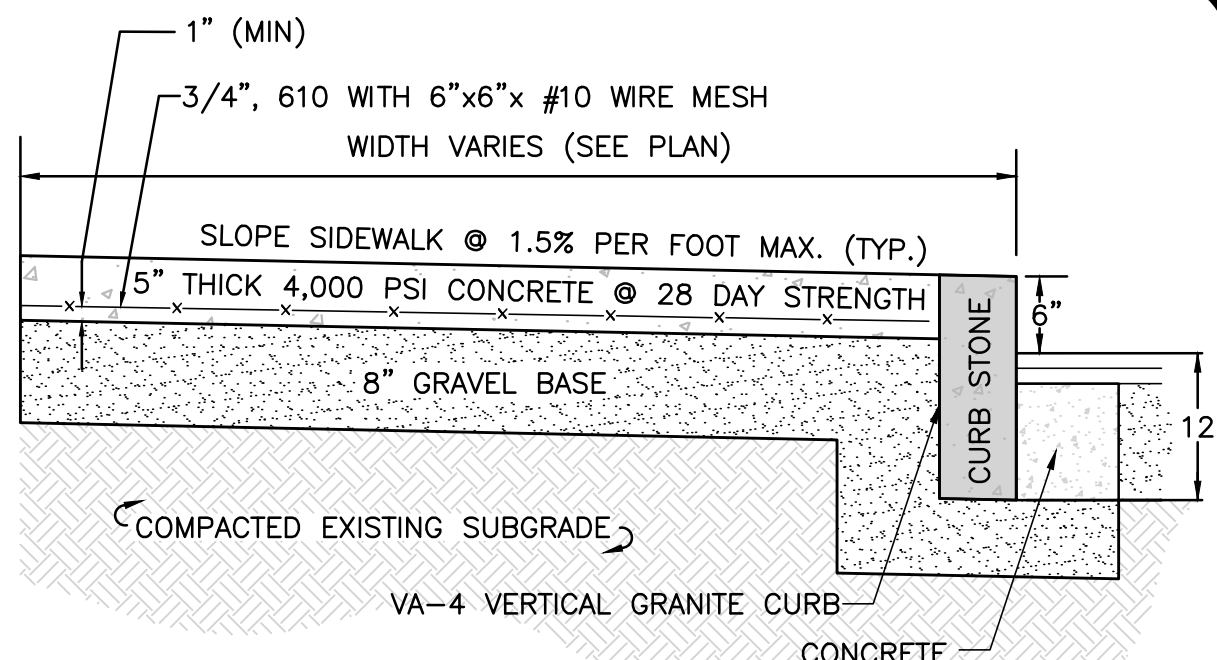

- NOTES:
1. SIDEWALK TO HAVE TOOLED JOINTS IN A 5' x 5' (TYP.) GRID WITH EXPANSION JOINTS 15' ON CENTER AND PREMOLDED FILLER.
 2. SEE PLAN VIEW FOR ELEVATIONS AT CURB
 3. SIDEWALK CROSS SLOPE TO BE 1.5% MAX & SIDEWALK LONGITUDINAL RUNNING SLOPE TO BE 4.5% MAX, TYP.

CONCRETE SIDEWALK WITH VGC CURBSTONE
NOT TO SCALE

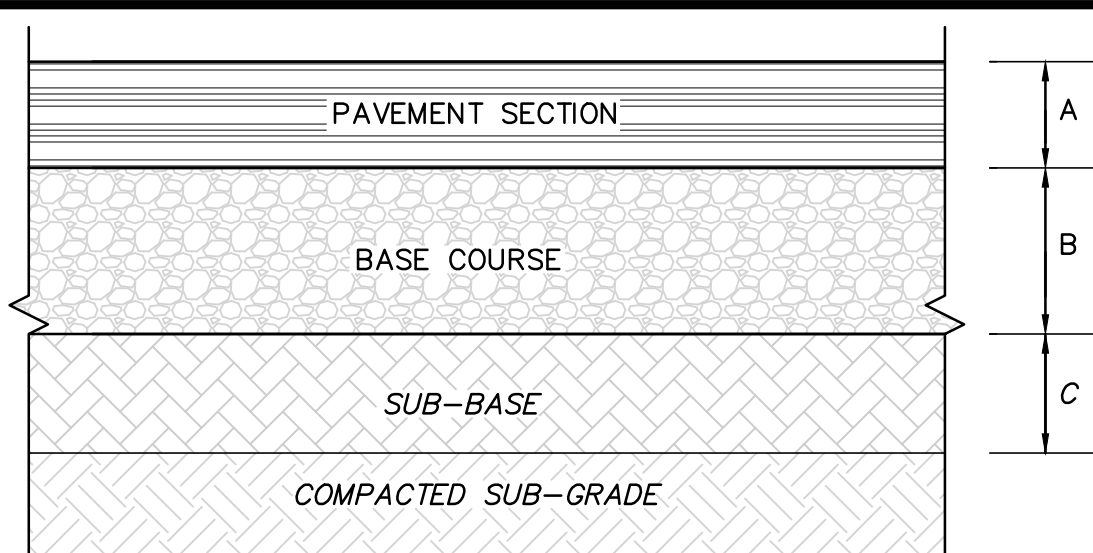

- NOTES:
1. PAVEMENT SECTION, BASE COURSE, AND SUBGRADE SHALL BE PER GEOTECHNICAL ENGINEER'S RECOMMENDATIONS. IN THE ABSENCE OF A GEOTECHNICAL ENGINEER'S RECOMMENDATION, THE MATERIALS AND THICKNESS SHALL BE AS SHOWN HEREON.
 2. SUBGRADE SHALL BE COMPACTED TO 95% OF PROCTOR
 3. EXISTING SUBSURFACE SOILS SHALL BE PROOF-ROLLED.

MATERIALS AND THICKNESSES:


A = 1.5" ASPHALT CONCRETE - SURFACE COURSE (M3.11.0, TABLE A, TOP COURSE)
2.5" ASPHALT CONCRETE - BINDER COURSE (M3.11.0, TABLE A, BINDER COURSE)

B = 6" PROCESSED GRAVEL BASE (MHD M2.01.7)

C = 12" BANK RUN GRAVEL MHD M1.03.0 TYPE B)

ASPHALT PAVEMENT SECTION
NOT TO SCALE

NOTE:
TACK COAT - PROVIDE EMULSIFIED ASPHALT WHICH CONFORMS TO THE REQUIREMENTS OF THE STATE SPECIFICATIONS, DILUTED WITH ONE PART WATER TO ONE ONE PART ASPHALT FOLLOWING AASHTO M140/ASTM D997, OR AASHTO M208/ASTM D2397, SS-1H, CSS-1, OR CSS-1H.

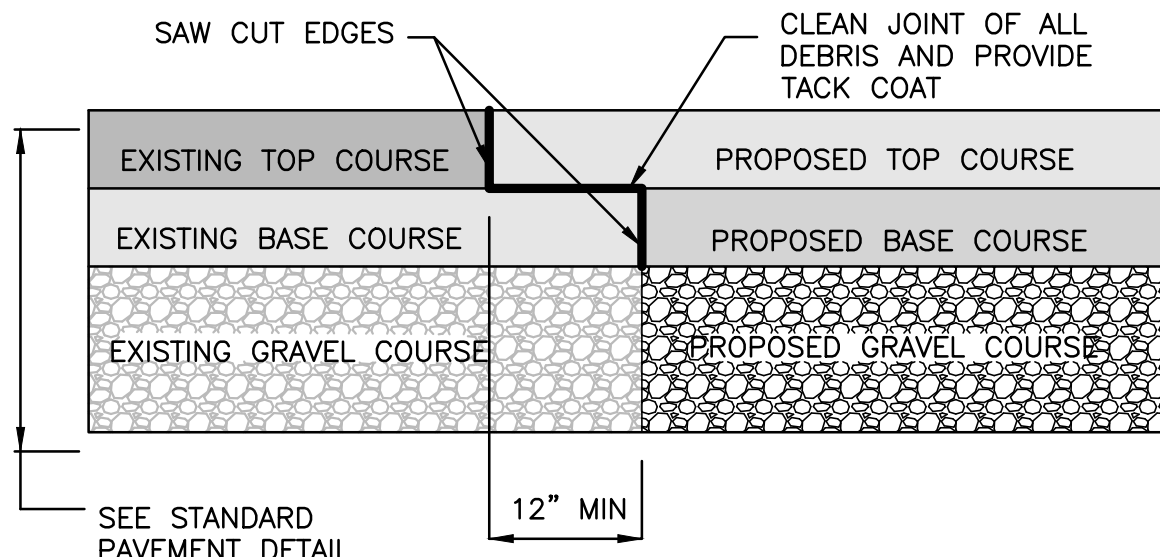

PAVEMENT KEY CUT DETAIL
NOT TO SCALE



PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO. 2729-01 DATE: 04-10-20

SCALE: AS SHOWN DWG. NAME: C2729-01

DESIGNED BY: ARM CHECKED BY: BDJ/RC

PREPARED BY:



THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENTS REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.




DRAWING TITLE:

DETAILS






SHEET No.

C-501

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

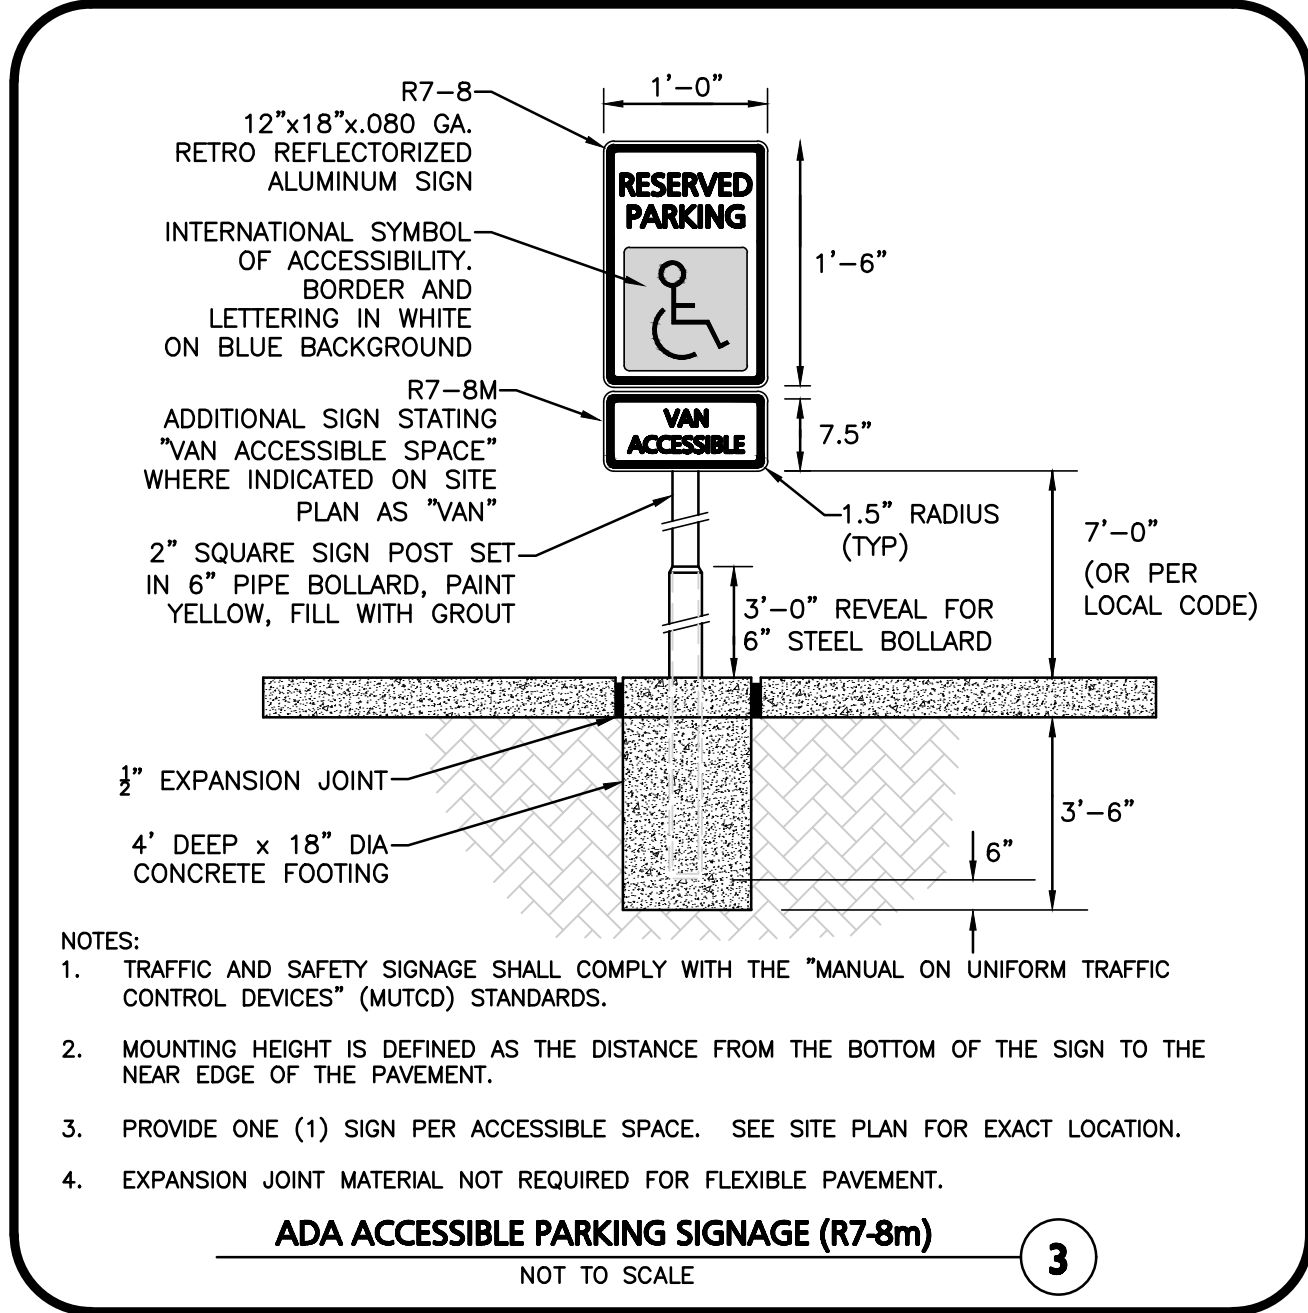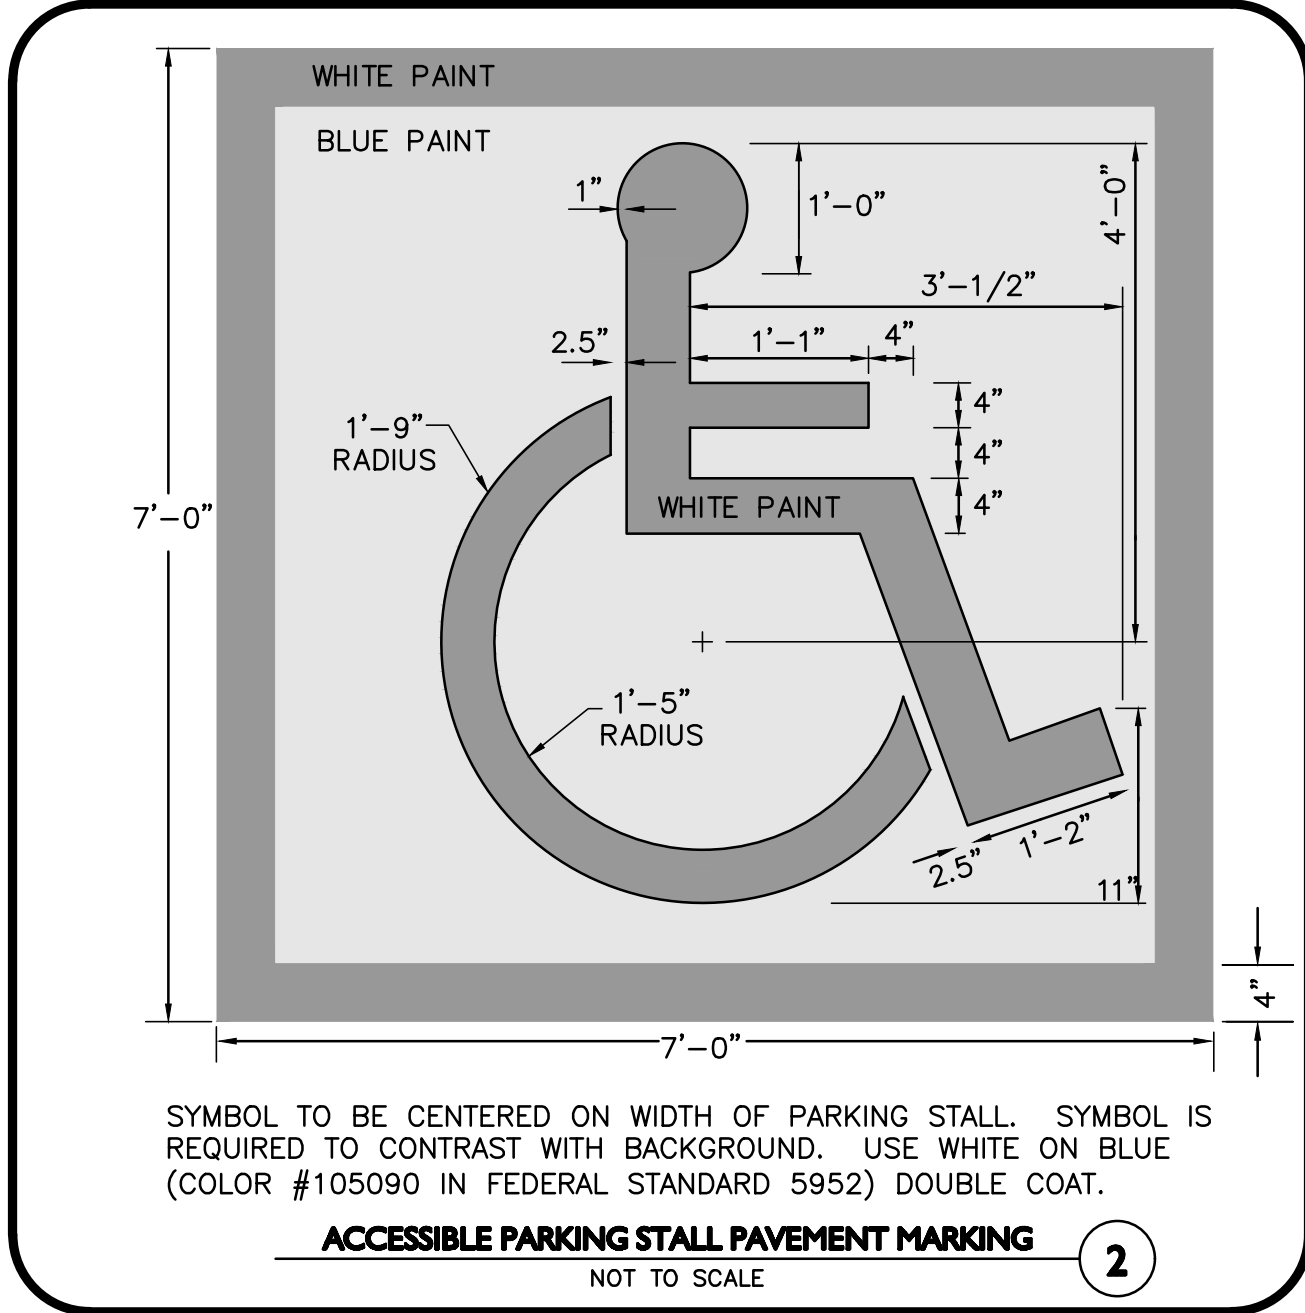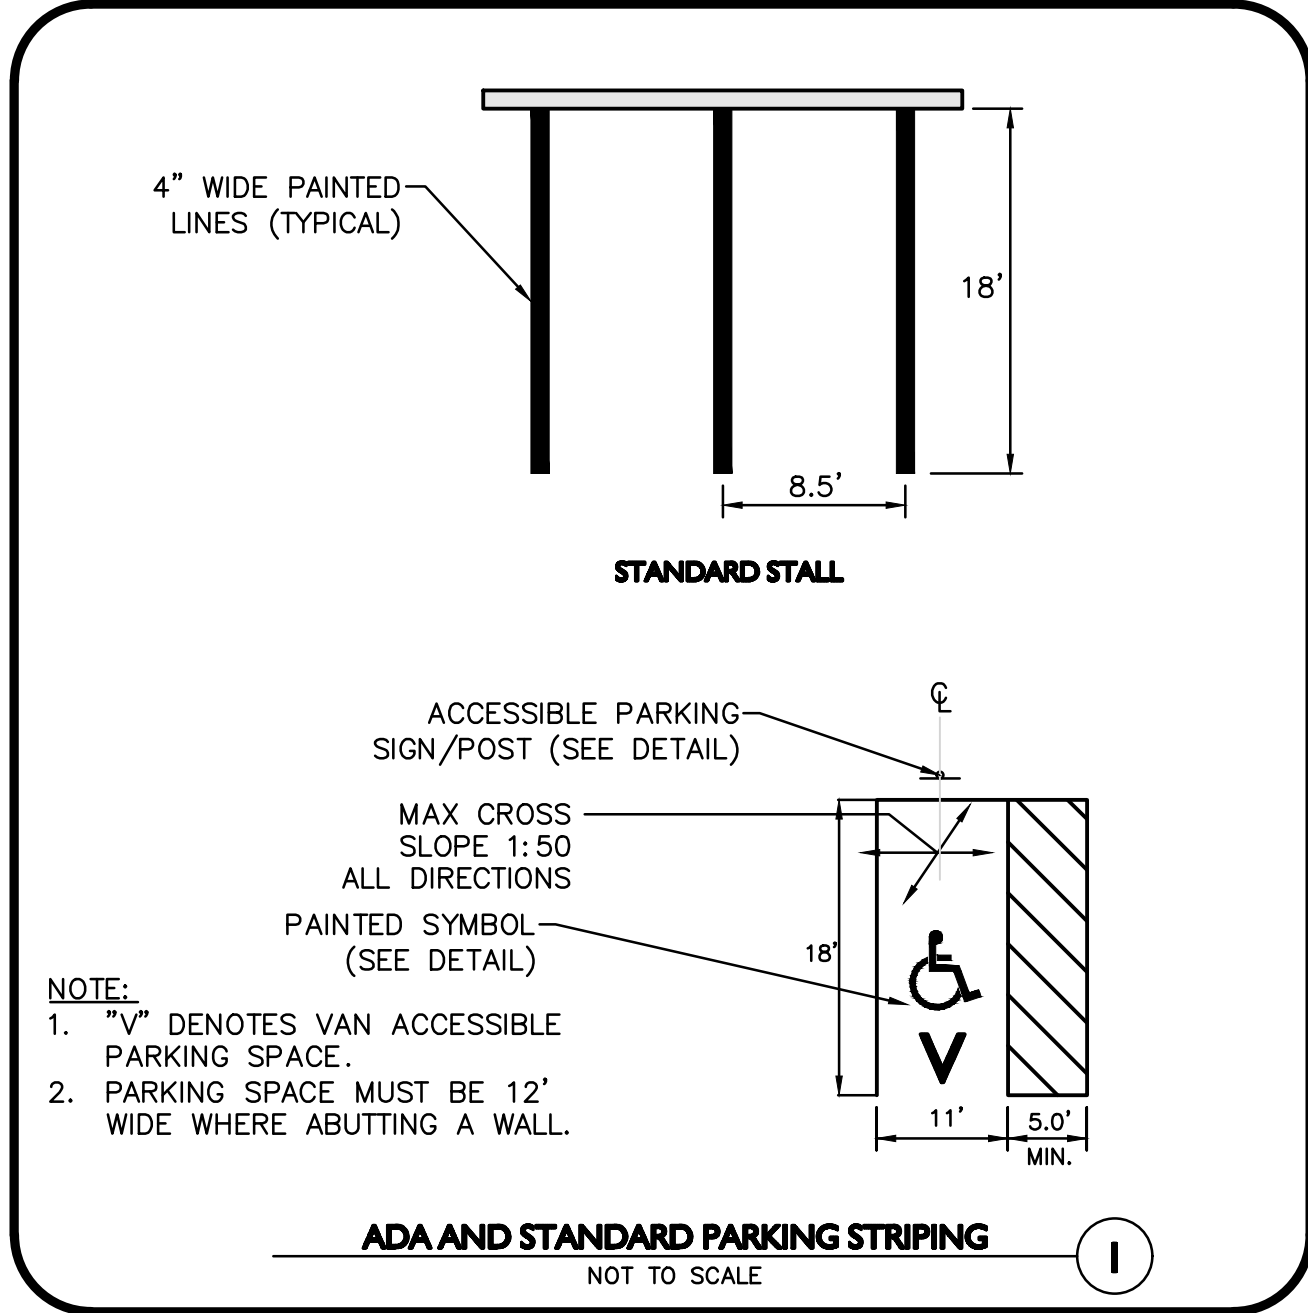

DESC.	SIGN	SIZE	MOUNTING HEIGHT	DESCRIPTION	REFLEC-TORIZED
R7-8M (MODIFIED)		12" x 26"	7' - 0"	WHITE TEXT ON BLUE FIELD WITH WHITE BORDER	YES

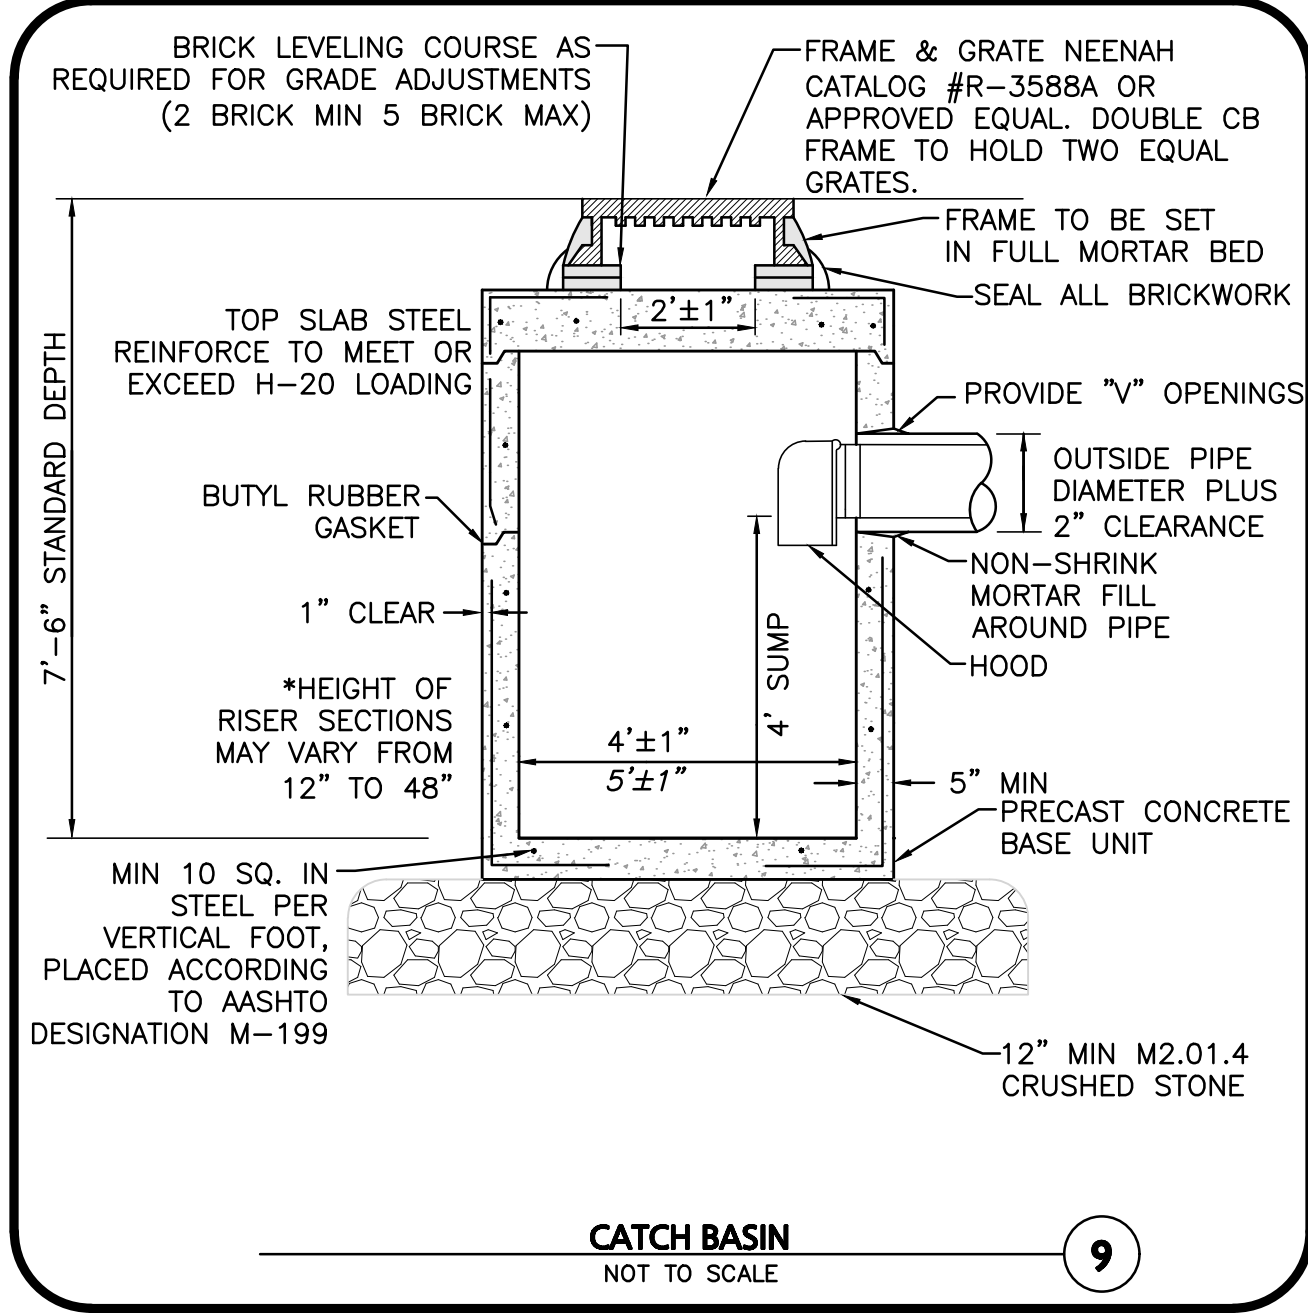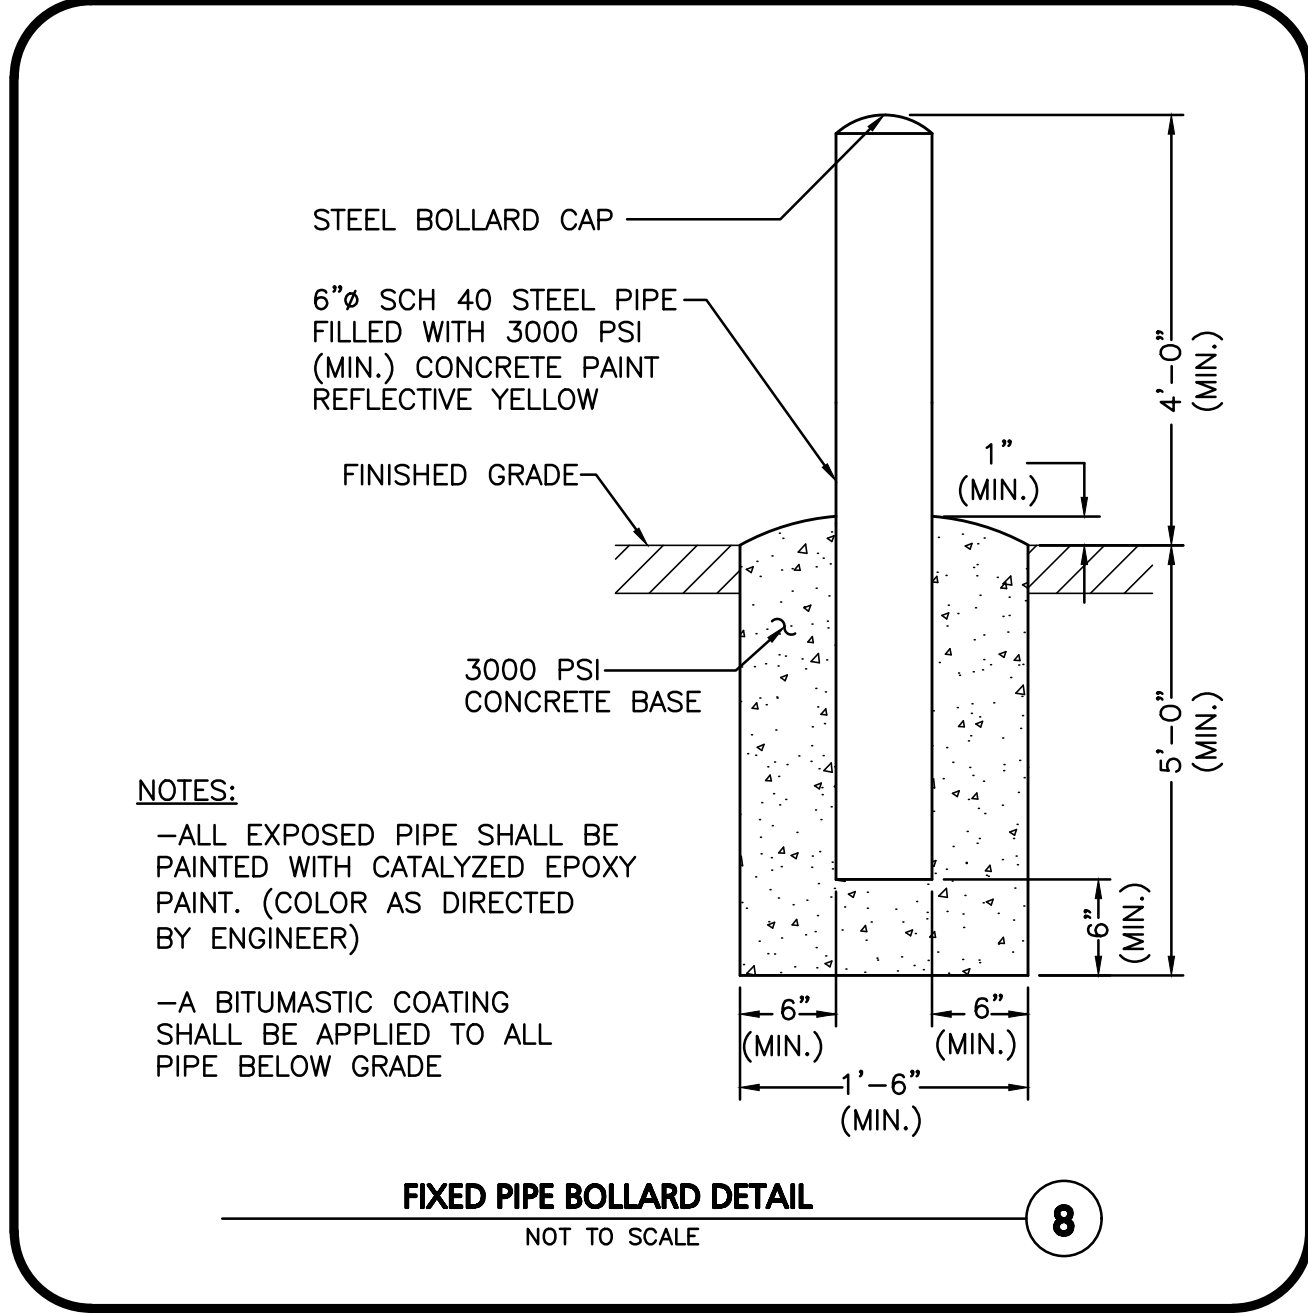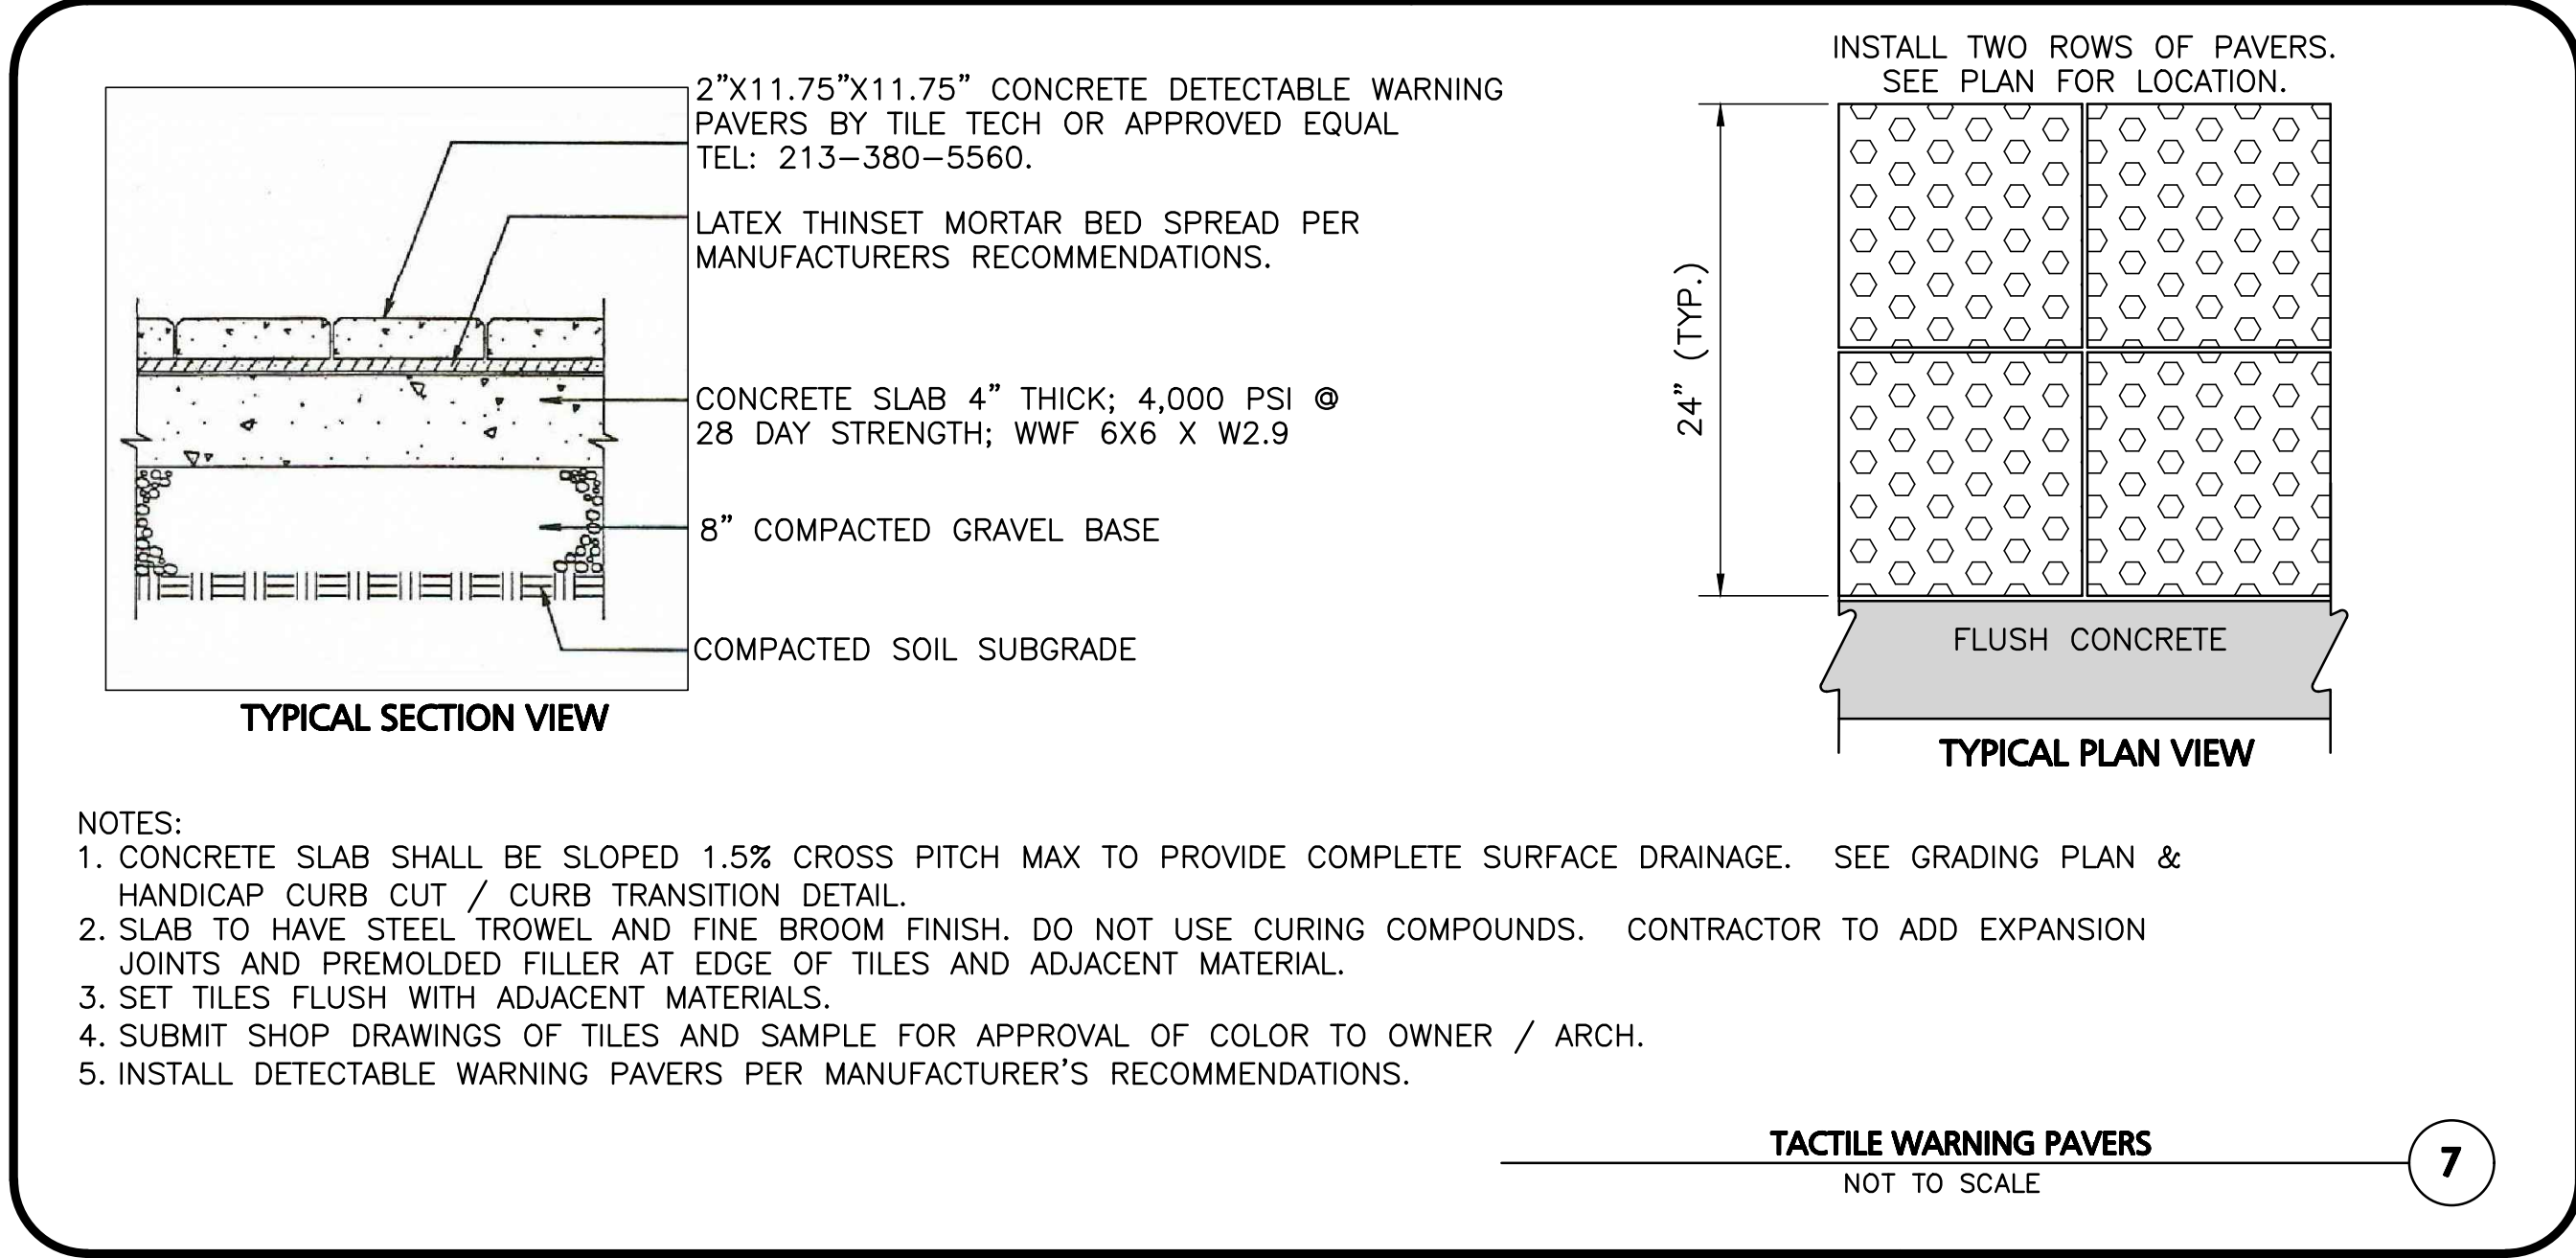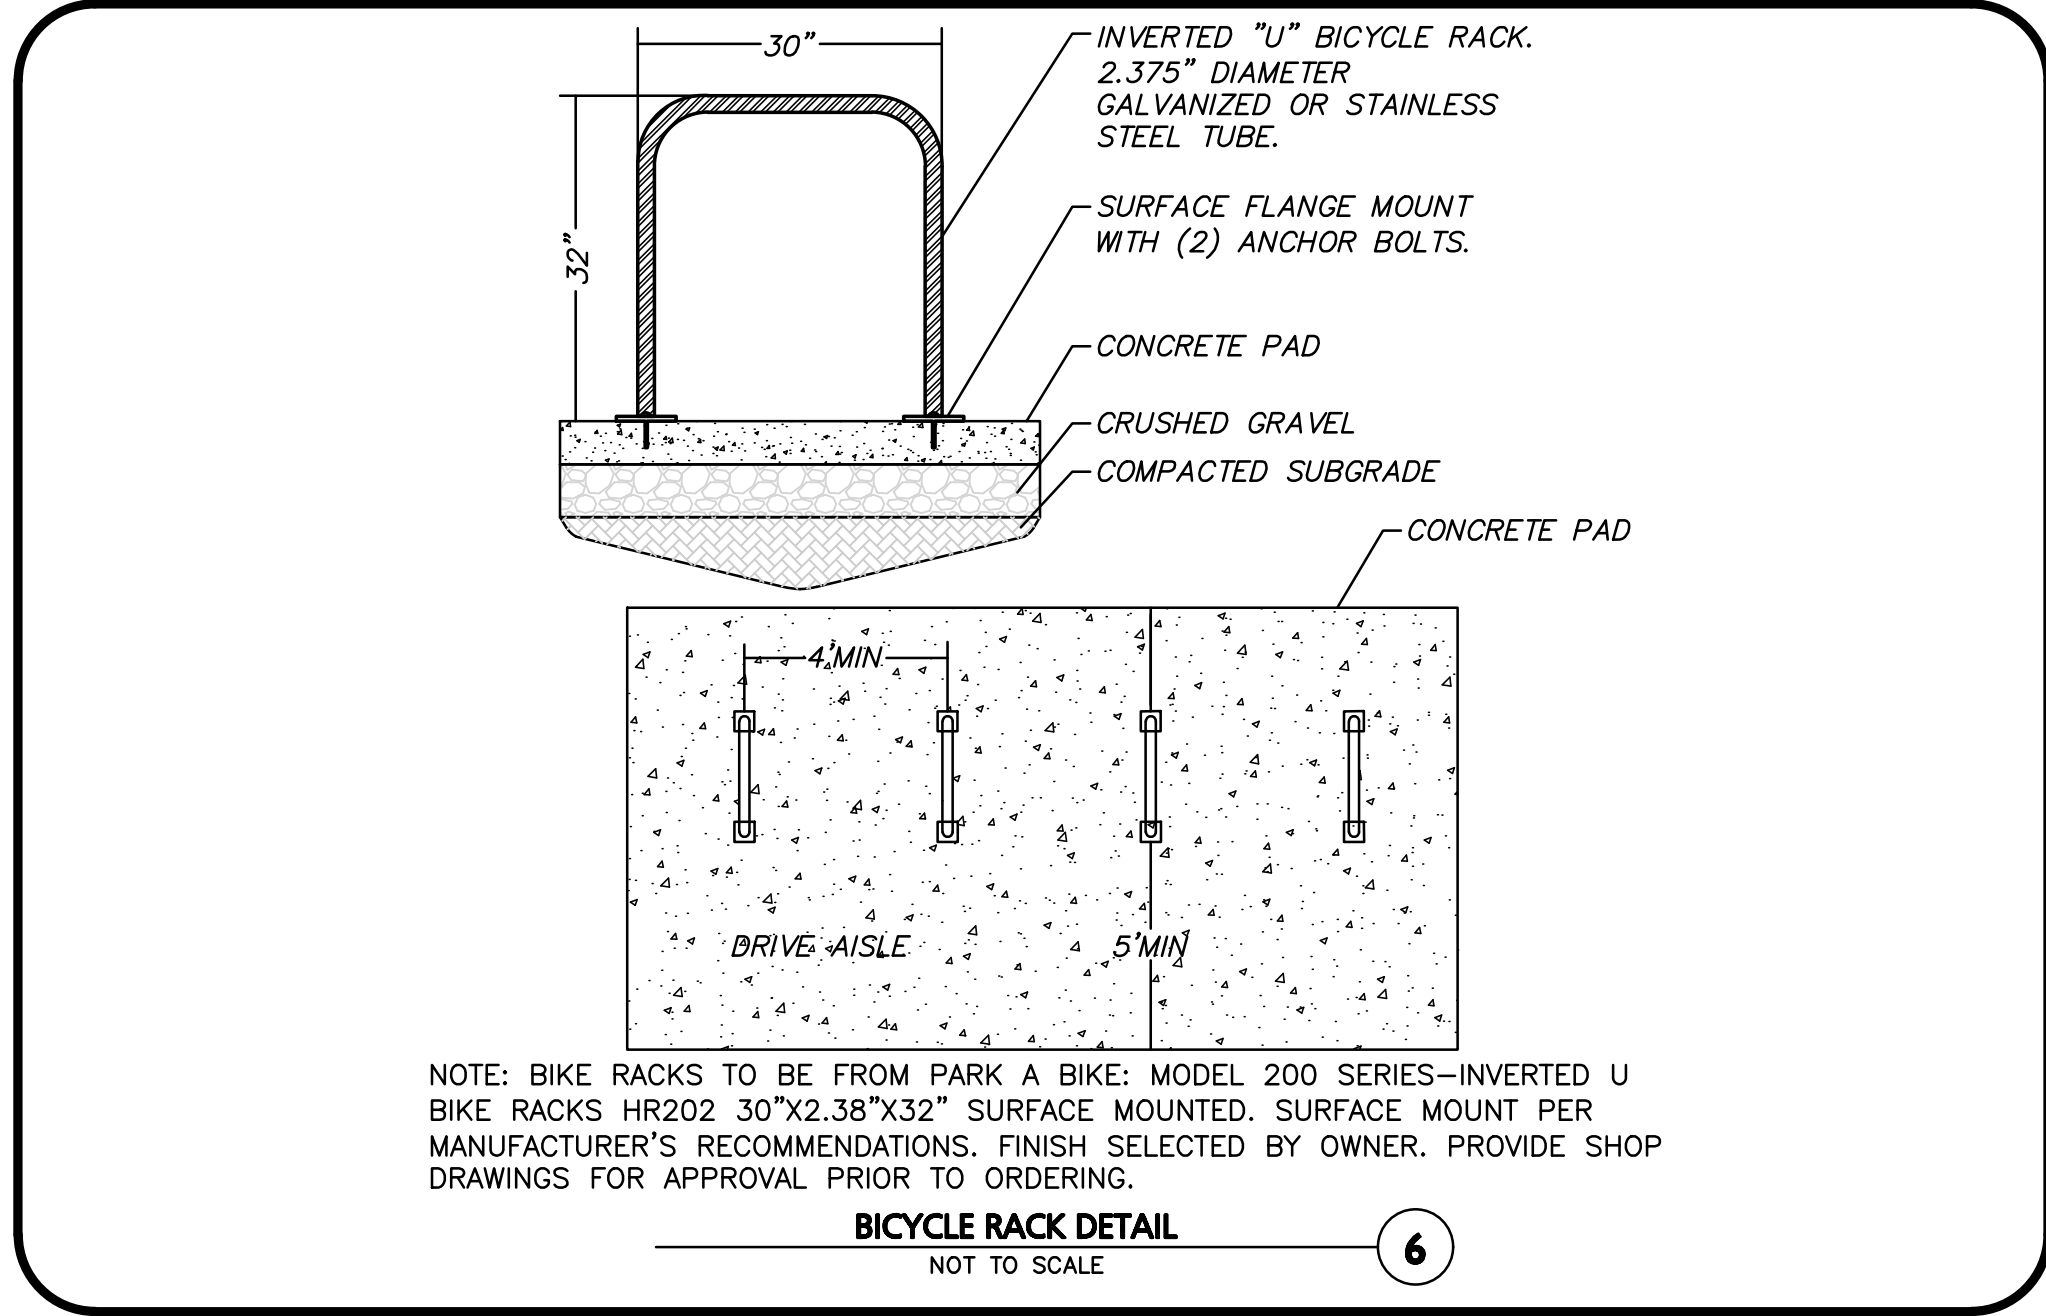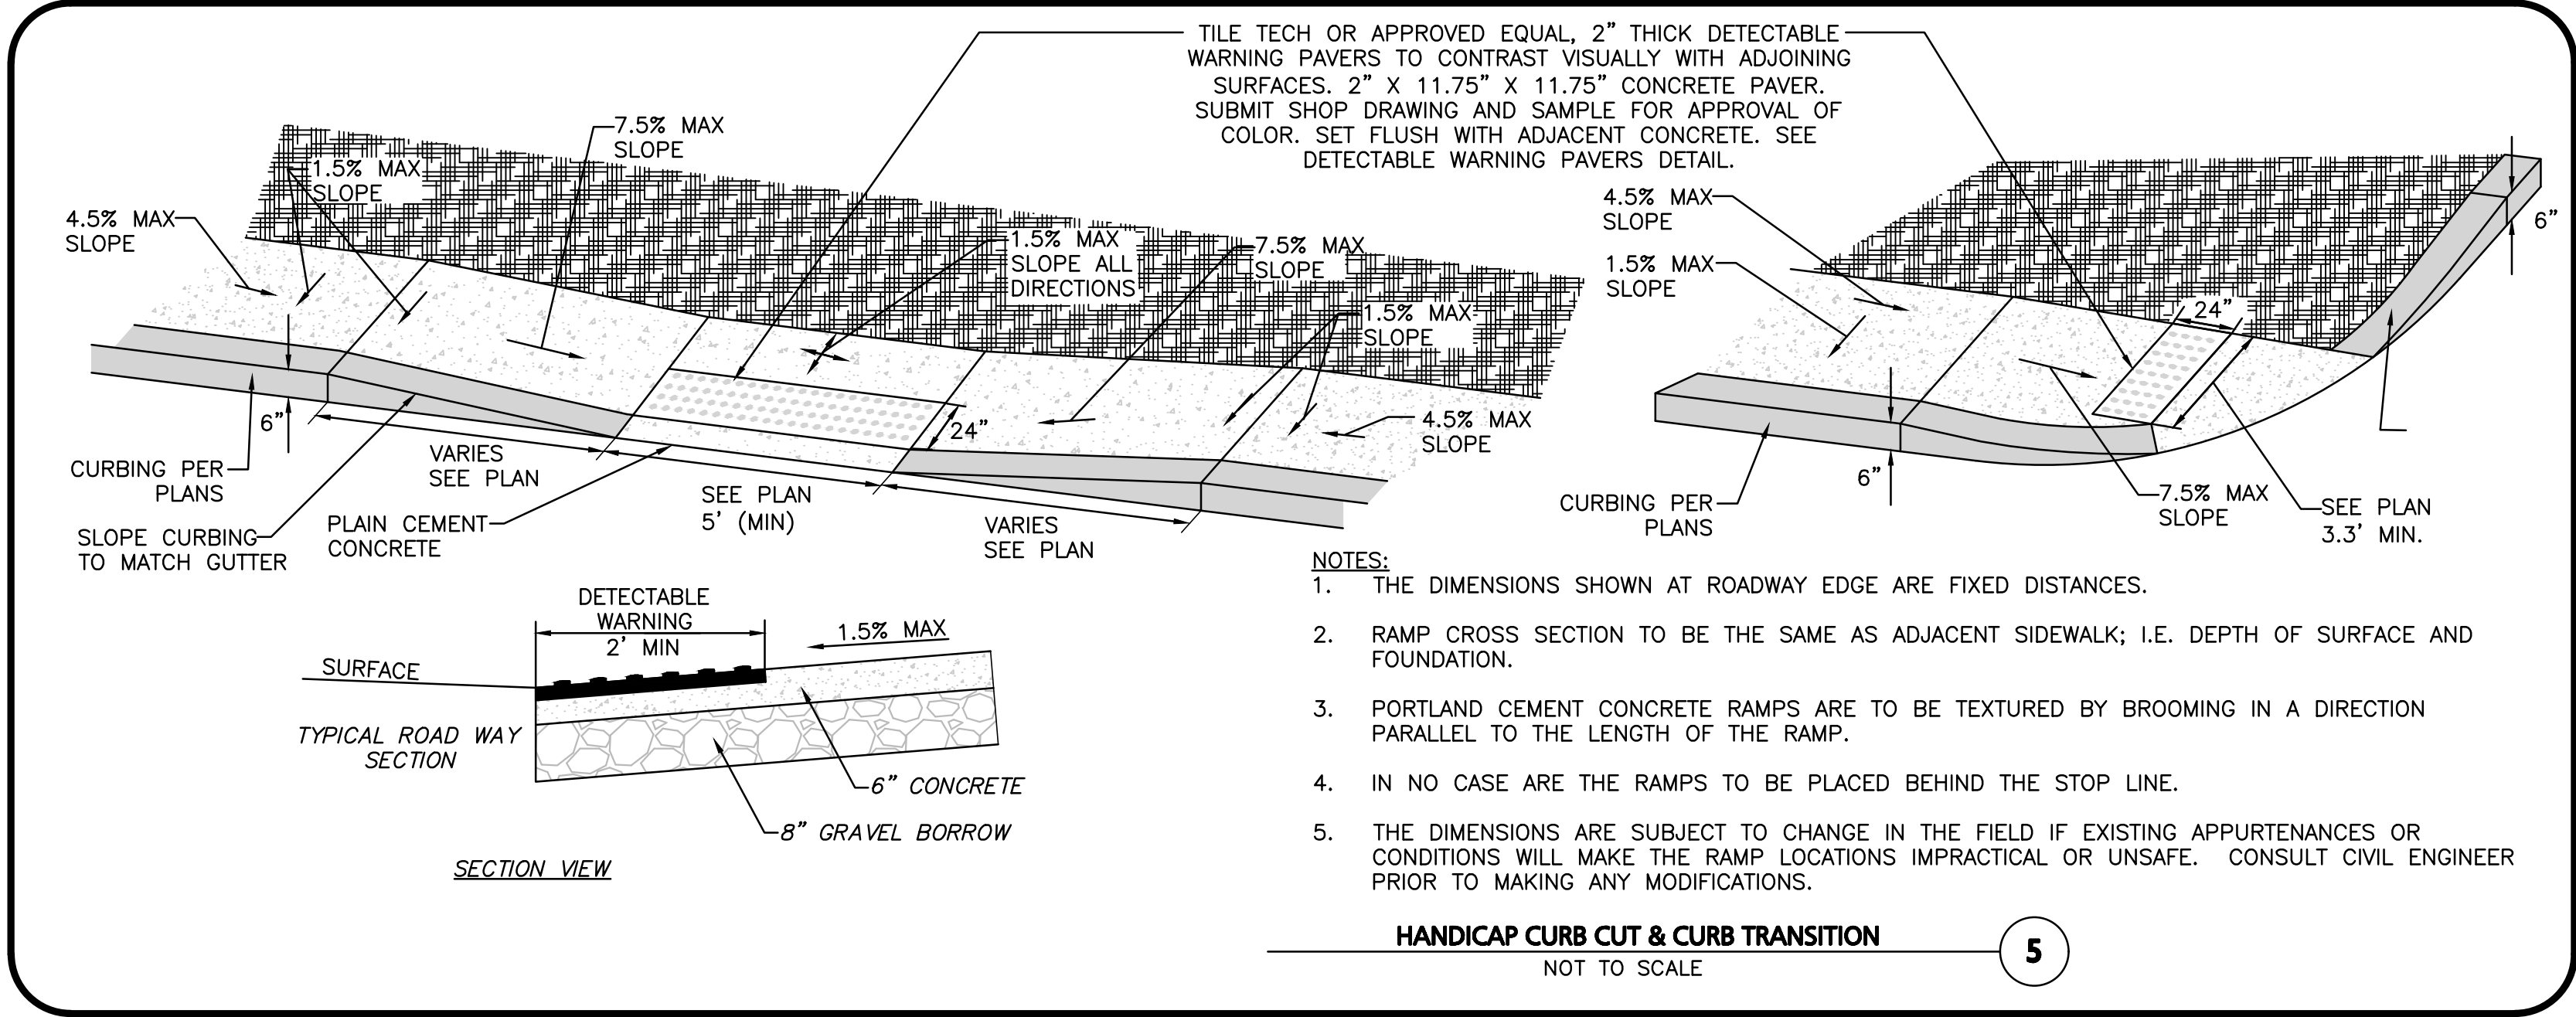

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	AS SHOWN	DWG. NAME:	C272901
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC







PREPARED BY:

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
DETAILS	C-502

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

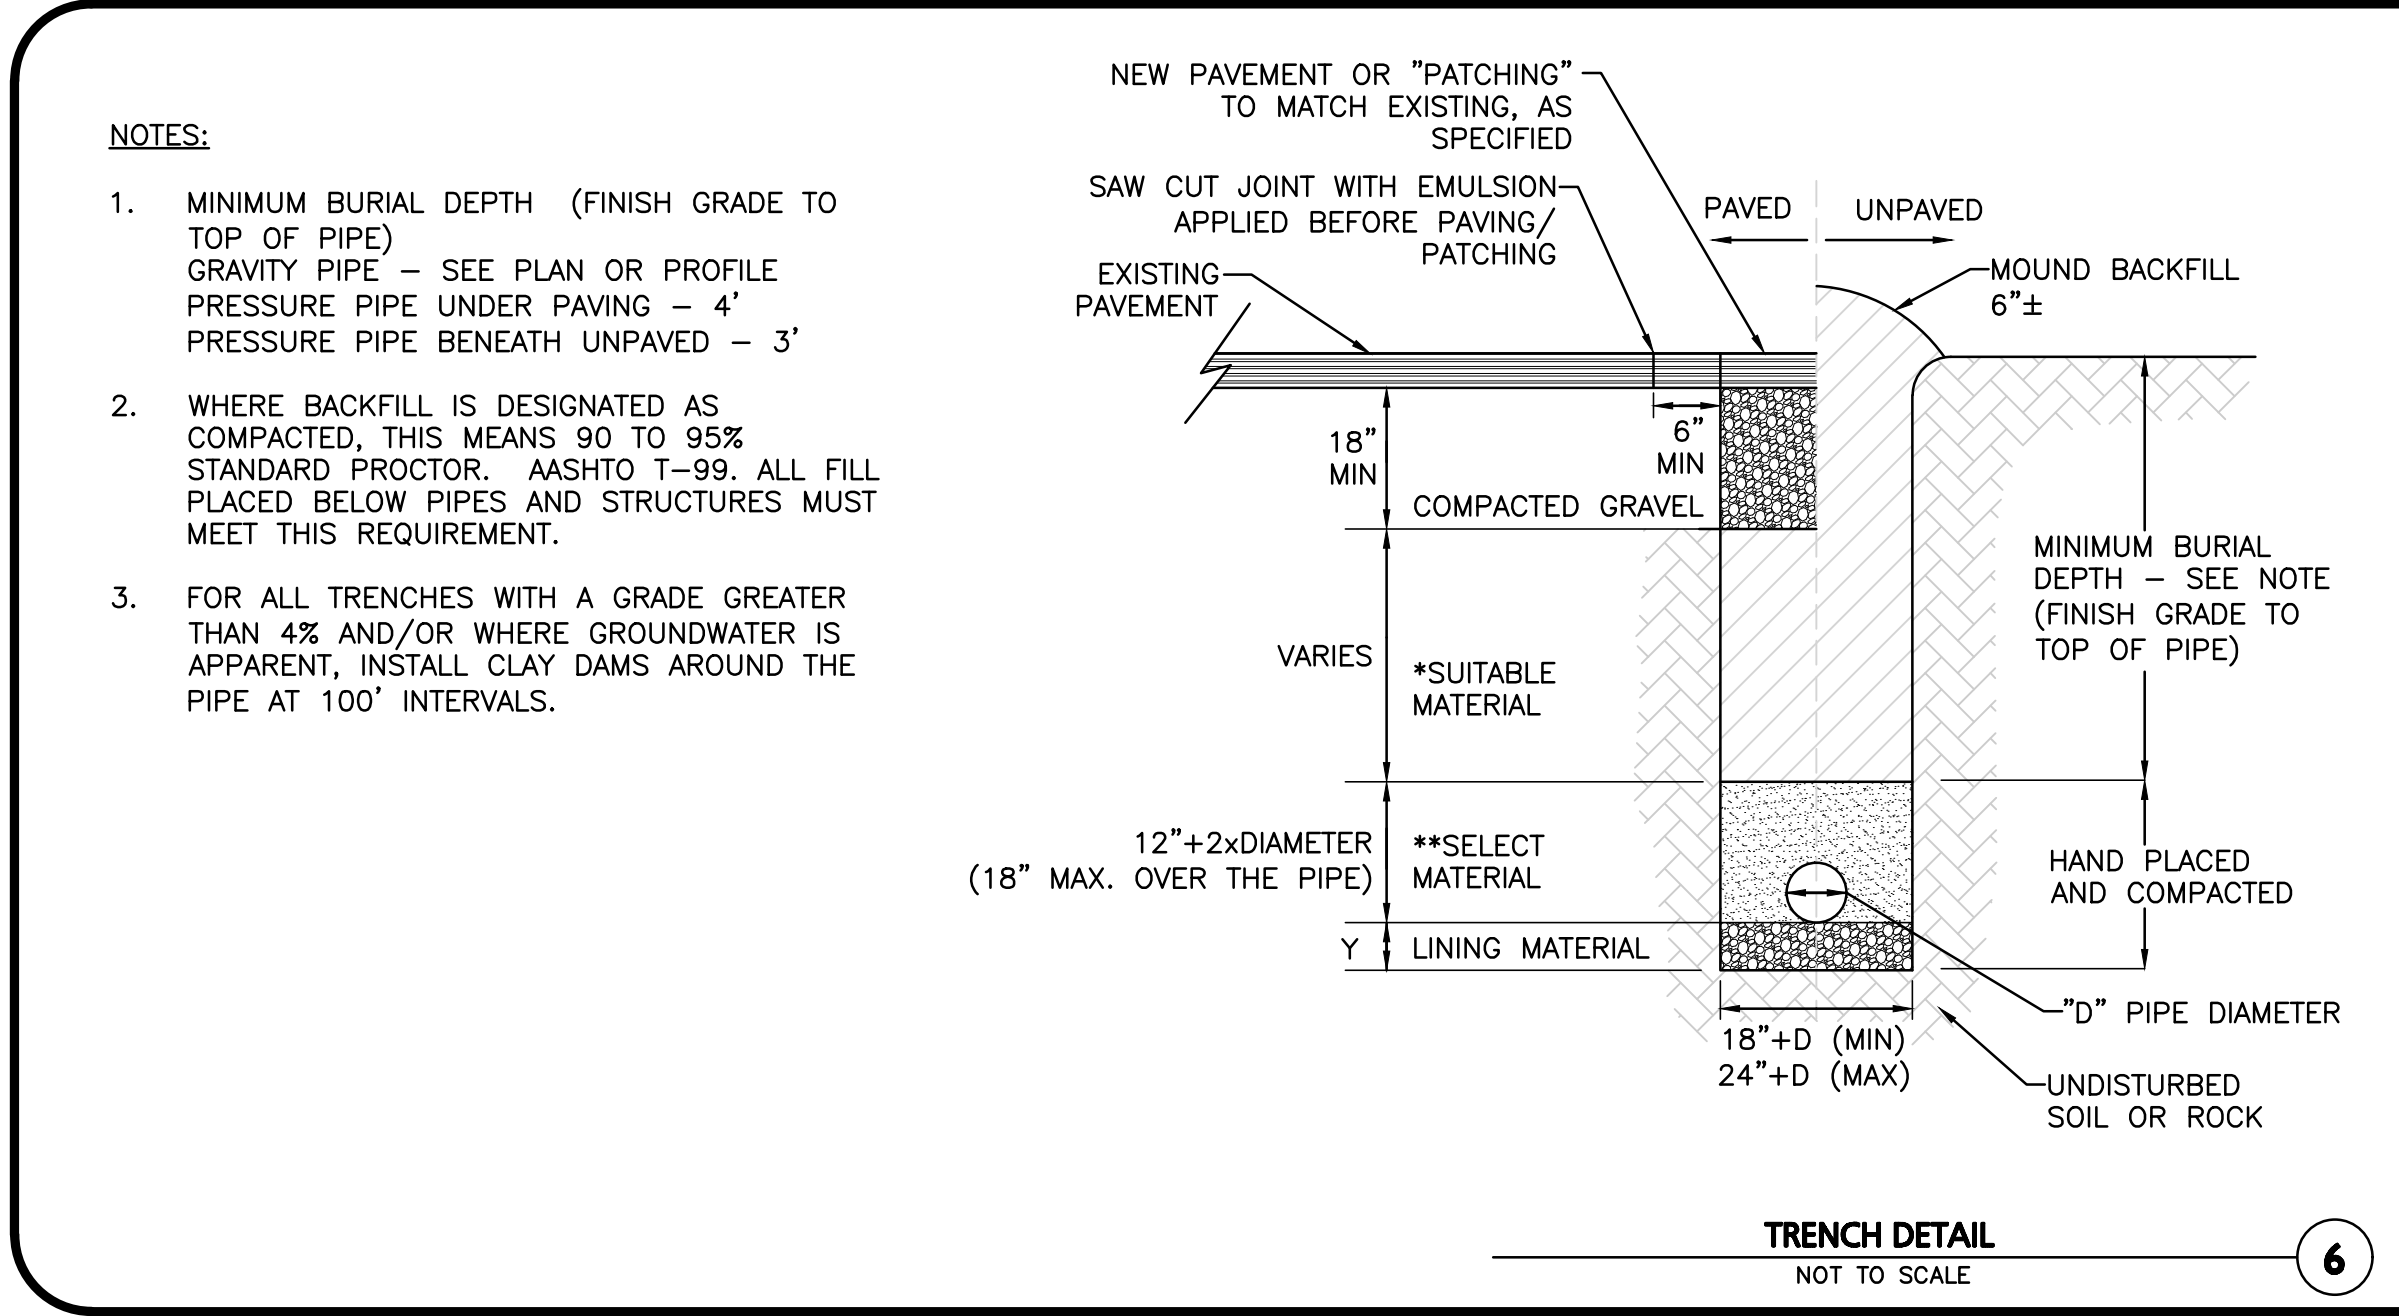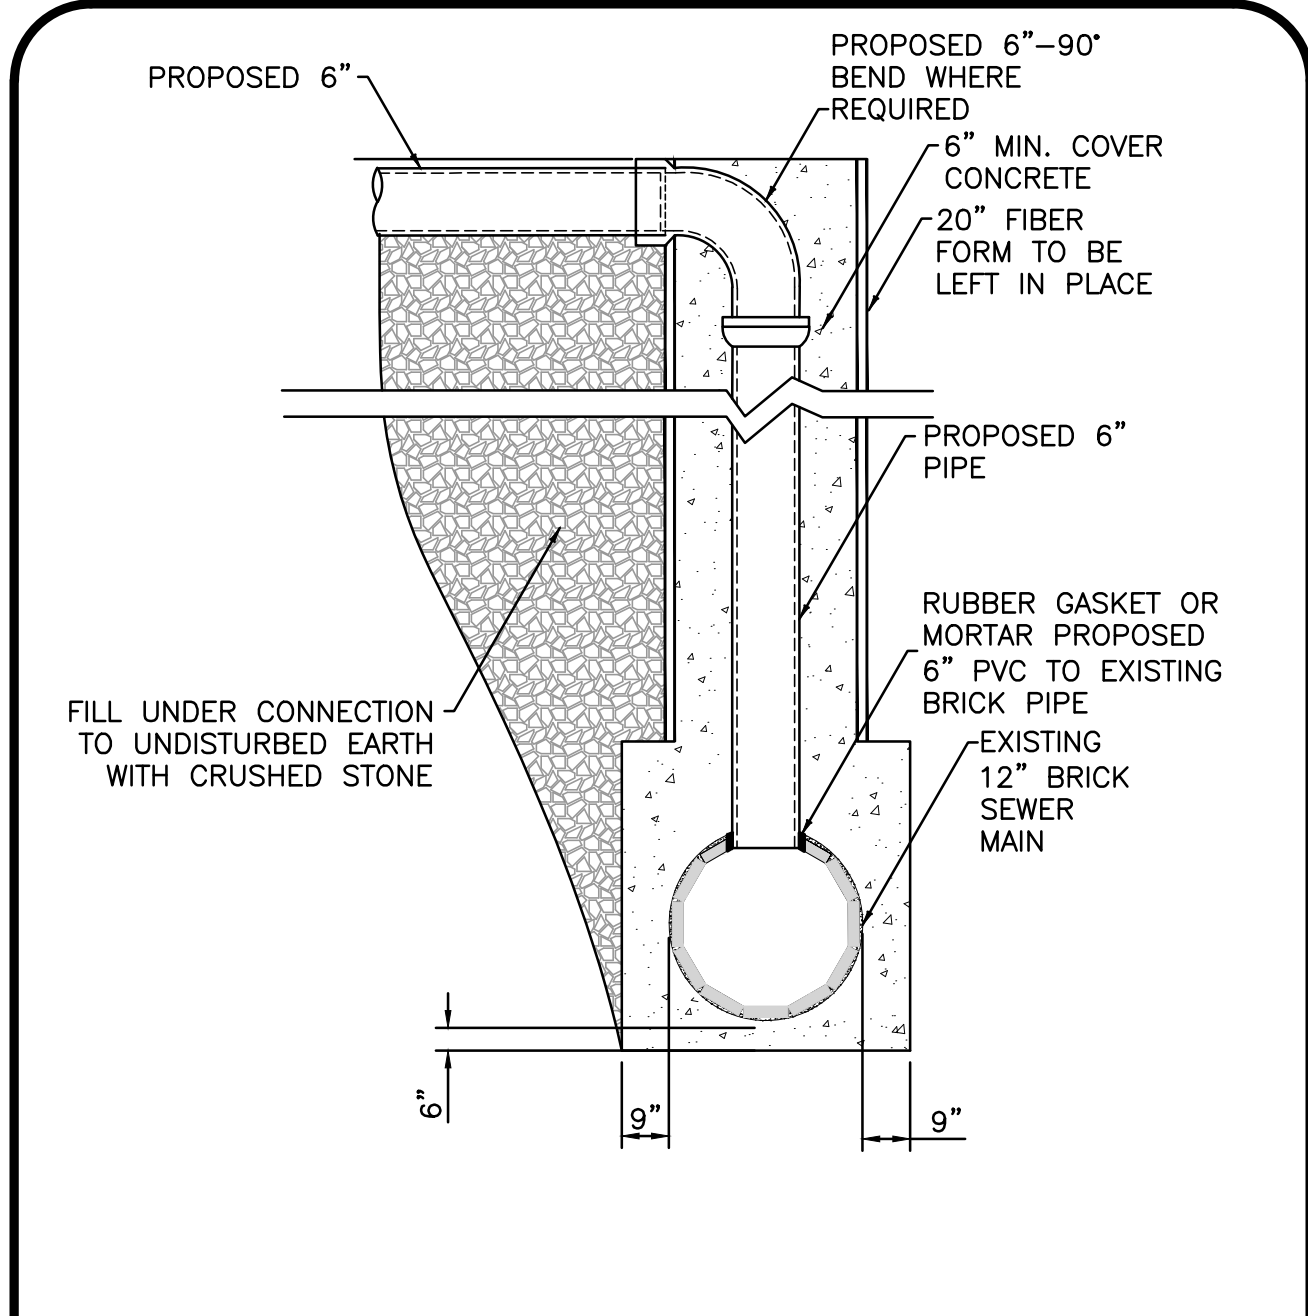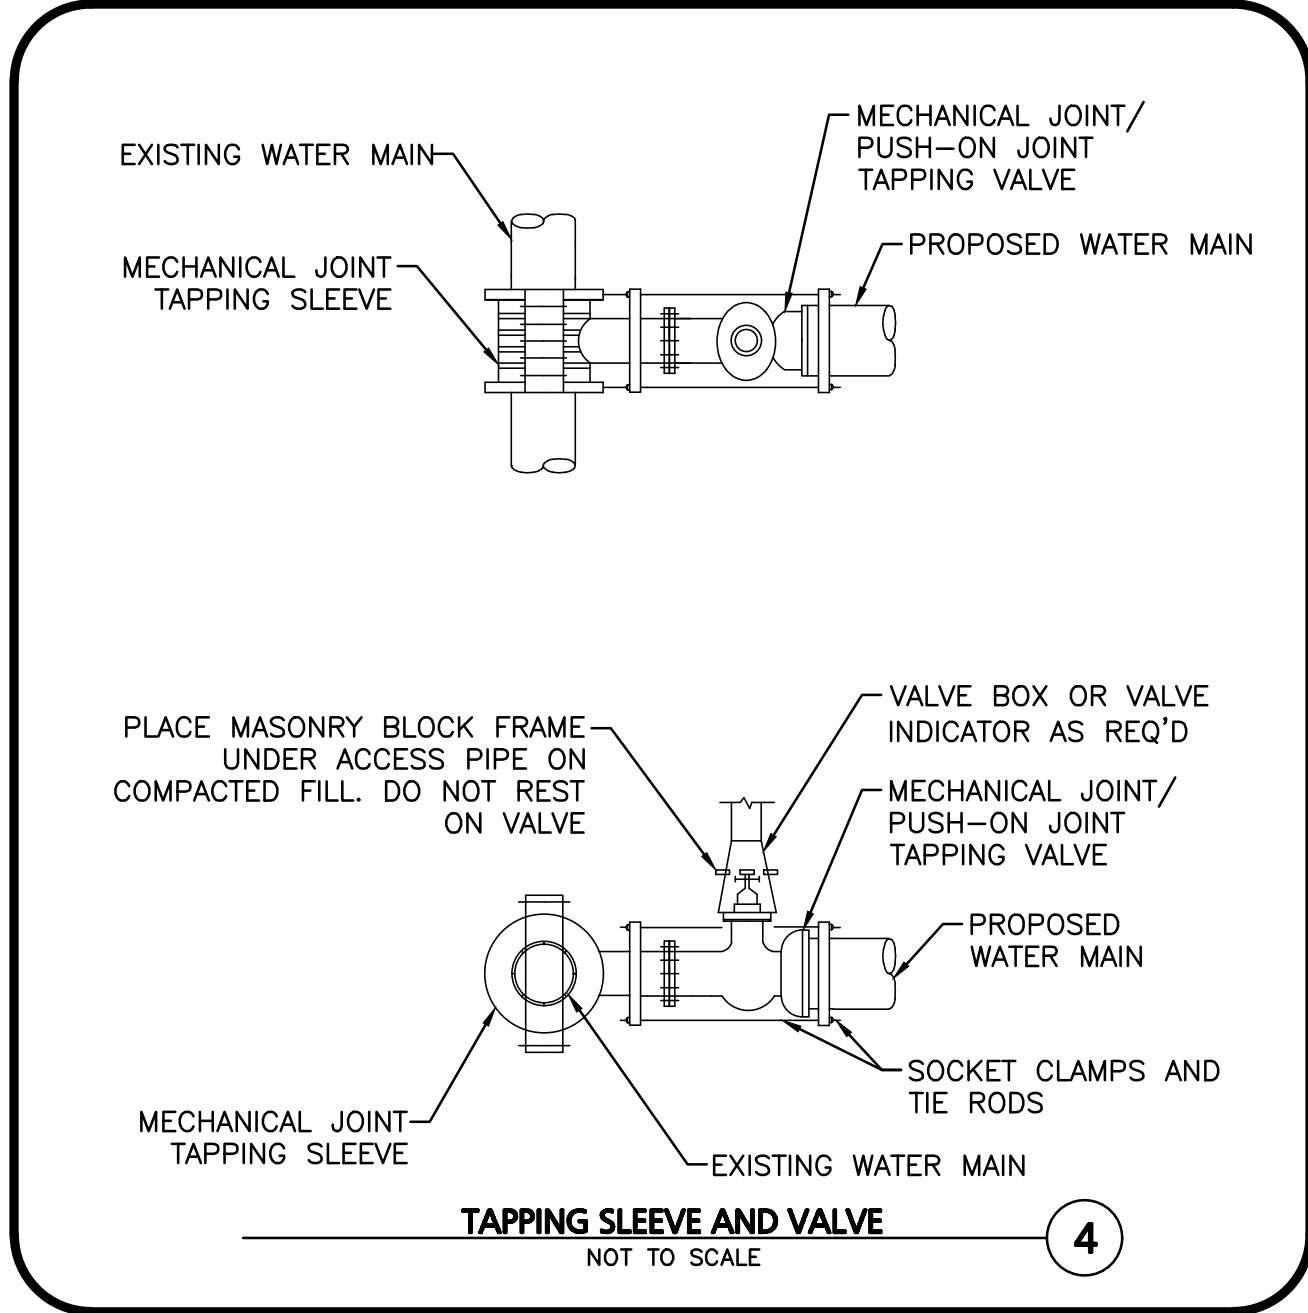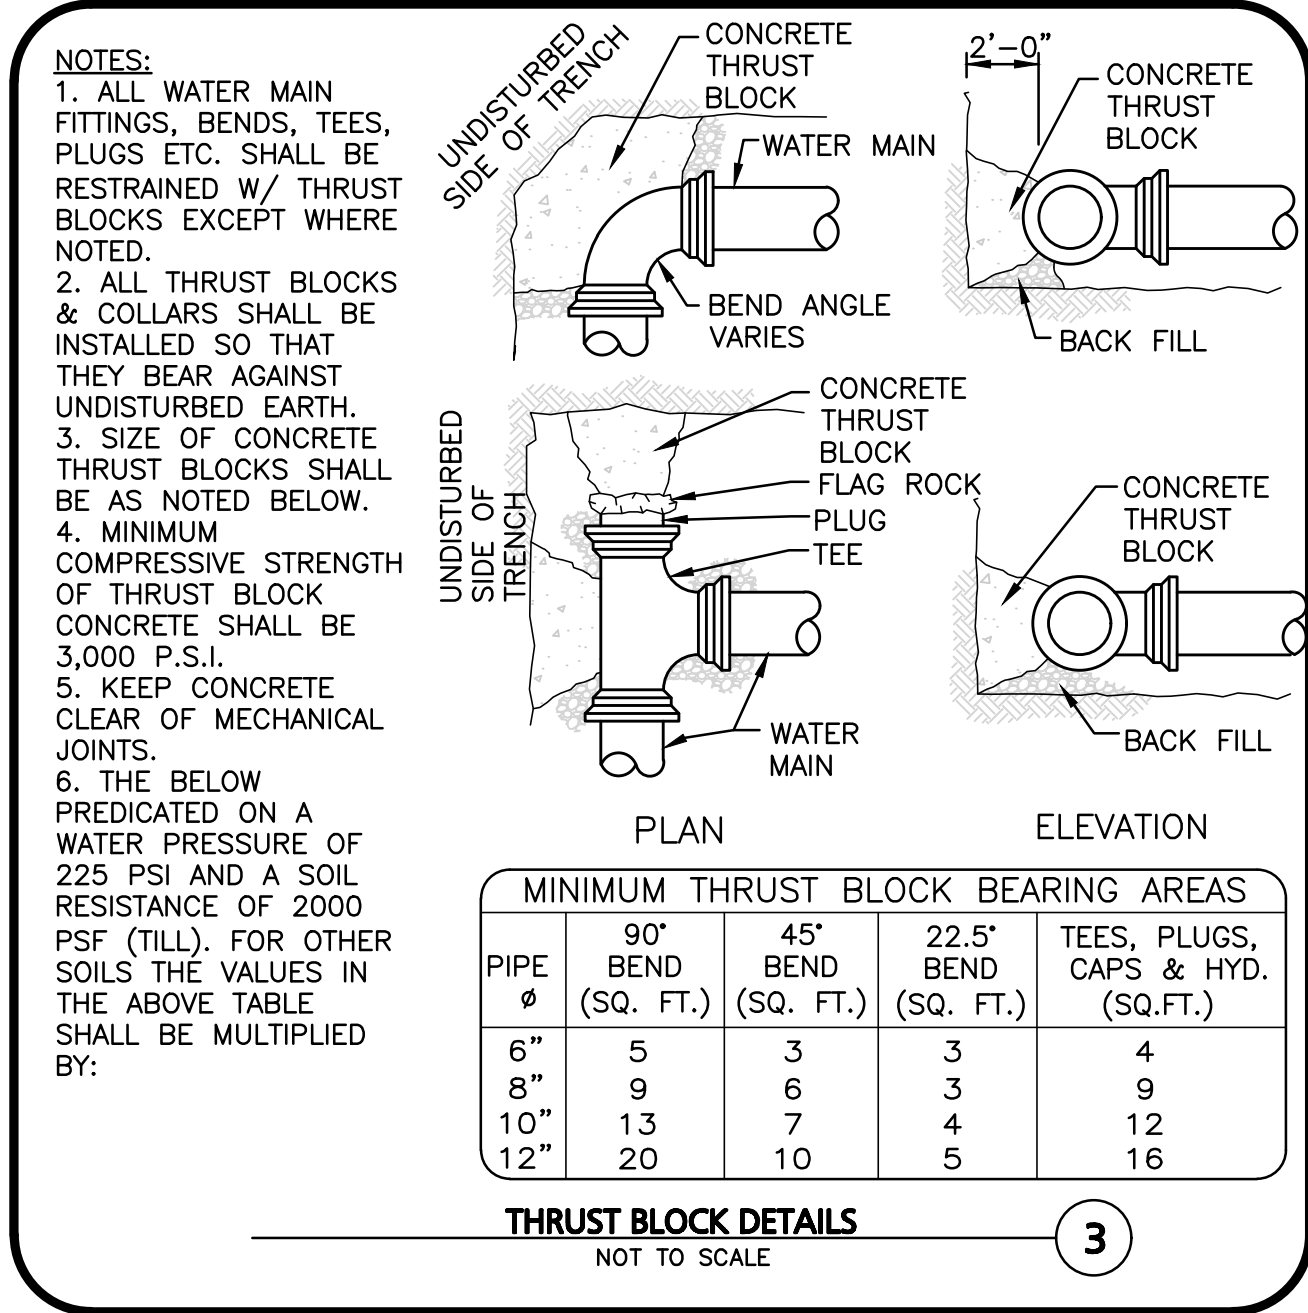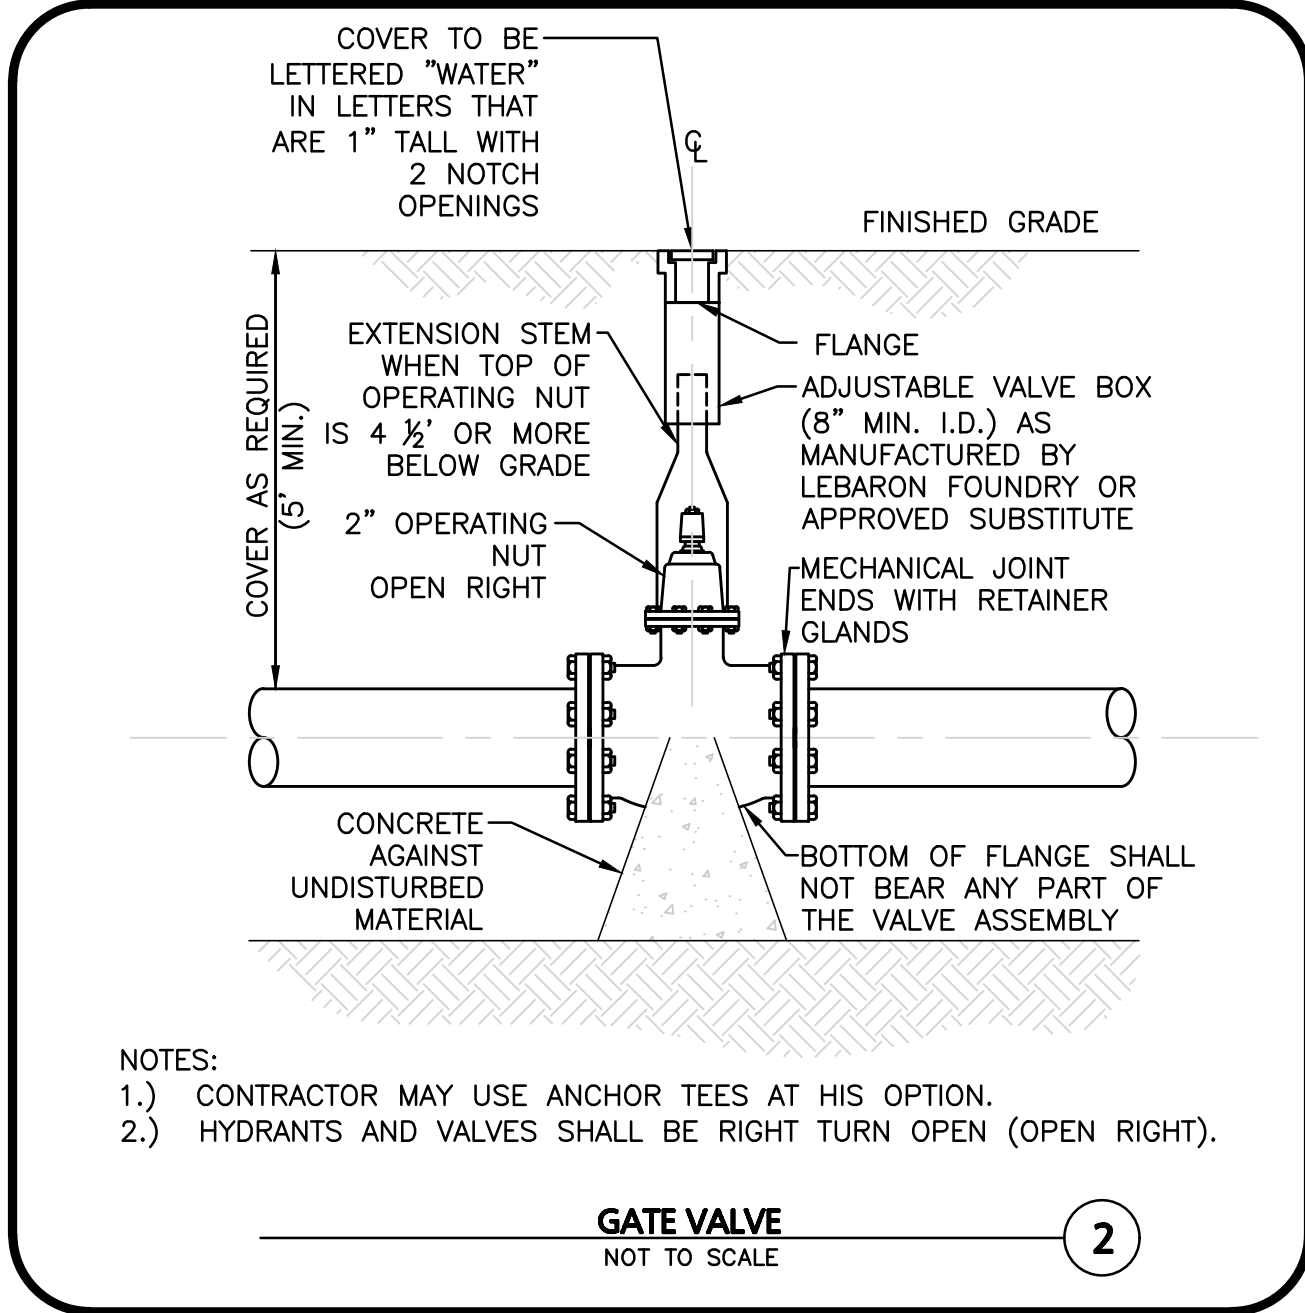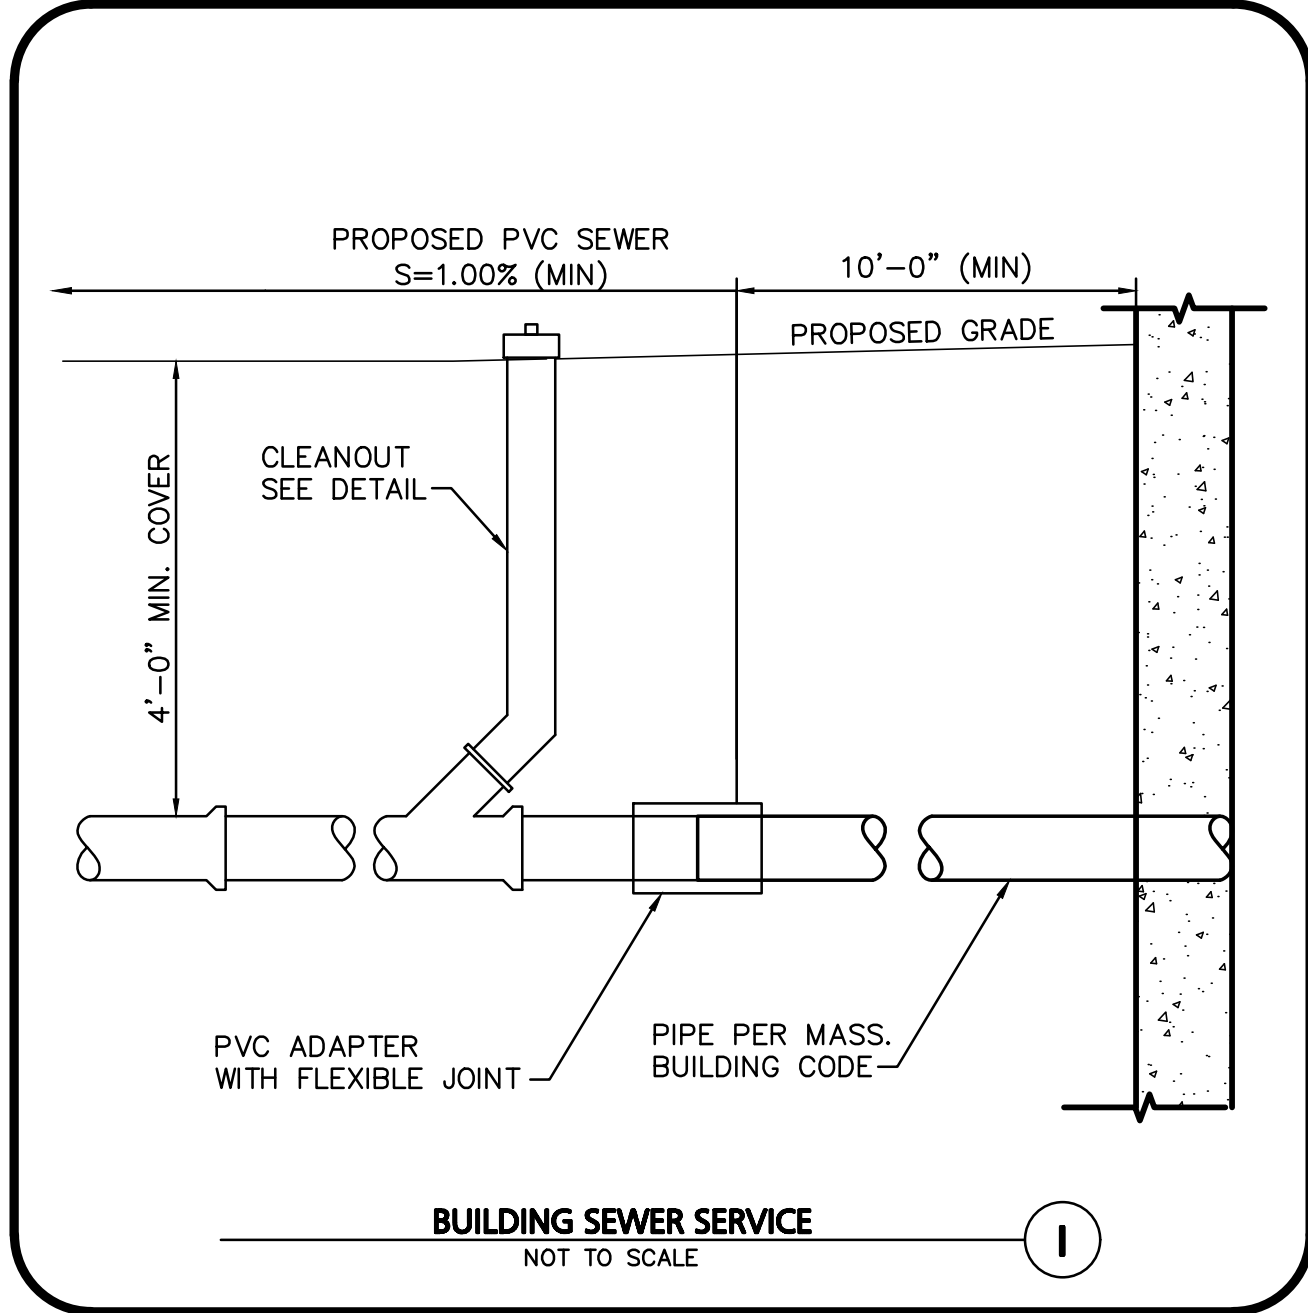


CONDITION & PIPE	**SELECT MATERIAL	LINING MATERIAL	Y-DIMENSION
DUCTILE IRON "ORDINARY SOIL"	TYPE I, II, OR III	SAND OR TYPE III	3"
RCP "ORDINARY SOIL"	TYPE II OR III	SAND OR TYPE III	3"
ALL PIPE OVER BEDROCK OR LEDGE	TYPE II OR III	SAND OR TYPE III	8"
DUCTILE IRON IN CLAY OR MUCK	TYPE II OR III	SAND	4"
RCP IN CLAY	TYPE II OR III	SAND	8"
ALL PLASTICS	TYPE III	SAND OR TYPE III	6"

* SUITABLE MATERIAL SHALL CONTAIN NO STONE GREATER THAN 4" IN DIAMETER, NO FROZEN LUMPS, AND ONLY MINOR AMOUNTS OF CLAY OR ORGANIC MATERIAL. ALL MATERIAL TO BE PLACED IN MAX 12" LIFTS AND COMPACTED BEFORE PLACING NEXT LIFT.

**TYPE I MATERIAL SHALL BE EITHER GRAVEL OR EXCAVATED MATERIAL CONTAINING NO STONES GREATER THAN 1.5" DIAMETER, NO FROZEN LUMPS, CLAY OR ORGANIC MATERIAL.

**TYPE II MATERIAL SHALL BE CLEAN, HARD, CRUSHED OR NATURAL STONE WITH A GRADATION BY WEIGHT OF 100% PASSING A 1.5" SQUARE OPENING, NOT MORE THAN 25% PASSING A 3/4" OPENING, AND NOT MORE THAN 5% PASSING A 1/2" SQUARE OPENING.

**TYPE III MATERIAL SHALL BE CLEAN, HARD, CRUSHED STONE FREE FROM COATINGS AND THOROUGHLY WASHED WITH A GRADATION BY WEIGHT OF 100% PASSING A 1" SQUARE OPENING, AND 0 TO 5% PASSING A 1/2" SQUARE OPENING.

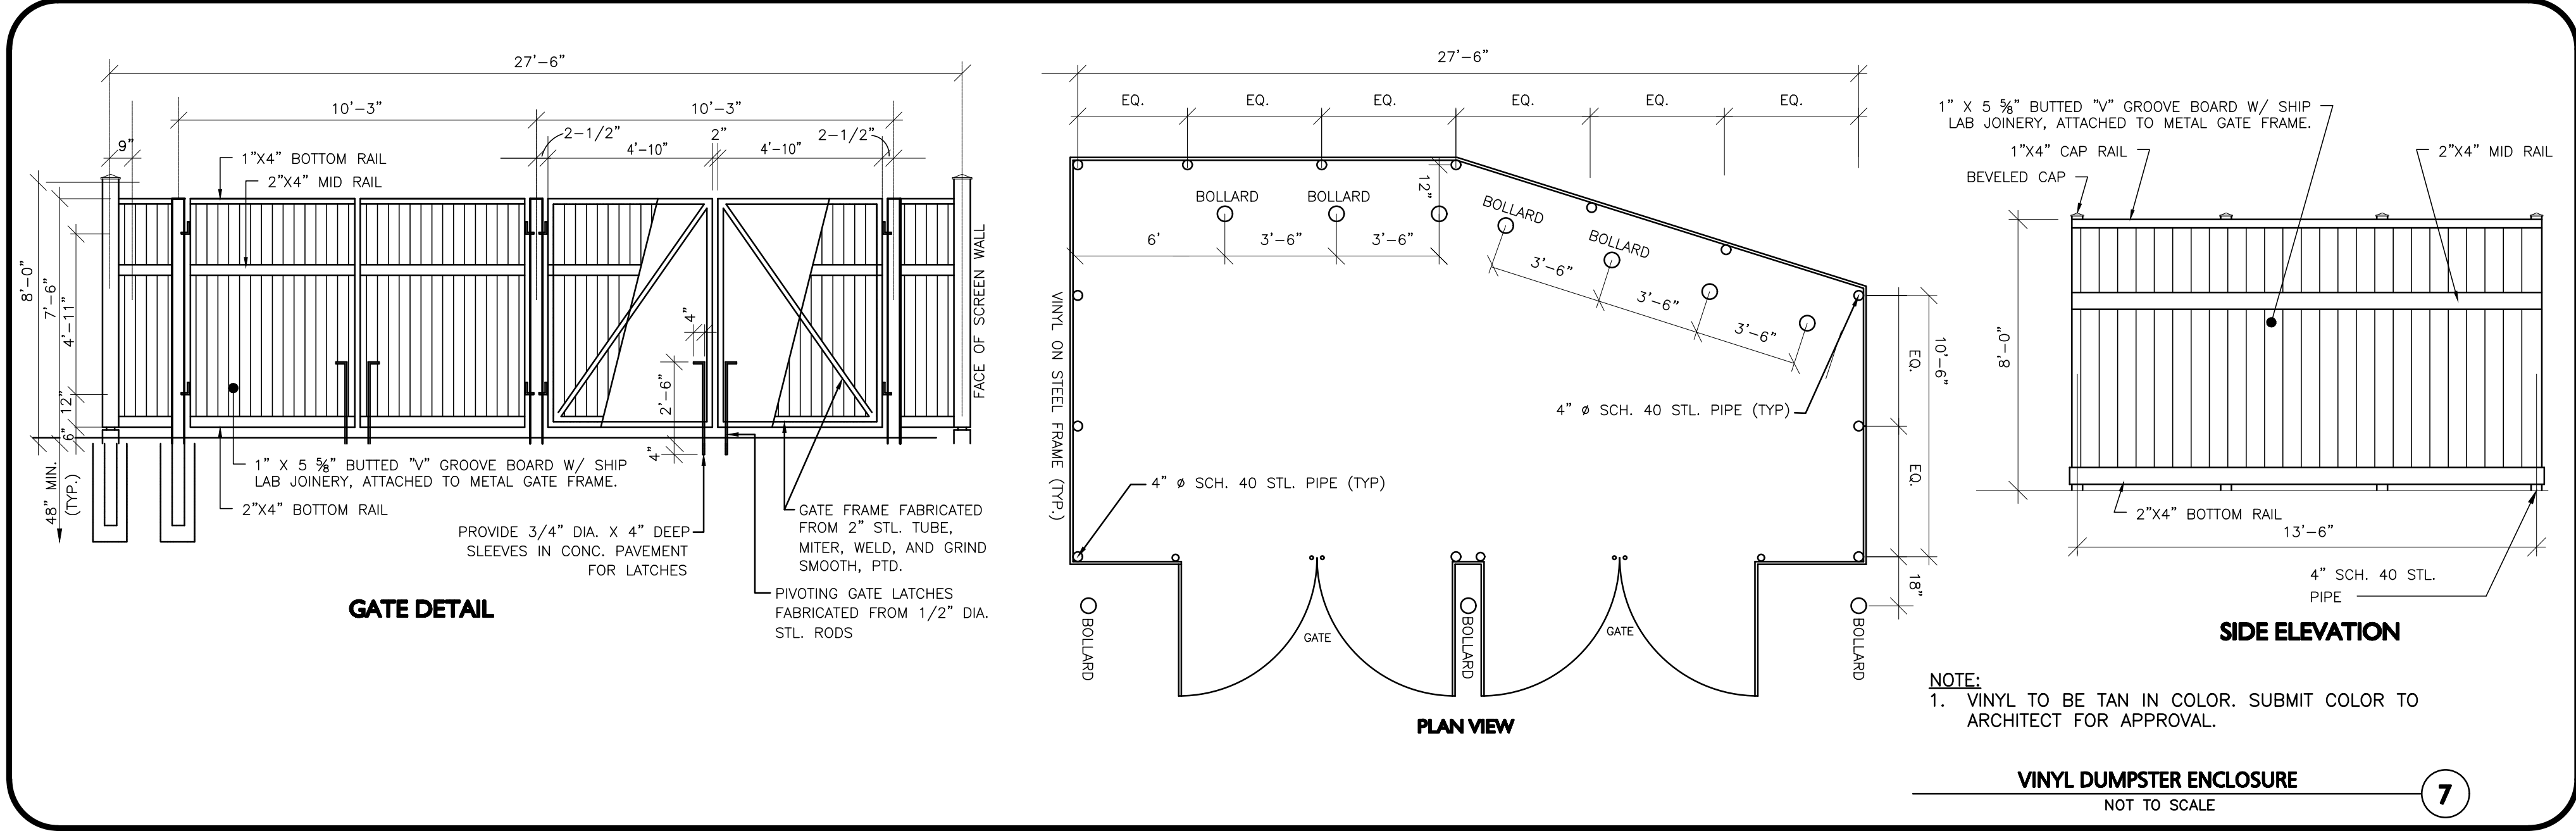

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

REV	DATE	DESCRIPTION
2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB

APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO. 2729-01 DATE: 04-10-20

SCALE: AS SHOWN DWG. NAME: C272901

DESIGNED BY: ARM CHECKED BY: BDJ/RC


PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896


THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE: DETAILS SHEET No. C-503

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

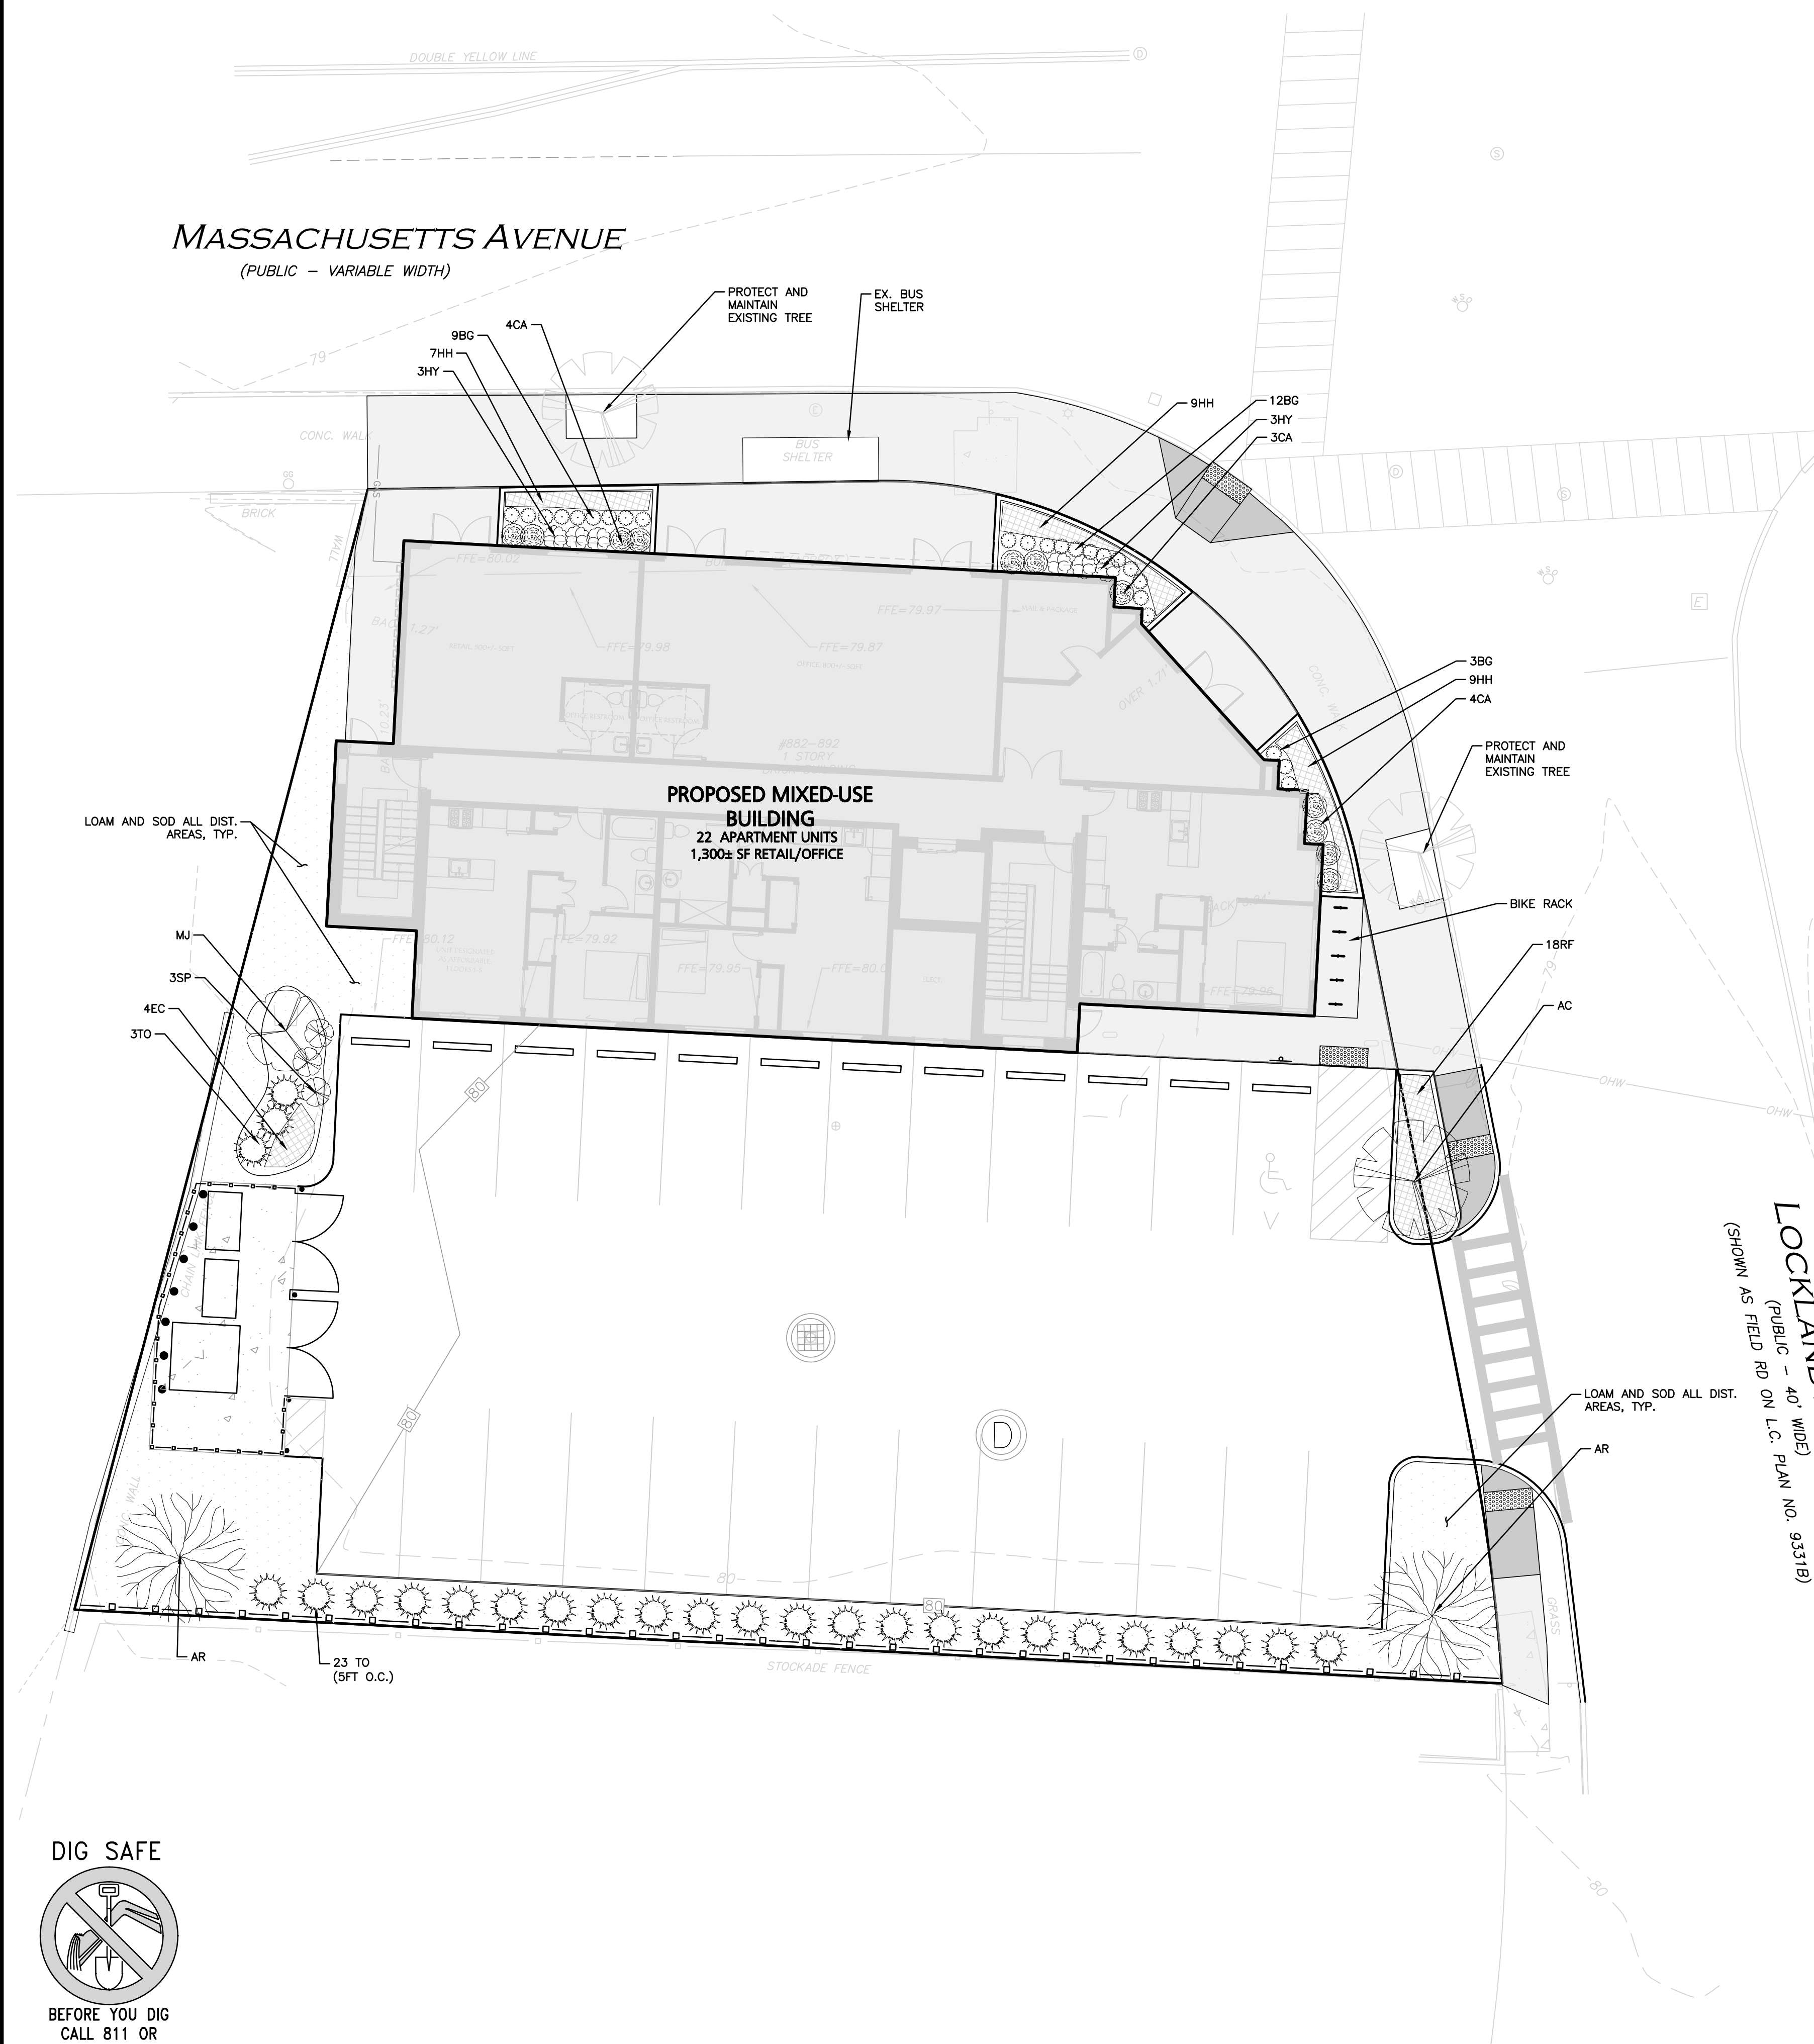


LEGEND	
DECIDUOUS TREE	
EVERGREEN TREE	
FLOWERING TREE	
SHRUBS	
MULCH BED	
PERENNIALS/GROUNDCOVER	
WILDFLOWER SEED MIX	
EROSION CONTROL SEED MIX	

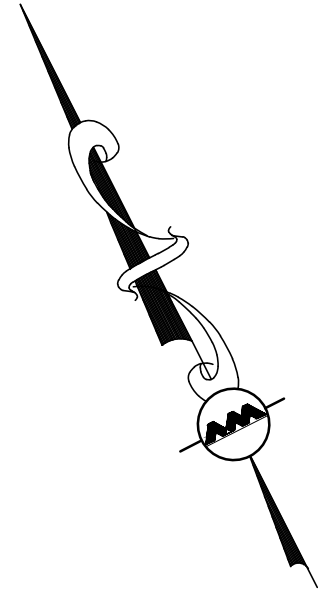

PLANTING SCHEDULE-TREES, SHRUBS, GROUNDCOVERS & PERENNIALS

KEY	QUANTITY	BOTANICAL NAME	COMMON NAME	MIN. SIZE	SPACING	COMMENTS
EVERGREEN TREES						
TO	26	THUJA O. 'WINTERGREEN'	WINTERGREEN ARBORVITAE	6-7' HT	AS SHOWN	B&B
FLOWERING TREES						
AC	1	AMELANCHIER CANADENSIS	SHADBLOW SERVICEBERRY	2.5-3" CAL.	AS SHOWN	B&B
AR	2	ACER RUBRUM 'BOWHALL'	BOWHALL RED MAPLE	2.5-3" CAL.	AS SHOWN	B&B
MJ	1	MAGNOLIA LILIFLORA 'JANE'	JANE MAGNOLIA	5-6' HT.	AS SHOWN	B&B
SHRUBS						
CA	11	CORNUS ALBA 'IVORY HALO'	IVORY HALO DOGWOOD	#3	AS SHOWN	POT
BG	24	BUXUS 'GREEN MOUNTAIN'	GREEN MOUNTAIN BOXWOOD	#2	AS SHOWN	POT
HY	6	HYDRANGEA ARBORESCENS 'INCREDIBALL'	INCREDIBALL HYDRANGEA	#5	AS SHOWN	POT
SP	3	SYRINGA PATULA 'MISS KIM'	MISS KIM LILAC	#5	AS SHOWN	POT
PERENNIALS						
EC	4	ECHINACEA PURPUREA 'KIMS KNEEHIGH'	KIMS KNEEHIGH CONEFLOWER	#1	24" O.C	STAGGERED
HH	25	HOSTA 'HADSPEN BLUE'	HADSPEN BLUE HOSTA	#1	24" O.C	STAGGERED
RF	18	RUDBECKIA FULGIDA 'CITY GARDEN'	CITY GARDEN BLACK EYED SUSAN	#1	24" O.C.	STAGGERED

LOCKLAND AVE
(PUBLIC - 40' WIDE)
(SHOWN AS FIELD RD ON L.C. PLAN NO. 9331B)

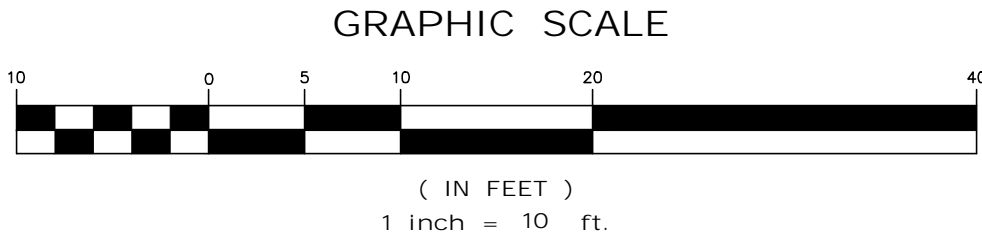

REGISTERED LANDSCAPE ARCHITECT FOR ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO. 2729-01 DATE: 04-10-20

SCALE: 1" = 10' DWG. NAME: C2729-01

DESIGNED BY: BCD CHECKED BY: BDJ/RC

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896
WOBBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CLIENTS REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE: LANDSCAPE PLAN	SHEET No. L-101
----------------------------------	--------------------

LOAM AND SODDING NOTES

CONTRACTOR SHALL SOD AREAS NOTED ON THE PLANS.

SOD IS TO BE A BLEND OF FOUR TO FIVE CURRENT AND IMPROVED HYBRID BLUEGRASS AND FESCUE MIXES APPROPRIATE FOR BOTH SEMI-SHADED AND AREAS OF SUN.

HYBRIDS MAY INCLUDE: BLACKSTONE KENTUCKY BLUEGRASS, AWARD KENTUCKY BLUEGRASS, CHALLENGER KENTUCKY BLUEGRASS, BLACKBURG II KENTUCKY BLUEGRASS OR COMPARABLE AND EQUAL BLUEGRASS HYBRIDS.

1. SOD SHALL BE HIGH QUALITY, NURSERY GROWN ON CULTIVATED MINERAL AGRICULTURAL SOILS. SOD SHALL BE MOIST, AND MACHINE CUT AT A UNIFORM SOIL THICKNESS OF AT LEAST ¾" AT TIME OF CUTTING. MEASUREMENT FOR THICKNESS SHALL INCLUDE TOP GROWTH AND THATCH. SOD SHALL BE FREE OF DISEASES, WEEDS, BARE SPOTS, OR INSECTS.

2. SODDING TO BE COMPLETED "IN SEASON" BETWEEN APRIL 1 TO JUNE 15 OR AUGUST 15 TO OCTOBER 1, EXCEPT FOR RE-SODDING OF BARE SPOTS. IF UNABLE TO SOD WITHIN THESE TIMEFRAMES, CONTRACTOR TO INSTALL EROSION CONTROL MATS ON ALL SLOPES 3:1 AND OVER, HYDROSEED ALL EXPOSED AREAS, ADD SOIL STABILIZER "FLUX TERRA HP-FGM SOIL STABILIZER" AS MANUFACTURED BY "PROFILE" TO HYDROSEED (AT RATE OF 3,000 LBS PER ACRE), AT NO ADDITIONAL COST TO THE OWNER. CONTRACTOR TO COMPLETE ALL ABOVE "OUT OF SEASON" REQUIREMENTS AND THEN ALSO BE RESPONSIBLE FOR RE-GRADING AND RE-SODDING ALL DISTURBED, ERODED, OR BARE SPOTS WITHIN NEXT CLOSEST PLANTING SEASON IN FALL OR SPRING AT NO ADDITIONAL COST TO OWNER. CONTRACTOR RESPONSIBLE FOR ALL MAINTENANCE UNTIL FINAL ACCEPTANCE OF LAWN AREAS INCLUDING: WATERING, ADDING FERTILIZERS AND LIME AND MOWING AT NO ADDITIONAL COST TO OWNER.

3. COMMERCIAL FERTILIZER SHALL BE APPLIED AT THE RATE OF 25 POUNDS PER 1000 SQ. FT. OR AS RECOMMENDED BY THE TESTING AGENCY. LIME TO BE SPREAD AT THE RATE OF 100 POUNDS PER 1000 SQ. FT. OR AS RECOMMENDED BY THE TESTING AGENCY. COMMERCIAL FERTILIZER SHALL BE A COMPLETE FERTILIZER CONTAINING AT LEAST 50% OF THE NITROGEN OF WHICH IS DERIVED FROM NATURAL ORGANIC SOURCES OF UREAFORM. IT SHALL CONTAIN THE FOLLOWING PERCENTAGES BY WEIGHT: NITROGEN (N) 10%, PHOSPHORUS (P) 6%, POTASH (K) 4%. LIME SHALL BE AN APPROVED AGRICULTURAL LIMESTONE CONTAINING NOT LESS THAN 85% OF TOTAL CARBONATES. LIMESTONE SHALL BE GROUND TO SUCH FINENESS THAT 50% WILL PASS A 100 MESH SIEVE AND 90% WILL PASS THROUGH A 20 MESH SIEVE.


4. CONTRACTOR RESPONSIBLE FOR WATERING, MOWING, AND RE-SODDING OF LAWN BARE SPOTS UNTIL A UNIFORM, HEALTHY STAND OF GRASS IS ESTABLISHED AND ACCEPTED.

LANDSCAPE NOTES

- ALL WORK SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE TOWN OF ARLINGTON, MA.
- PLANTING PLAN IS DIAGRAMMATIC IN NATURE. FINAL PLACEMENT OF PLANTS TO BE APPROVED BY THE LANDSCAPE ARCHITECT IN THE FIELD.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING ALL UTILITY COMPANIES, ANY PERMITTING AGENCIES, AND "DIG-SAFE" (1-888-344-7233) AT LEAST 72 HOURS IN ADVANCE OF ANY WORK THAT WILL REQUIRE EXCAVATION. CONTRACTOR SHALL NOTIFY THE OWNERS REPRESENTATIVE OF ANY CONFLICTS IN WRITING.
- NO PLANT MATERIAL SHALL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA, ANY TREES NOTED AS "SEAL OR SELECTED SPECIMEN" SHALL BE TAGGED AND SEALED BY THE LANDSCAPE ARCHITECT.
- ALL TREES SHALL BE BALLED AND BURLAPPED (B&B) UNLESS OTHERWISE NOTED OR APPROVED BY THE OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT.
- CONTRACTOR SHALL VERIFY QUANTITIES SHOWN ON PLANT LIST. QUANTITIES SHOWN ON PLANS SHALL GOVERN OVER PLANT LIST.
- ANY PROPOSED PLANT SUBSTITUTIONS MUST BE APPROVED IN WRITING BY OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT.
- ALL PLANT MATERIALS INSTALLED SHALL MEET THE GUIDELINES ESTABLISHED BY THE STANDARDS FOR NURSERY STOCK PUBLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMEN.
- ALL PLANT MATERIALS SHALL BE GUARANTEED FOR ONE YEAR FOLLOWING DATE OF ACCEPTANCE.

LANDSCAPE NOTES CONT.

- ALL DISTURBED AREAS NOT OTHERWISE NOTED SHALL RECEIVE 6" OF SUITABLE LOAM & SEED LAWNS WITH 3:1 OR GREATER SLOPES SHALL BE PROTECTED WITH AN EROSION CONTROL BLANKET.
- ANY FALL TRANSPLANTING HAZARD PLANTS SHALL BE DUG IN THE SPRING AND STORED FOR FALL PLANTING.
- TREES SHALL HAVE A MINIMUM CALIPER AS INDICATED ON THE PLANTING SCHEDULE TAKEN ONE FOOT ABOVE THE ROOT CROWN.
- ALL PLANT BEDS AND TREE SAUCERS TO RECEIVE 3" OF PINE BARK MULCH. GROUND COVER AREAS SHALL RECEIVE 1" OF PINE BARK MULCH
- ALL DECIDUOUS TREES ADJACENT TO WALKWAYS AND ROADWAYS SHALL HAVE A BRANCHING PATTERN TO ALLOW FOR A MINIMUM OF 7' OF CLEARANCE BETWEEN THE GROUND AND THE LOWEST BRANCH.
- ALL TREE STAKES SHALL BE STAINED DARK BROWN.
- CONTRACTOR RESPONSIBLE FOR WATERING, AND RESEEDING OF BARE SPOTS UNTIL A UNIFORM STAND OF VEGETATION IS ESTABLISHED AND ACCEPTED.
- ALL PARKING ISLANDS PLANTED WITH SHRUBS SHALL HAVE 24" OF TOP SOIL. FINISH GRADE SHALL BE EQUAL TO THE TOP OF CURB.
- SOIL SAMPLES, TESTS, AND SHOP DRAWINGS SHALL BE PROVIDED TO THE LANDSCAPE ARCHITECT OR THE OWNER FOR APPROVAL PRIOR TO CONSTRUCTION.
- AN MINIMUM 18" WIDE BARRIER OF 1" GRAY OR TAN PEASTONE SHALL BE INSTALLED IN ALL PLANT BEDS WHICH ABUT THE BUILDINGS. NO MULCH IS ALLOWED WITHIN 18" OF ALL BUILDINGS PER THE LATEST EXECUTIVE OFFICE OF PUBLIC SAFETY AND SECURITY DEPARTMENT OF FIRE SERVICES REGULATION (527 CMR 17.00). INSTALL 6" DEEP OF PEASTONE WITH MIRAFI WEED FABRIC BENEATH AND STEEL EDGING BETWEEN THE PEASTONE AND ADJACENT MULCH BED.
- ALL PROPOSED LANDSCAPE AREAS INCLUDING MOWED LAWNS, TREES, SHRUB BEDS, AND PERENNIALS SHALL BE PROVIDED WITH WATER EFFICIENT UNDERGROUND IRRIGATION. DESIGN AND INSTALLATION OF IRRIGATION SYSTEM TO BE PERFORMED BY AN APPROVED IRRIGATION DESIGN BUILD CONTRACTOR OR BY AN APPROVED EQUAL, TO BE DETERMINED BY THE OWNERS REPRESENTATIVE AND LANDSCAPE ARCHITECT. IRRIGATION SYSTEM IS TO BE DESIGNED FOR EFFICIENT WATER USAGE INCLUDING: USE OF DRIP IRRIGATION FOR SHRUBS AND PERENNIALS, IRRIGATION SYSTEM WITH HEAD-TO-HEAD COVERAGE, A CENTRAL SHUT-OFF VALVE, AND A RAIN SENSOR TO SHUT OFF IRRIGATION DURING RAIN EVENTS.

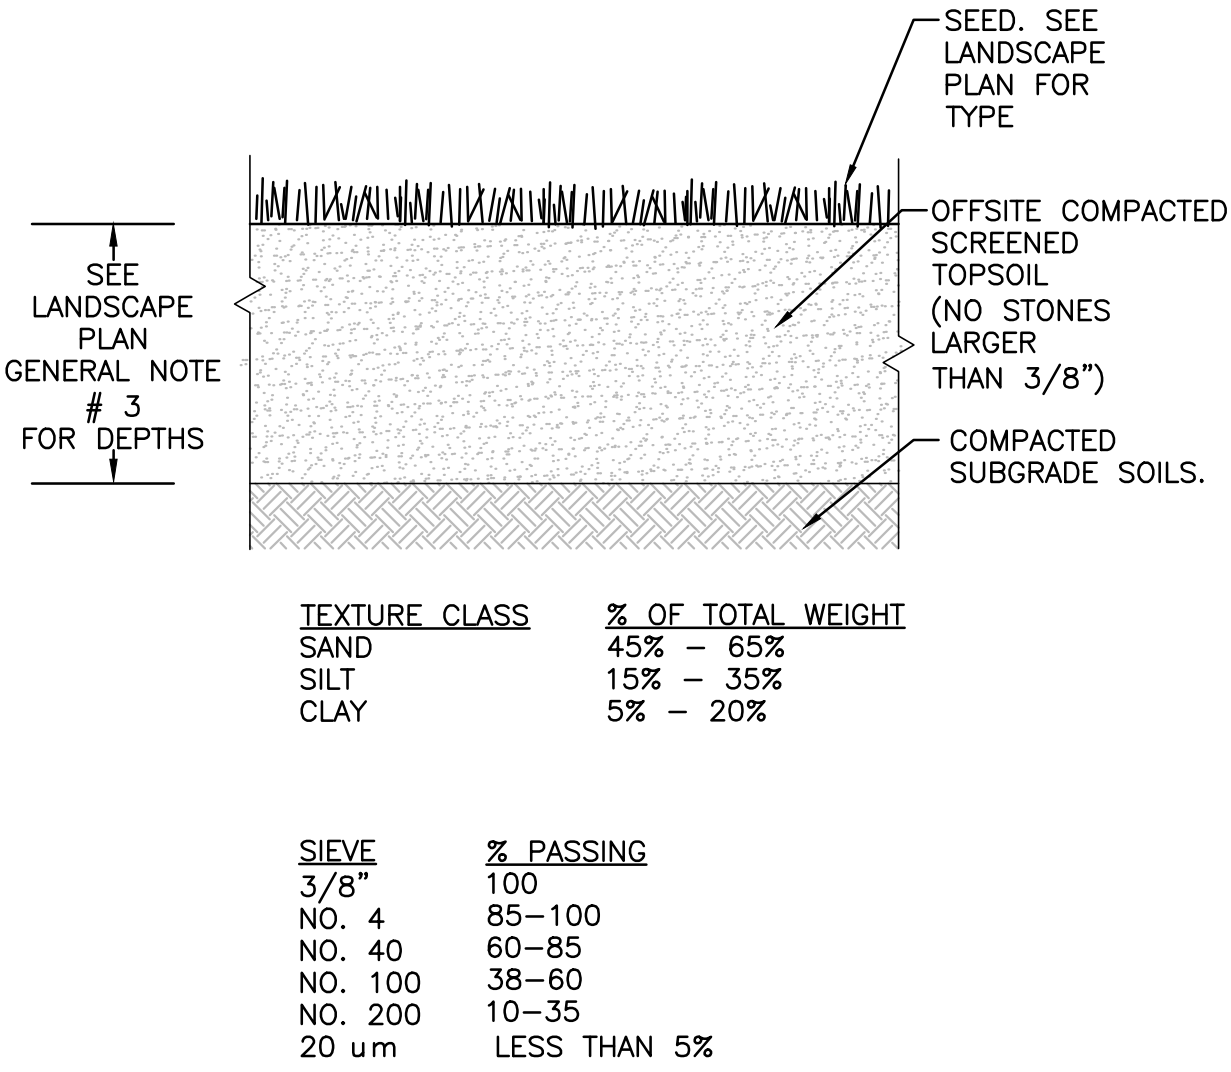


NOTES:

- TOP OF LOAM (TOPSOIL) IS FINISH GRADE.
- ALL TOPSOIL (BOTH ONSITE AND OFFSITE SOURCES) SHALL BE COMPOSED OF A NATURAL, FERTILE, FRIABLE SOIL TYPICAL OF CULTIVATED TOPSOILS OF THE LOCALITY. OFFSITE SOIL SHALL BE SUITABLE FOR THE GERMINATION OF SEEDS AND SUPPORT OF VEGETATIVE GROWTH, WITH ADDITIVES, IF REQUIRED, TO ACHIEVE PARTICLE DISTRIBUTION AND ORGANIC CONTENT BELOW. TOPSOIL SHALL BE TAKEN FROM A WELL-DRAINED, ARIABLE SITE, FREE OF SUBSOIL, LARGE STONES, EARTH CLOUDS, STICKS, STUMPS, CLAY LUMPS, ROOTS, OTHER OBJECTIONABLE, EXTRANEIOUS MATTER OR DEBRIS NOR CONTAIN TOXIC SUBSTANCES.
- THE CONTRACTOR SHALL PROVIDE THE OWNER / LANDSCAPE ARCHITECT WITH TOPSOIL TEST RESULTS (RECOMMEND UMASS AMHERST SOIL TESTING LAB) FOR APPROVAL PRIOR TO OBTAINING AND PLACING THE SOIL. IF ANY TOPSOIL IS PURCHASED OR PLACED PRIOR TO APPROVAL BY OWNER / LANDSCAPE ARCHITECT, IT IS AT CONTRACTORS RISK, AND IT CAN BE REMOVED AT NO ADDITIONAL COST TO THE OWNER. IF THE PLANTING SOIL (BOTH ONSITE AND OFFSITE SOURCES) DOES NOT FALL WITHIN THE REQUIRED SIEVE ANALYSIS, TEXTURAL CLASS, ORGANIC CONTENT, OR PH RANGE, IT SHALL BE ADJUSTED TO MEET THE SPECIFICATIONS THROUGH THE ADDITION OF SAND, COMPOST, LIMESTONE, OR ALUMINUM SULFATE TO BRING IT WITHIN THE SPECIFIED LIMITS AT NO ADDITIONAL COST TO THE OWNER.
- TOPSOIL SHALL HAVE A PH VALUE BETWEEN 5.5 AND 6.5. TOPSOIL SHALL CONTAIN BETWEEN 4% AND 8% ORGANIC MATTER OF TOTAL DRY WEIGHT AND SHALL CONFORM TO THE FOLLOWING GRADATION AND TEXTURE CLASS ABOVE.

TOPSOIL FOR LAWN, TREES, SHRUBS, & PERENNIALS

NOT TO SCALE


2

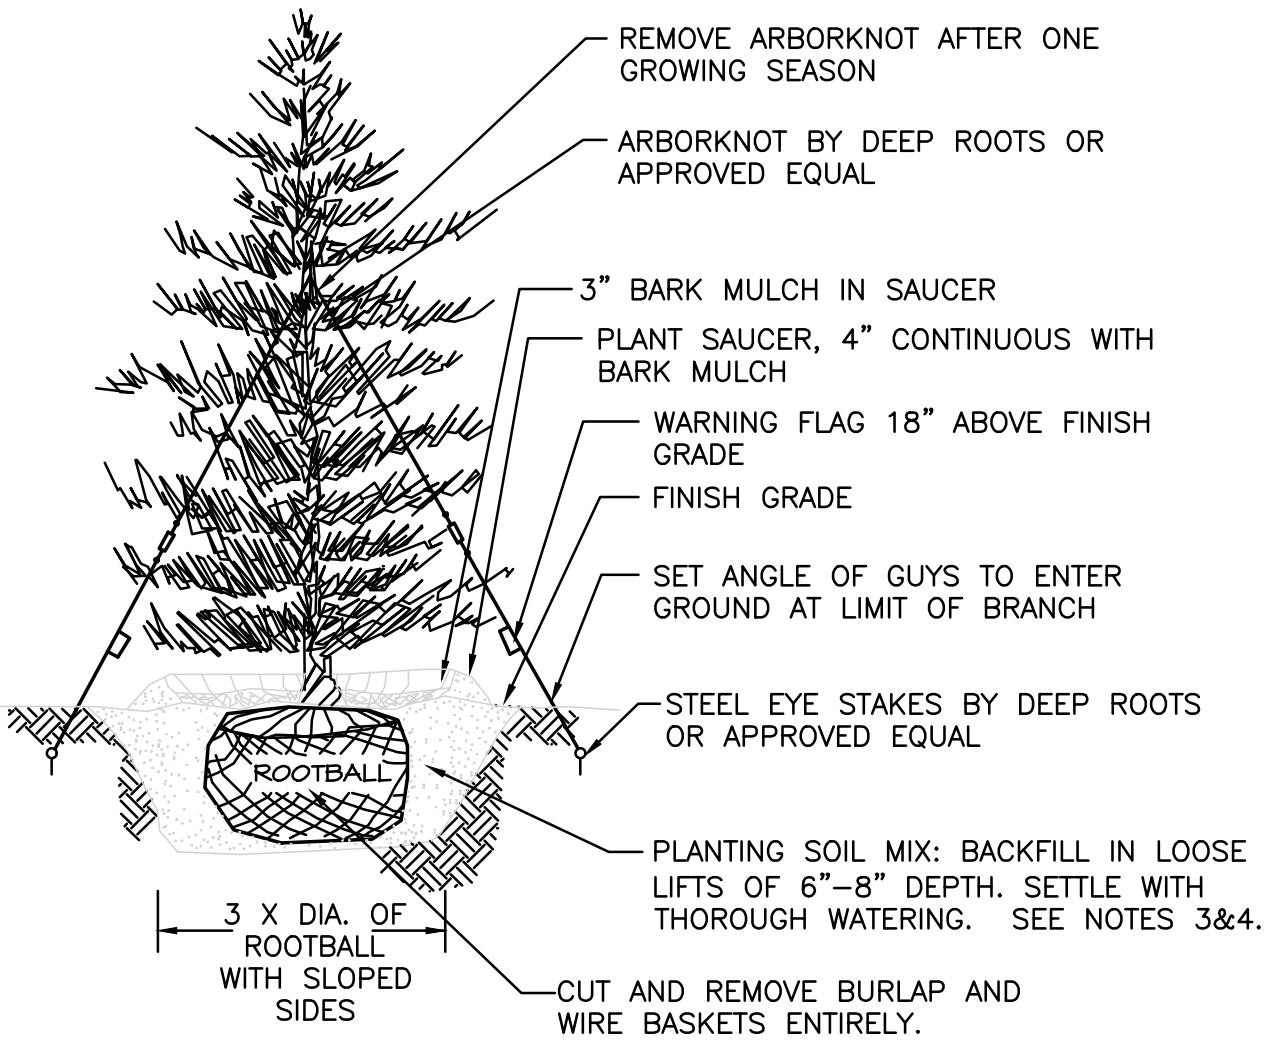

EVERGREEN TREE DETAIL

NOT TO SCALE

1

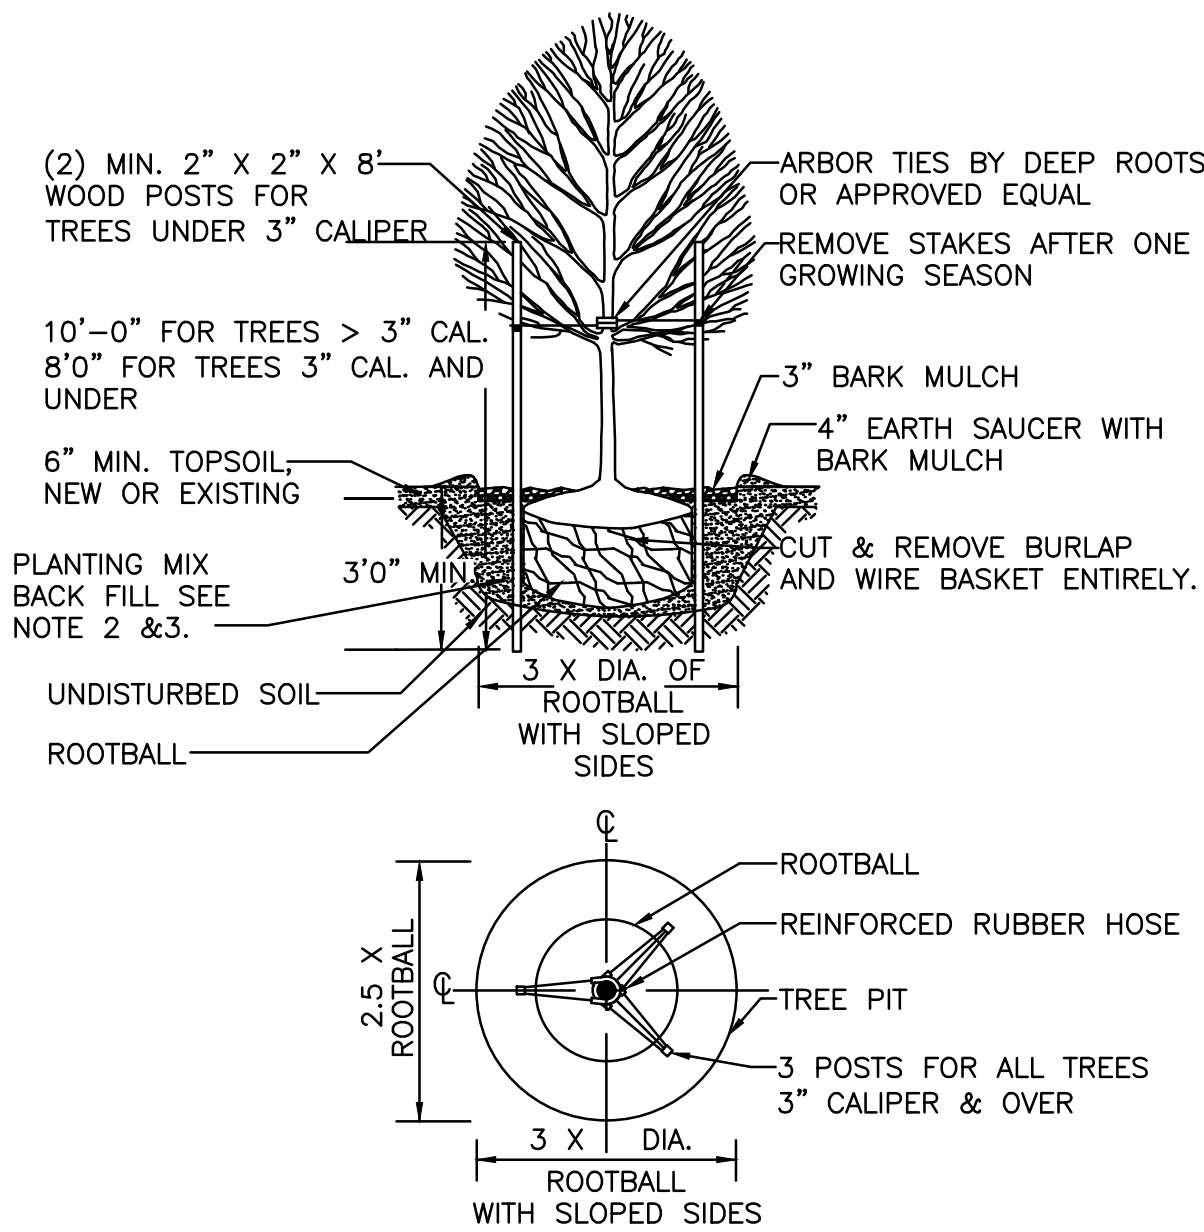

DECIDUOUS TREE PLANTING DETAIL

NOT TO SCALE


3

NOTES

- TREES SHALL BEAR SAME RELATIONSHIP TO FINISH GRADE AS IT BORE TO NURSERY OR FIELD GRADE. ROOT FLARE SHALL BE 2" ABOVE FINISH GRADE. REMOVE SOIL FROM TRUNK FLARE OF TREE TO DETERMINE ACTUAL TOP OF ROOTBALL AREA.
- INSTALL THREE GUYS PER TREE; EQUALLY SPACED AROUND BALL.
- ATTACH GUYS AT 2/3 HEIGHT OF TREE.
- BACKFILL WITH PLANTING MIX. PLANT MIX TO BE: 50% NATIVE TOPSOIL, 20% COMPOST (LEAVES & ORGANIC MATERIAL, NO ASH) 20% PEAT MOSS, 10% SAND.
- ADD MYCORRHIZA SOIL ADDITIVES AND SLOW RELEASE FERTILIZER WHEN PLANT HOLES ARE 50% FILLED AND WATER THOROUGHLY AT COMPLETION.


NOTES:

- ALL TREES SHALL HAVE THE SAME RELATIONSHIP TO FINISH GRADE AFTER PLANTING AS THEY HAD AT THE ORIGINAL NURSERY SETTING. ROOT FLARE SHALL BE 2" ABOVE FINISH GRADE. REMOVE SOIL FROM TRUNK FLARE OF TREE TO DETERMINE ACTUAL ROOTBALL AREA.
- BACKFILL WITH PLANTING MIX. PLANT MIX TO BE: 50% NATIVE TOPSOIL, 20% COMPOST (LEAVES & ORGANIC MATERIAL, NO ASH) 20% PEAT MOSS, 10% SAND.
- ADD MYCORRHIZA SOIL ADDITIVES AND SLOW RELEASE FERTILIZER WHEN PLANT HOLES ARE 50% FILLED AND WATER THOROUGHLY AT COMPLETION.

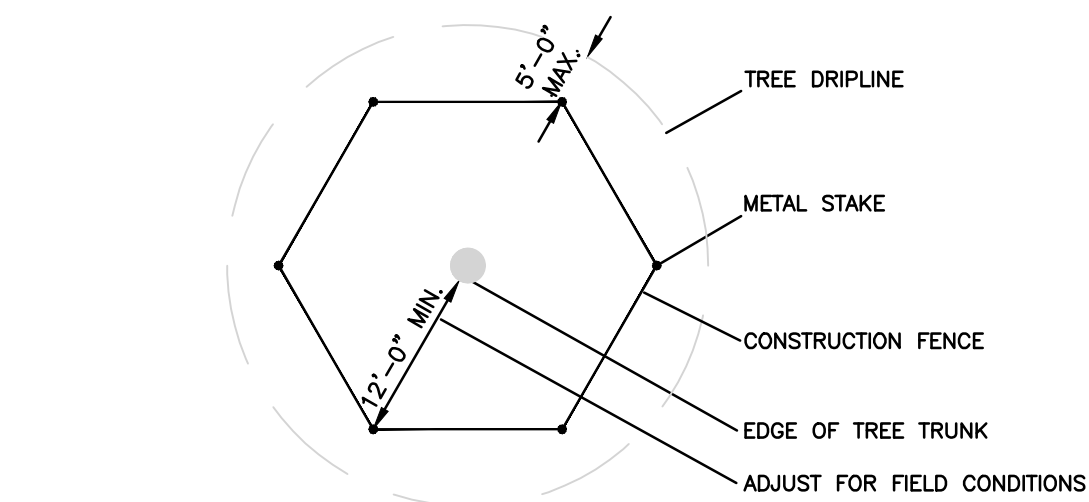

NOTE:

- CONSTRUCTION FENCE TO BE "VISUAL BARRIER FENCE" AS MANUFACTURED BY EXXON CHEMICAL COMPANY ATLANTA, GA; "KONTROL SAFETY FENCE" AS MANUFACTURED BY MIRAFI, CHARLOTTE, N.C. OR APPROVED EQUAL.
- IF GROUPS OF TREES ARE TO BE PROTECTED, EXTEND FENCE AROUND PERIMETER TO CONFORM TO MINIMUM DIMENSIONS FOR TREE TRUNKS AND DRIPLINE.

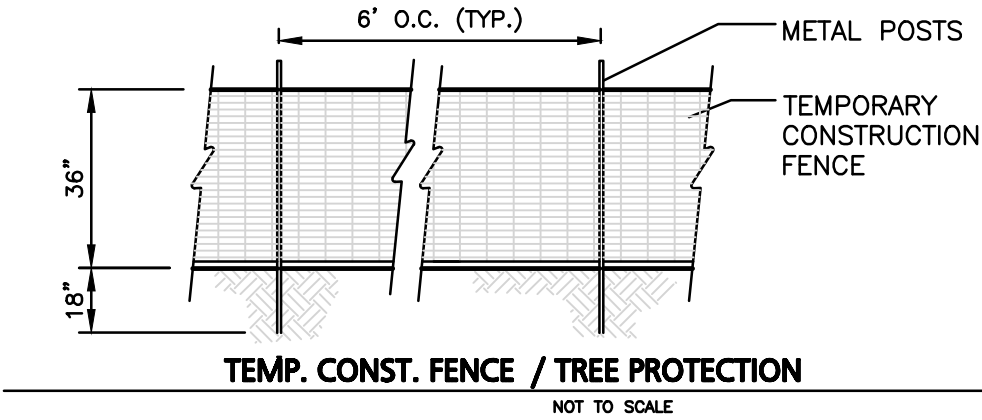


TEMP. CONST. FENCE / TREE PROTECTION

NOT TO SCALE

4

NOTES:

- ALL SHRUBS SHALL HAVE THE SAME RELATIONSHIP TO FINISH GRADE AFTER PLANTING AS THEY HAD AT THE ORIGINAL NURSERY SETTING. SET SHRUB 1"-2" ABOVE FINISH GRADE.
- BACKFILL WITH PLANTING MIX. PLANT MIX TO BE: 50% NATIVE TOPSOIL, 20% COMPOST (LEAVES & ORGANIC MATERIAL, NO ASH) 20% PEAT MOSS, 10% SAND.
- ADD MYCORRHIZA SOIL ADDITIVES AND SLOW RELEASE FERTILIZER WHEN PLANT HOLES ARE 50% FILLED AND WATER THOROUGHLY AT COMPLETION.
- SHRUB BEDS TO HAVE 24" MIN. OF CONTINUOUS PLANTING SOIL.

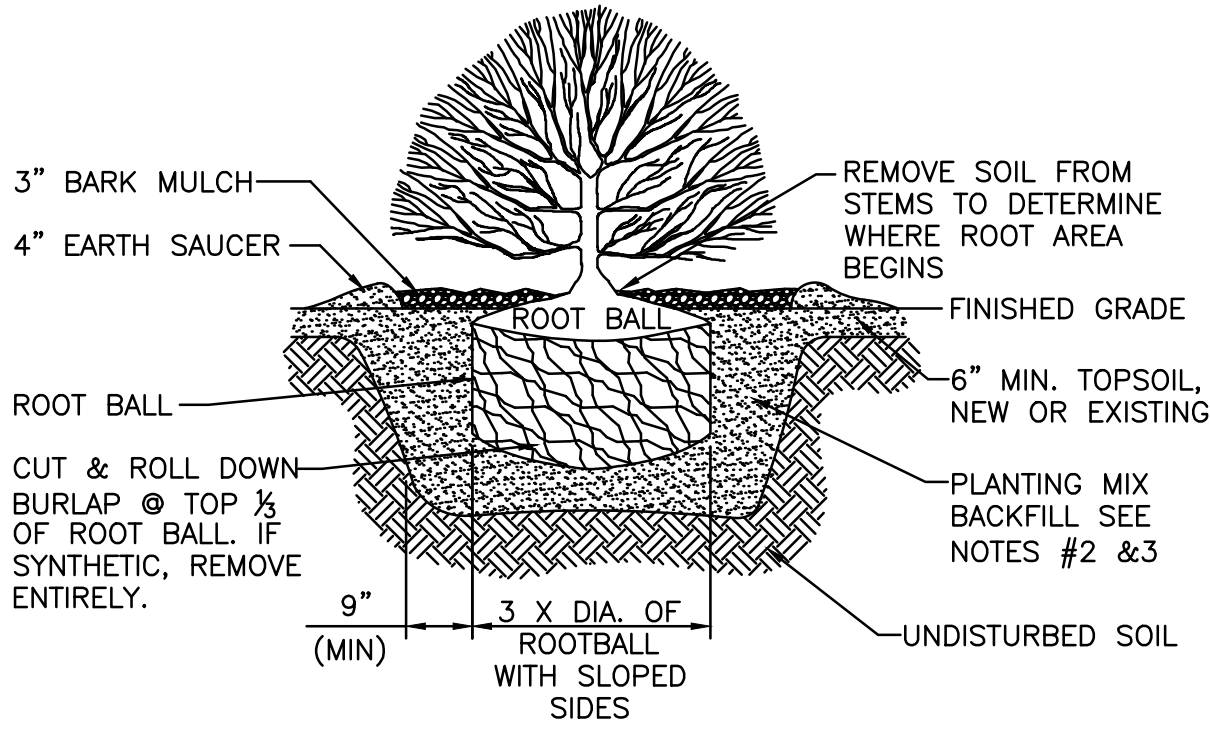


SHRUB PLANTING DETAIL


NOT TO SCALE

5

DIG SAFE



BEFORE YOU DIG
CALL 811 OR
1-888-DIG-SAFE
1-888-344-7233



REGISTERED LANDSCAPE ARCHITECT FOR
ALLEN & MAJOR ASSOCIATES, INC.

2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB
REV	DATE	DESCRIPTION

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
-------------	---------	-------	----------

SCALE:	NTS	DWG. NAME:	C2729-01
--------	-----	------------	----------

DESIGNED BY:	BCD	CHECKED BY:	BDJ/RC
--------------	-----	-------------	--------

PREPARED BY:

ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896
WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH


THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/Clients REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
----------------	-----------

LANDSCAPE DETAILS

L-501

Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved








ARLINGTON MIXED USE

882-892 MASS AVE
ARLINGTON, MA

<p>Title: OVERALL PLAN – BASEMENT</p> <p>A1.01</p>	Scale:	1/4" = 1'-0"	Revisions:	
	Drawn By:	PPS/LS	#	Description
	Checked By:	ALW		Date
	Project No.:	2020004		
	Date:	07/06/20		

NOTE: SEE CIVIL FOR SITEWORK

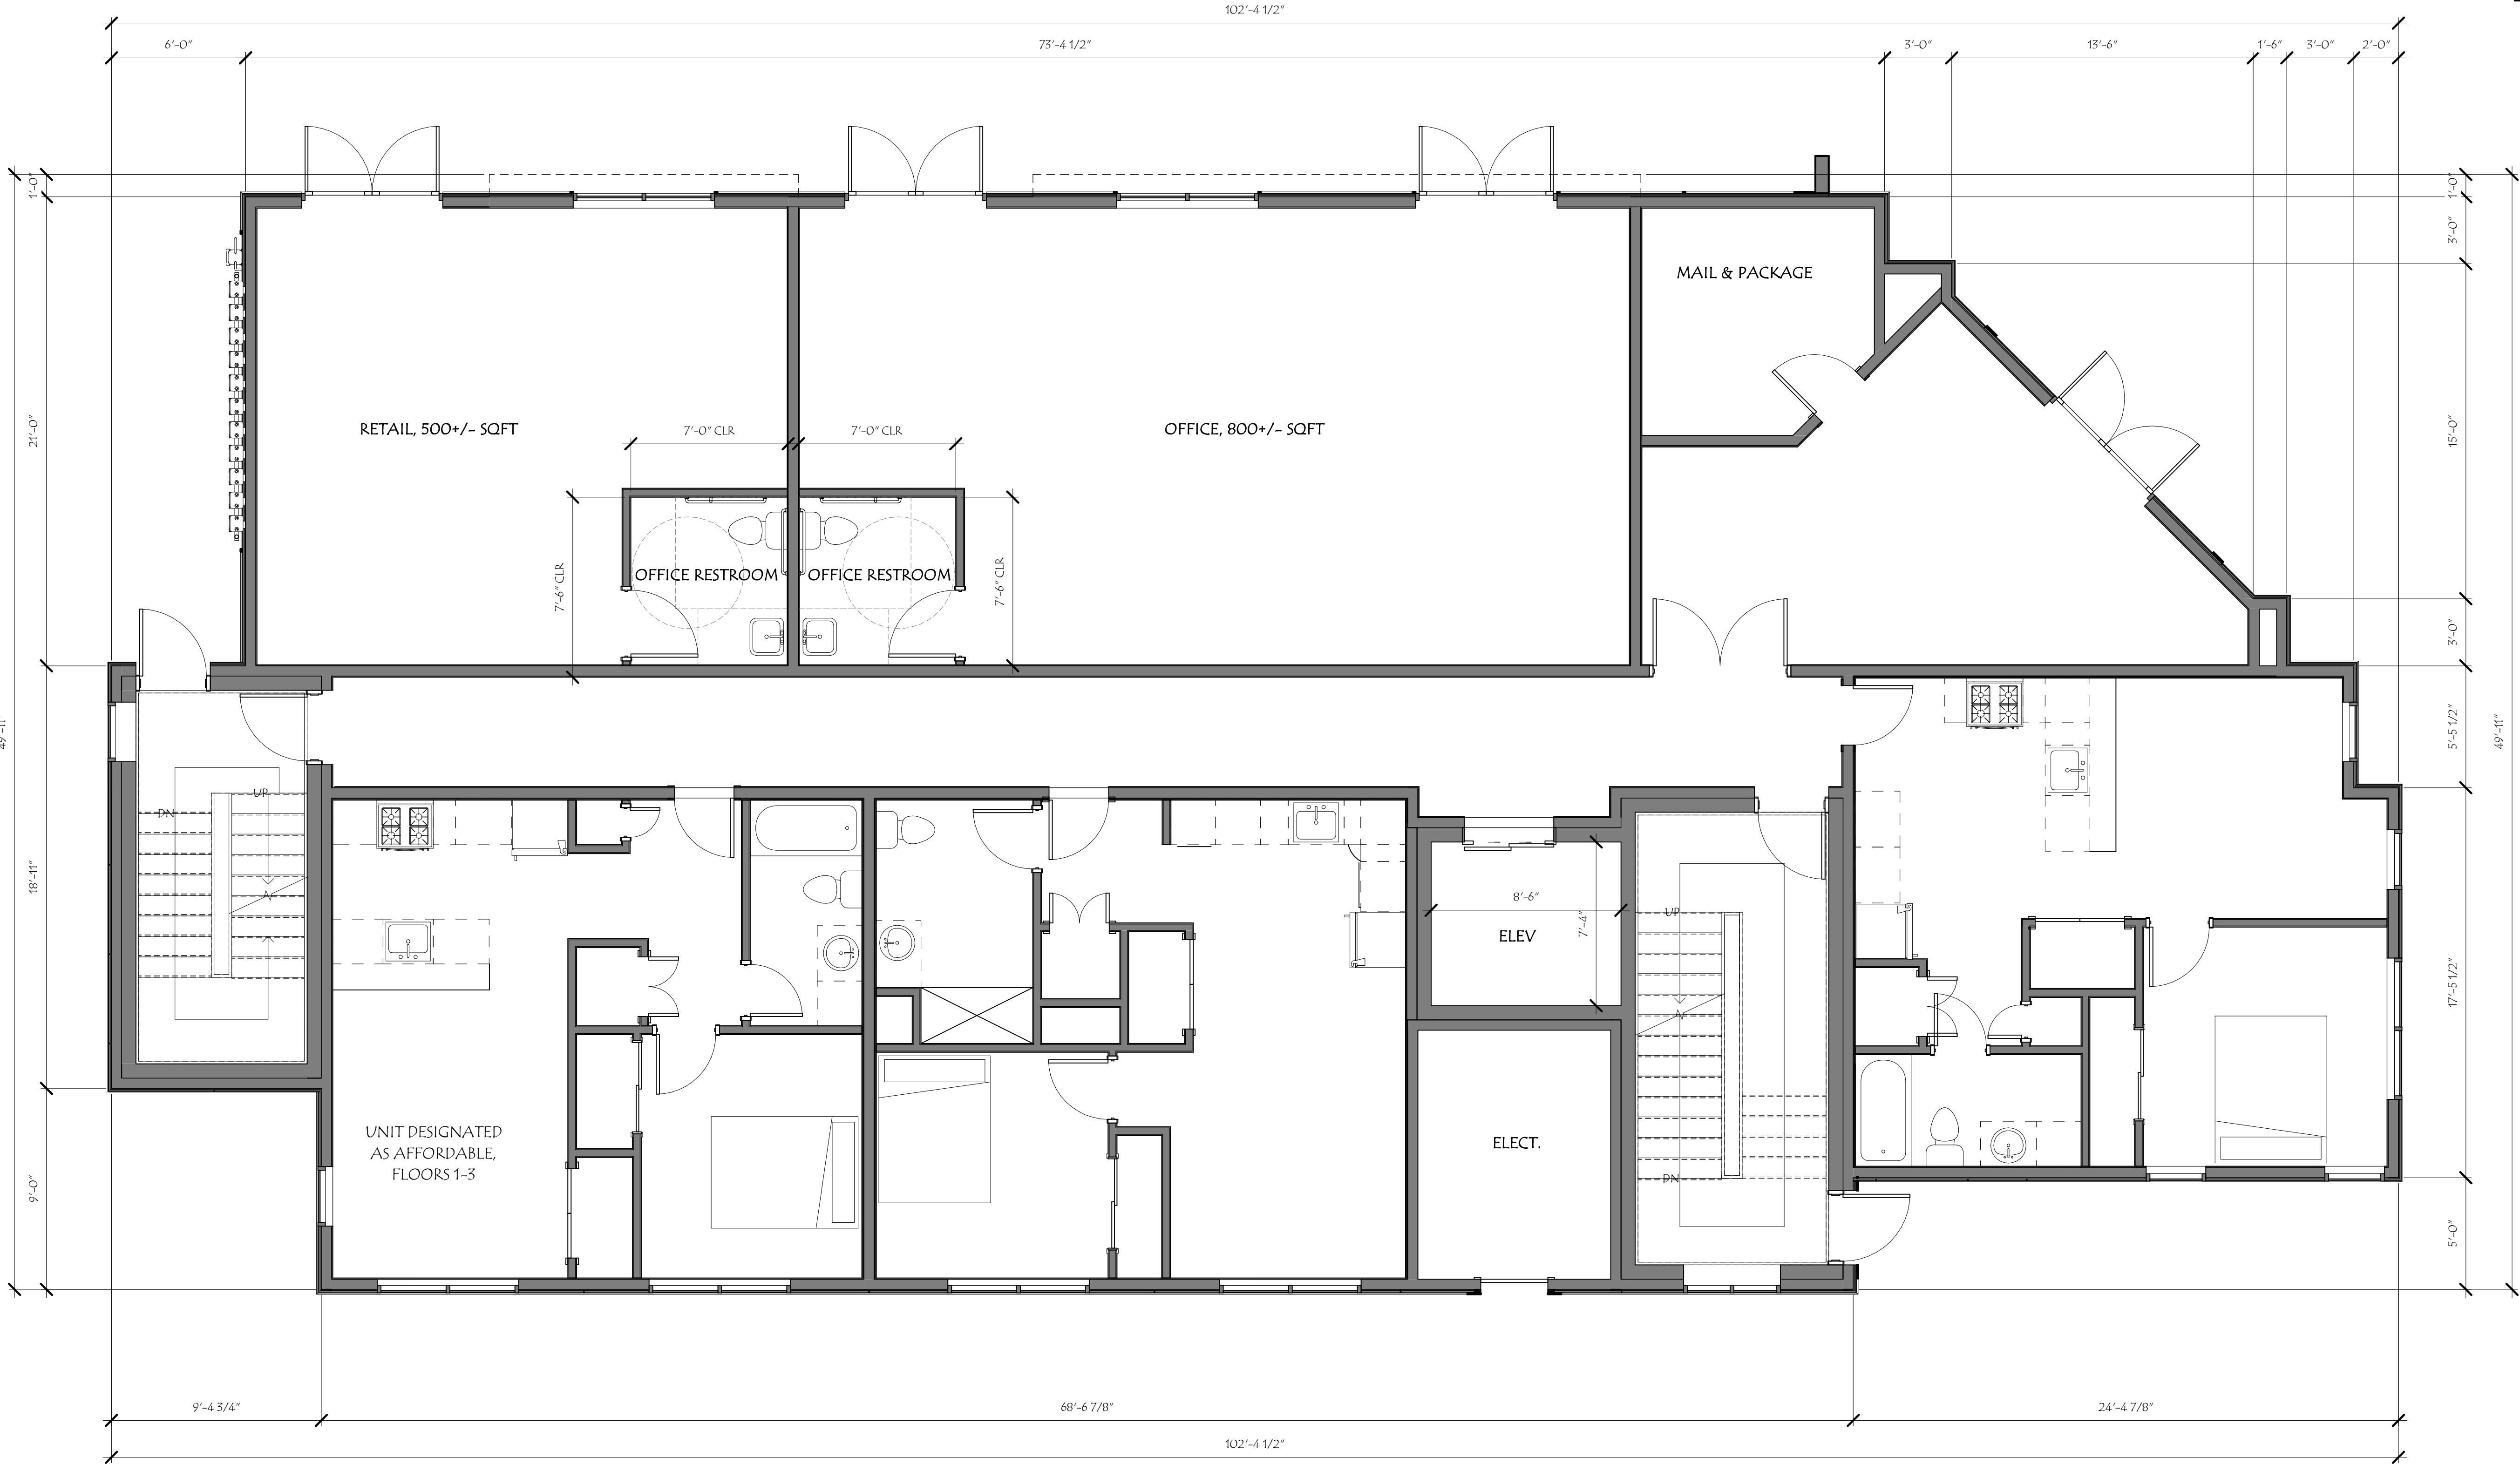

1 1ST FLOOR
1/4" = 1'-0"

ARLINGTON MIXED USE

882-892 MASS AVE
ARLINGTON, MA

NOT FOR
CONSTRUCTION



Revisions:	Date
#	Description

1/4" = 1'-0"	PPS/LS	ALW
Scale:	Drawn By:	Checked By:
Project No.:	20200004	07/06/20
Date:	6/25/2020 5:47:57 PM	

Title:
OVERALL PLAN -
FIRST FLOOR

A1.02




Scale:	1/4" = 1'-0"	Revisions:	Date
Drawn By:	PPS/LS	#	Description
Checked By:	ALW		
Project No.:	20200004		
Date:	07/06/20		

ARLINGTON MIXED USE

882-892 MASS AVE
ARLINGTON, MA

NOT FOR
CONSTRUCTION

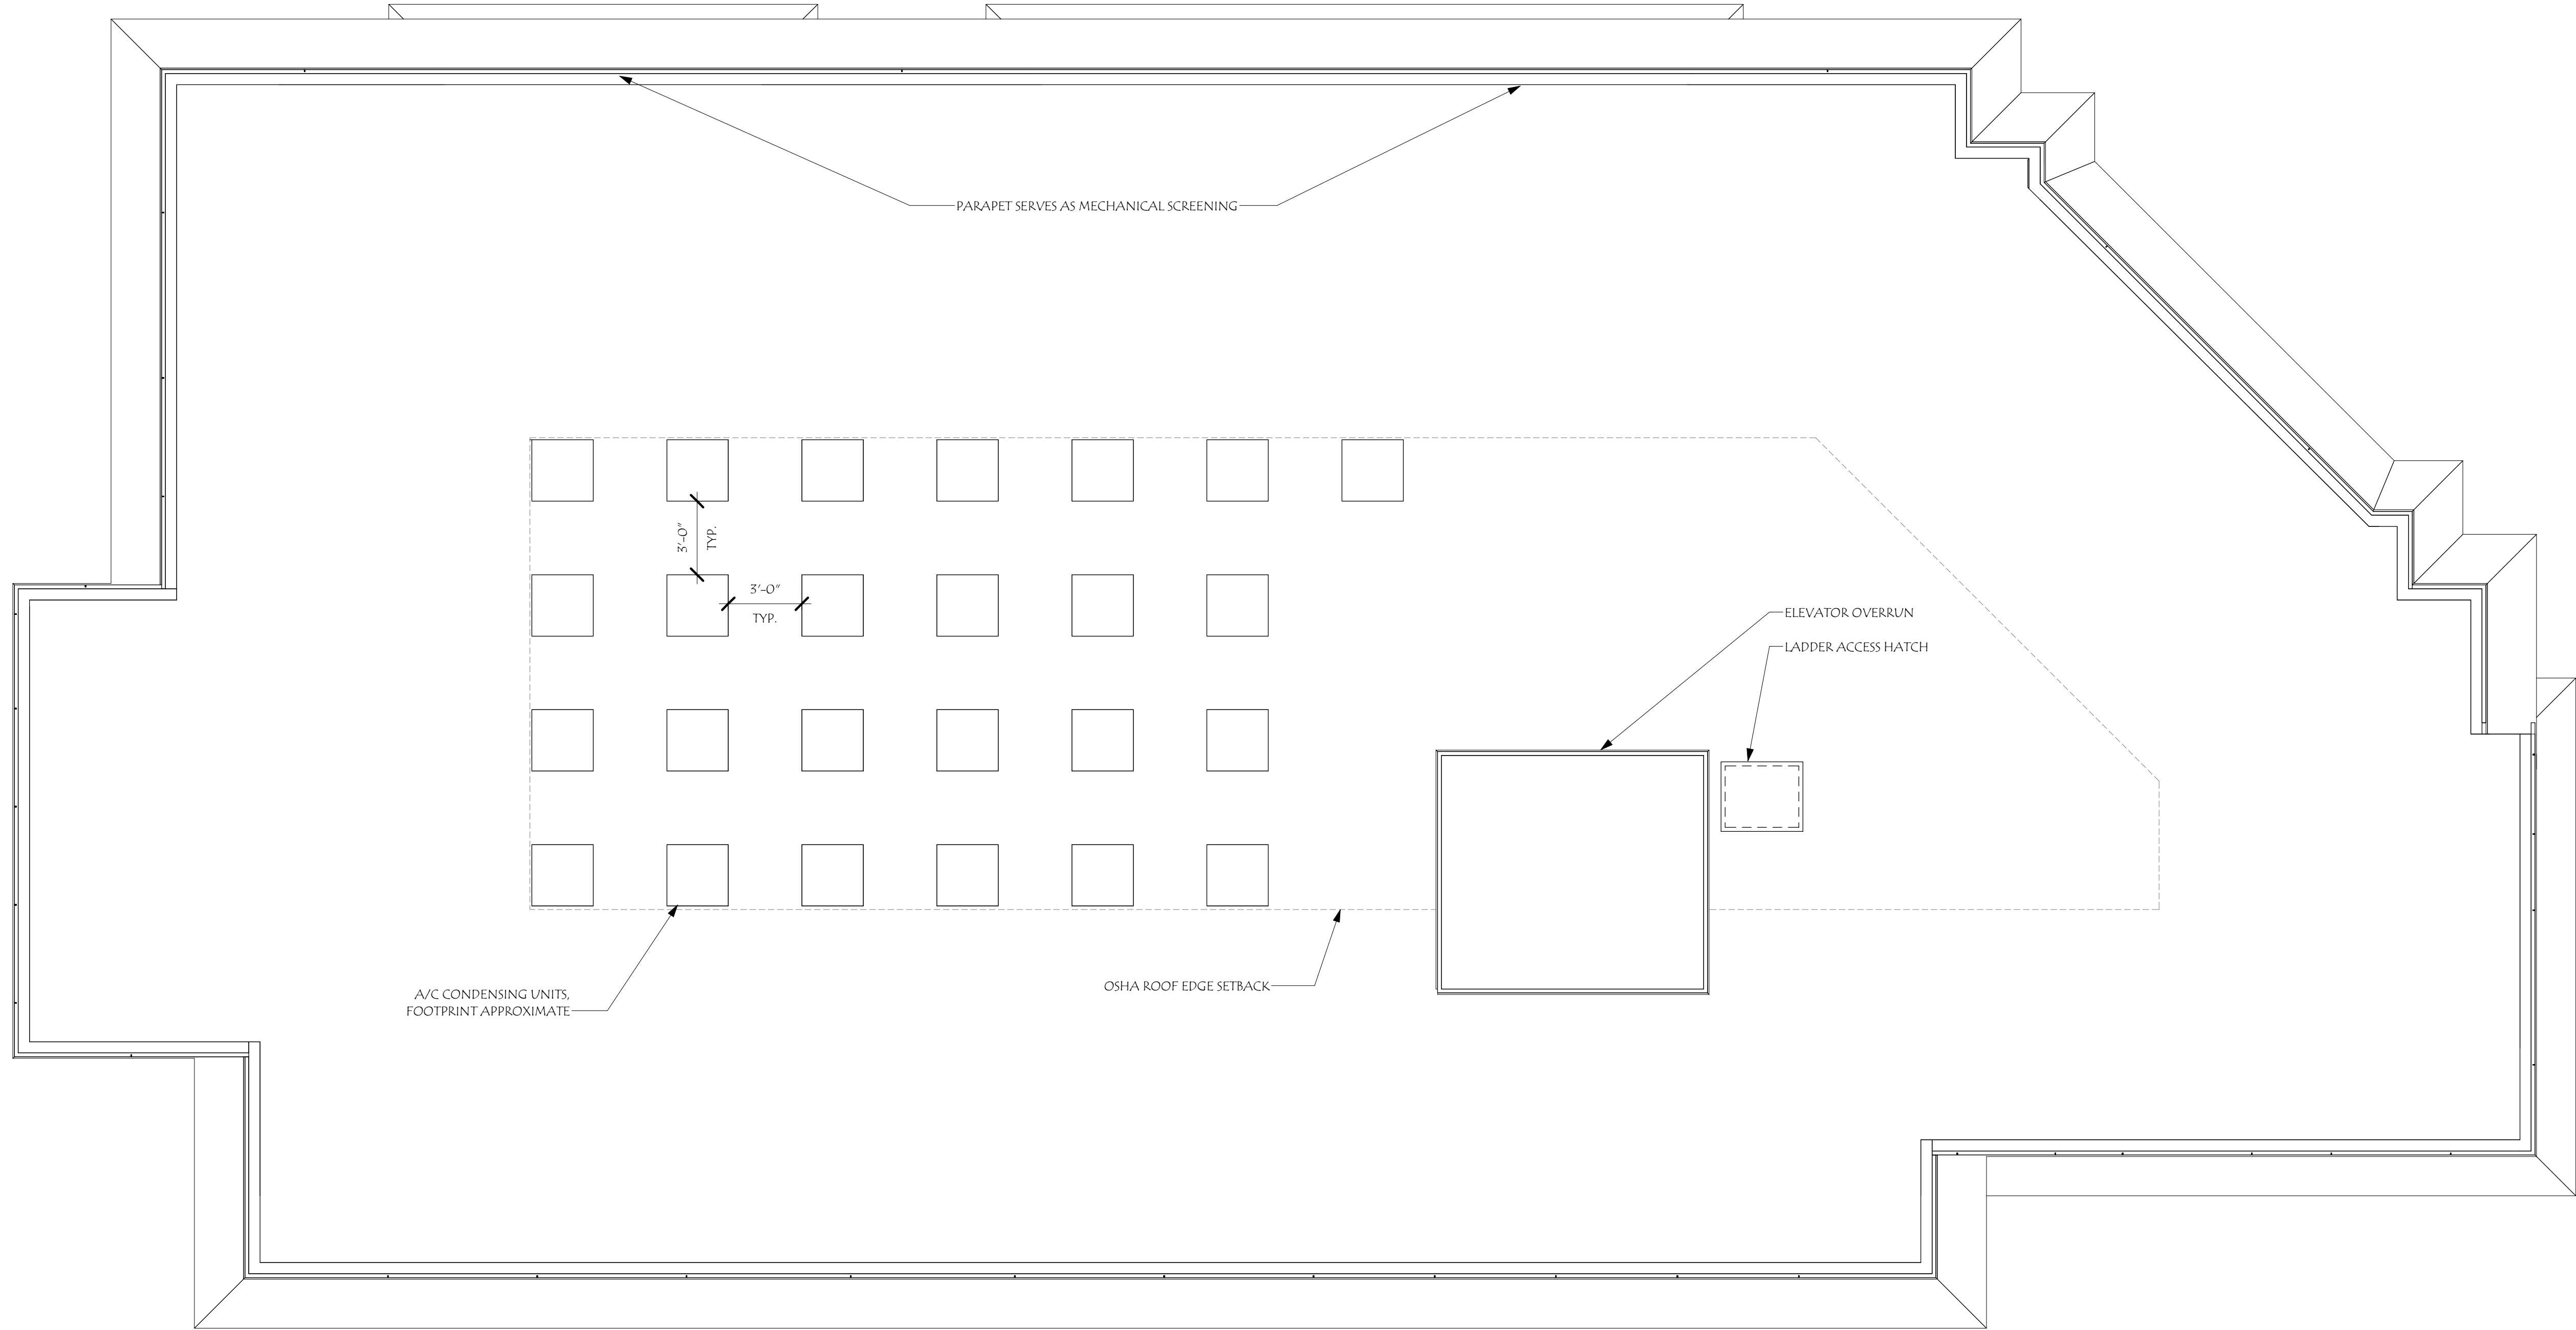



6 PERSPECTIVE



1 CORNER ELEVATION
1/8" = 1'-0"



4 WEST ELEVATION
1/8" = 1'-0"

- MATERIAL NOTES:
- ♦ PAINTED FIBER CEMENT PANEL, TYP. ALL LOCATIONS.
 - ♦ CORNICE/TRIM TO BE FIBER CEMENT OR AZEK WITH METAL FLASHING PAINTED TO MATCH.



5 SOUTH ELEVATION
1/8" = 1'-0"



2 EAST ELEVATION
1/8" = 1'-0"



3 NORTH ELEVATION
1/8" = 1'-0"

Revisions:	Date
#	Description

1/8" = 1'-0"	PPS/LS	ALW
Scale:	Drawn By:	Checked By:
Project No.:	20200004	07/06/20
Date:	6/25/2020 5:47:49 PM	

Title: BUILDING ELEVATIONS	A2.00
----------------------------------	-------

NOTE: CONTEXT BUILDING HEIGHTS AND ELEVATIONS APPROXIMATED.



② LOCKELAND AVE ELEVATION
1/16" = 1'-0"



① MASS AVE ELEVATION
1/16" = 1'-0"


NOT FOR
CONSTRUCTION

ARLINGTON MIXED USE



882-892 MASS AVE
ARLINGTON, MA

Title: STREET ELEVATIONS	Scale:	1/16" = 1'-0"	Revisions:	Date
	Drawn By:	PPS/LS	#	Description
	Checked By:	ALW		
	Project No.:	20200004		
	Date:	07/06/20		



A2.01

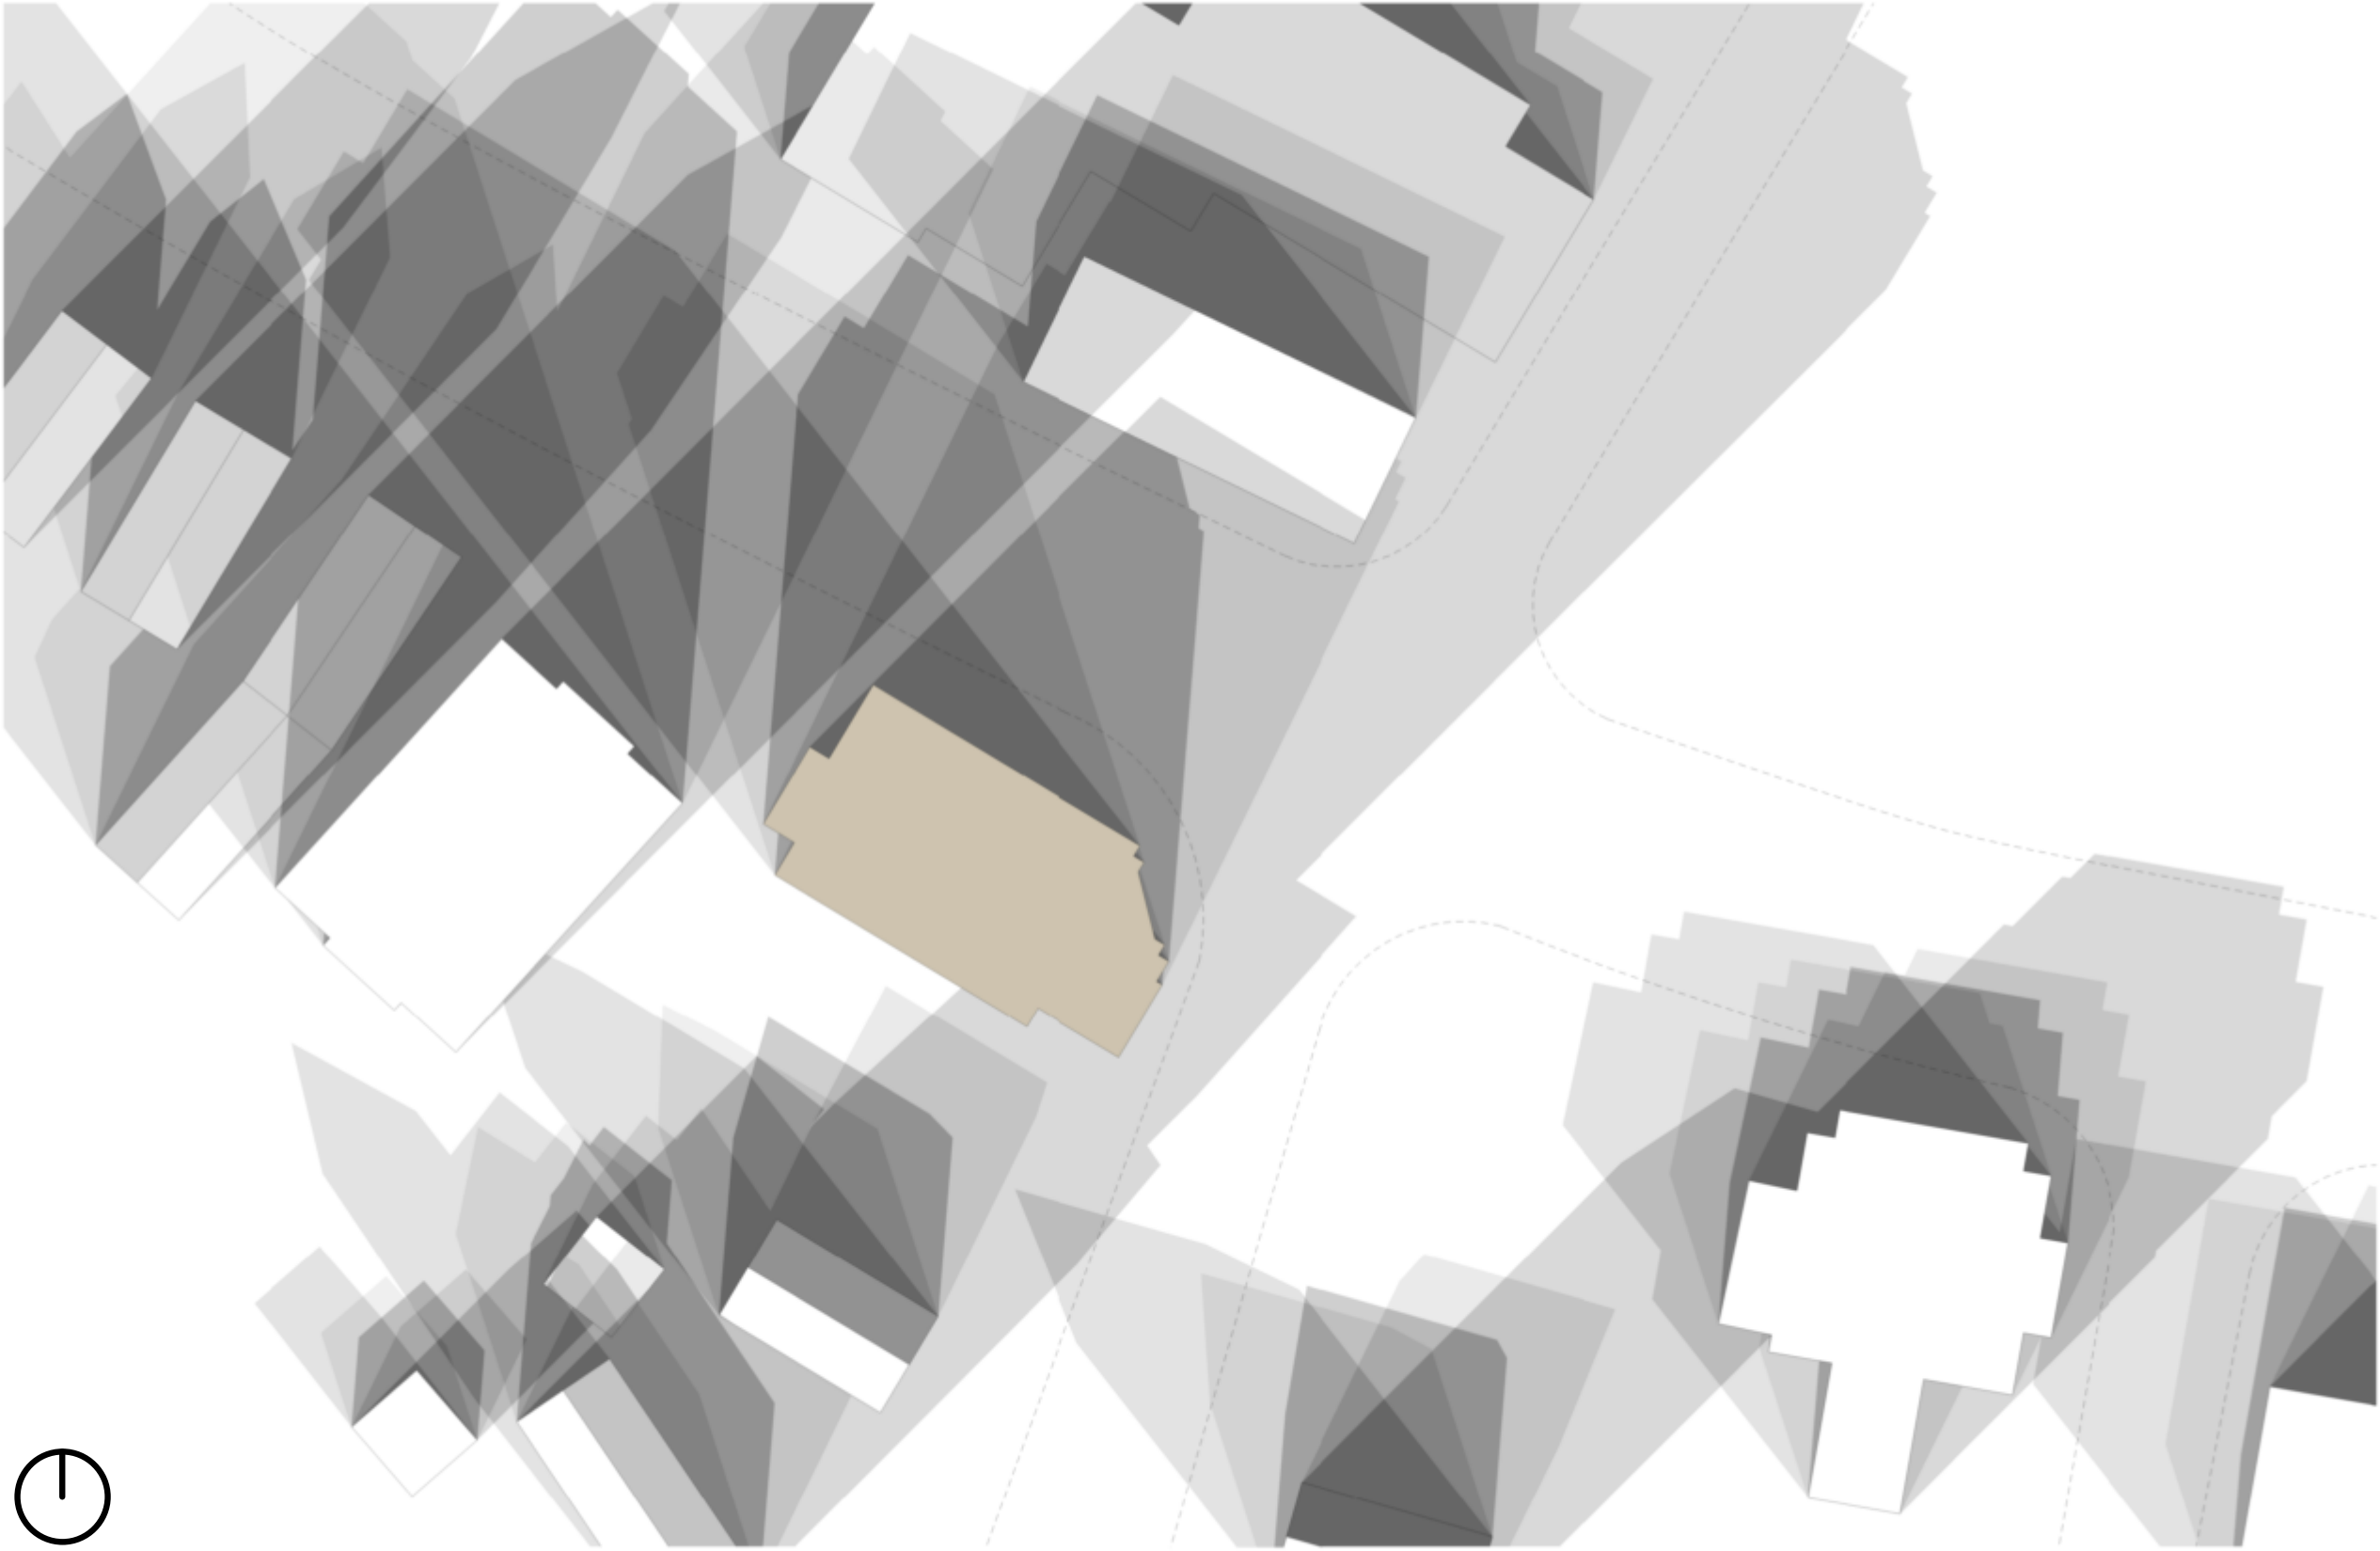

WINTER - 9:00AM TO 3:00PM

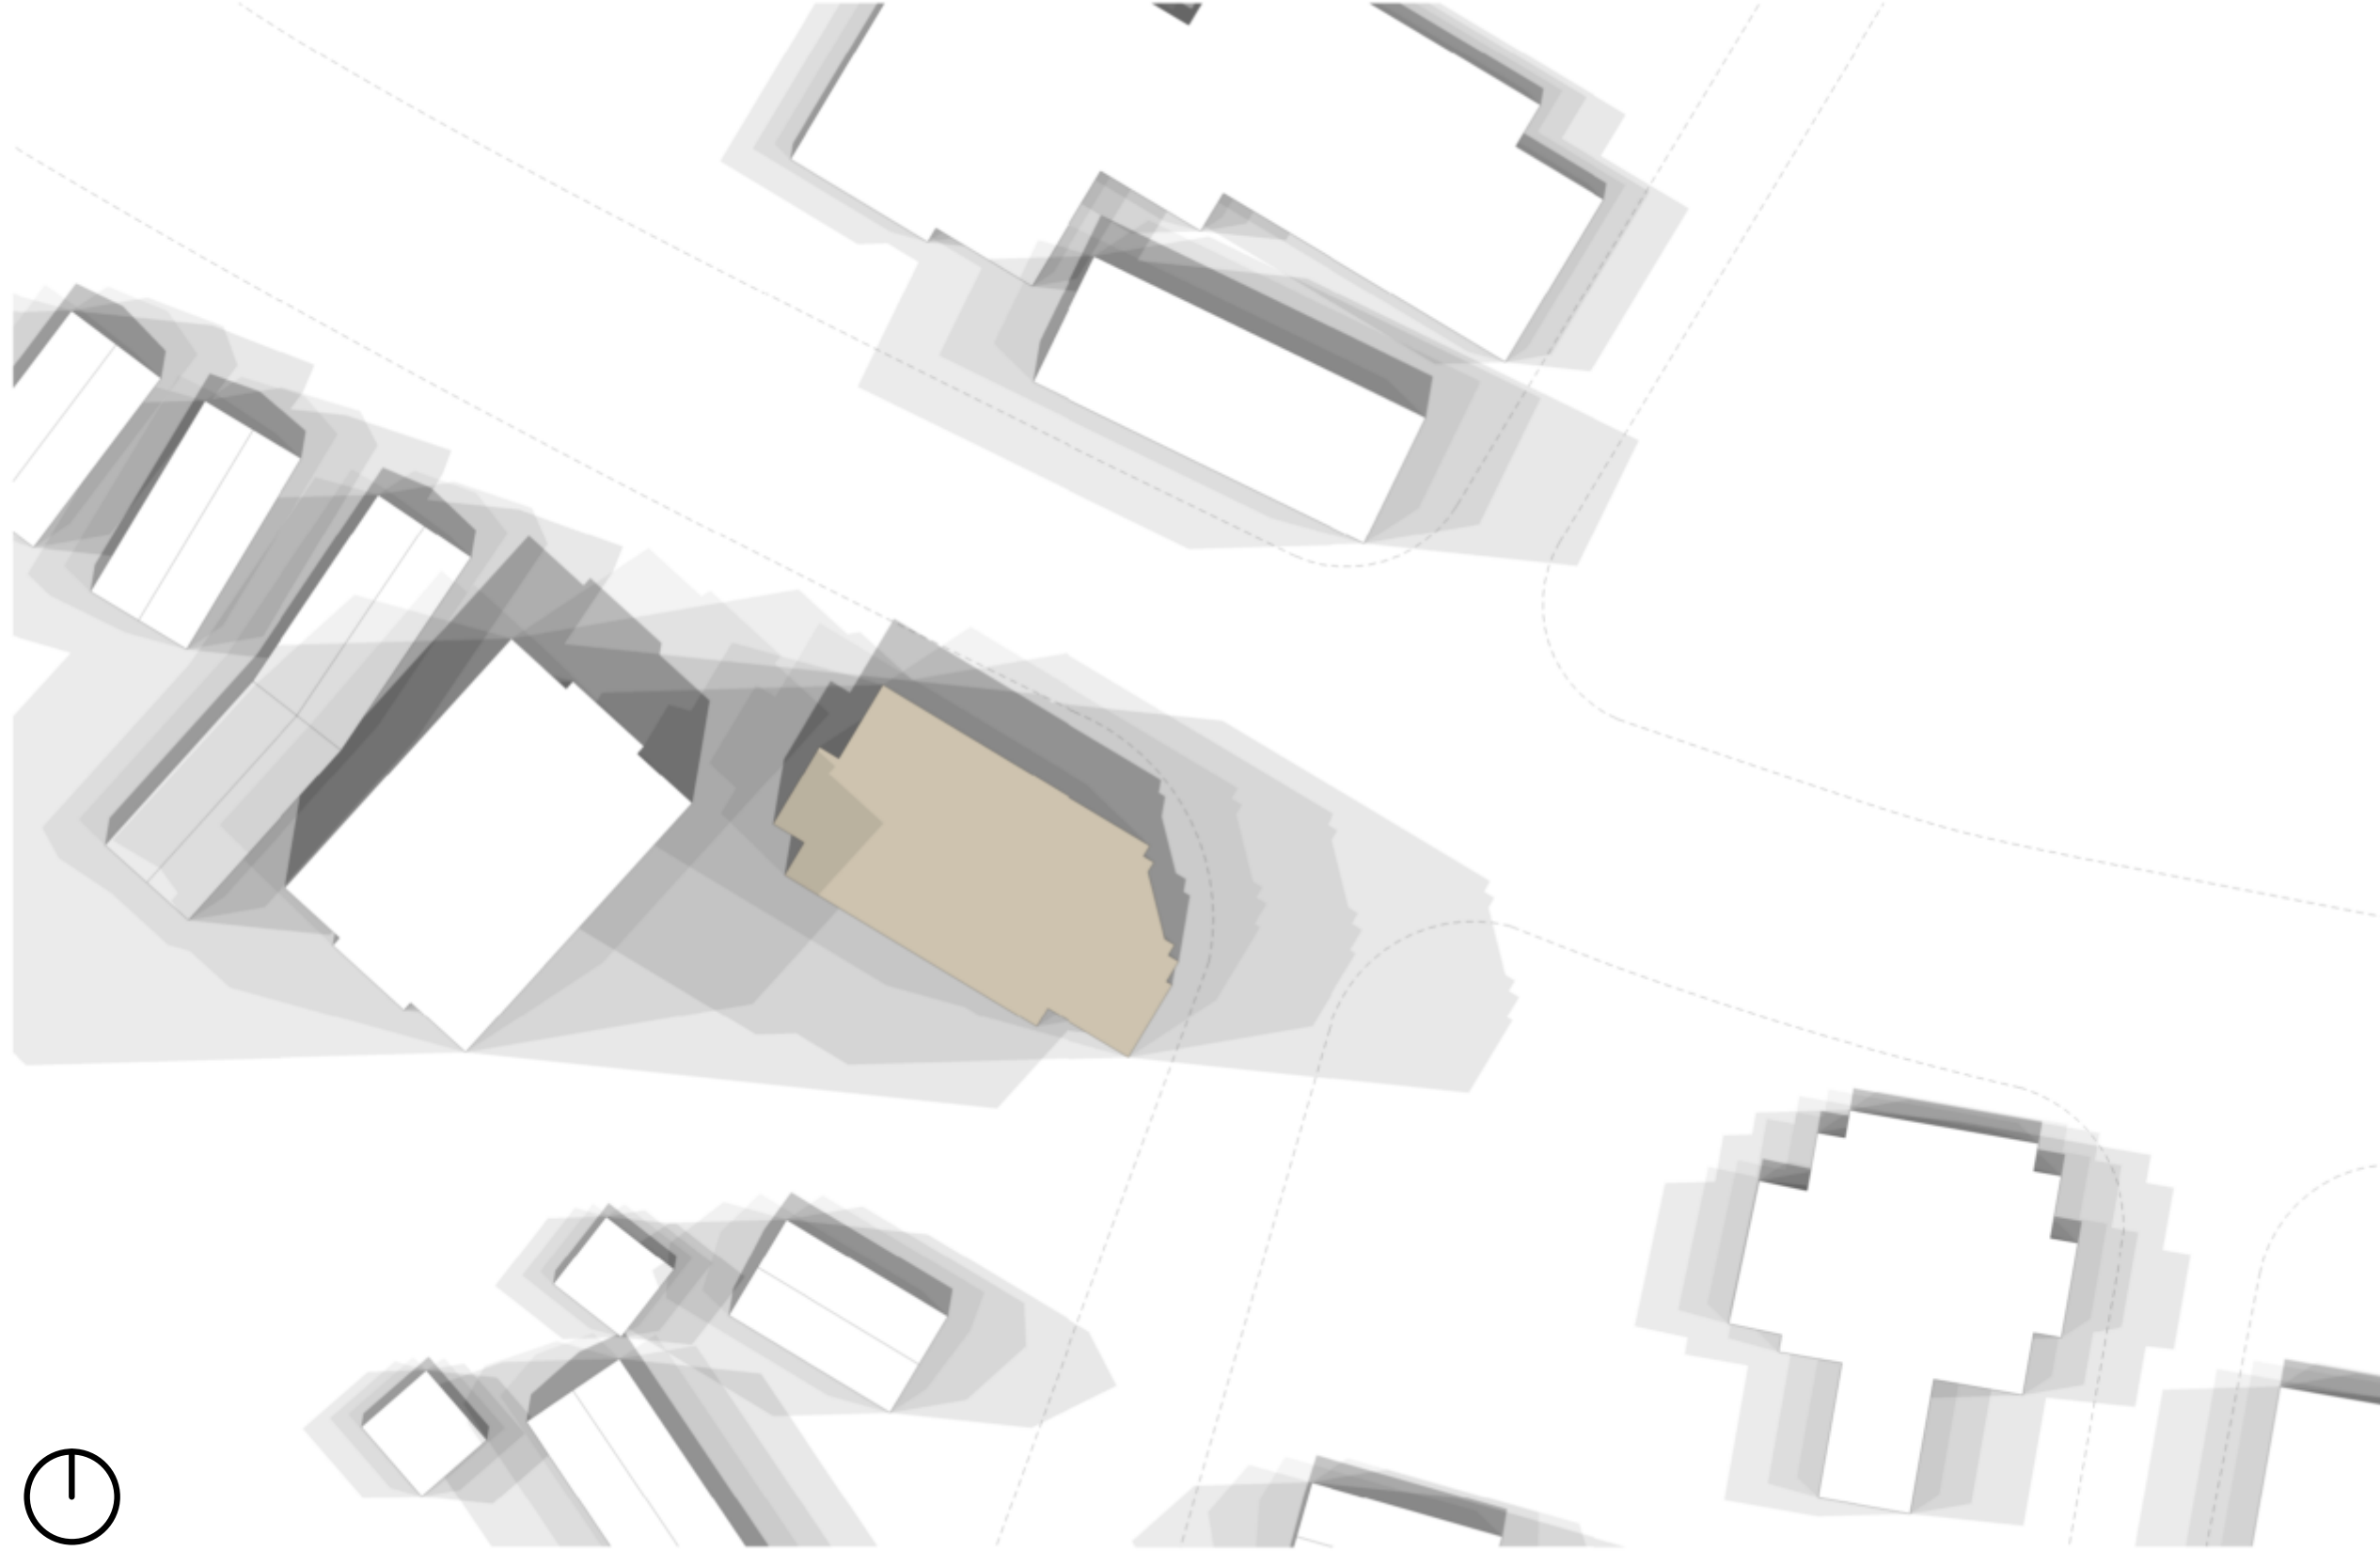

SUMMER - 7:30AM TO 4:30PM

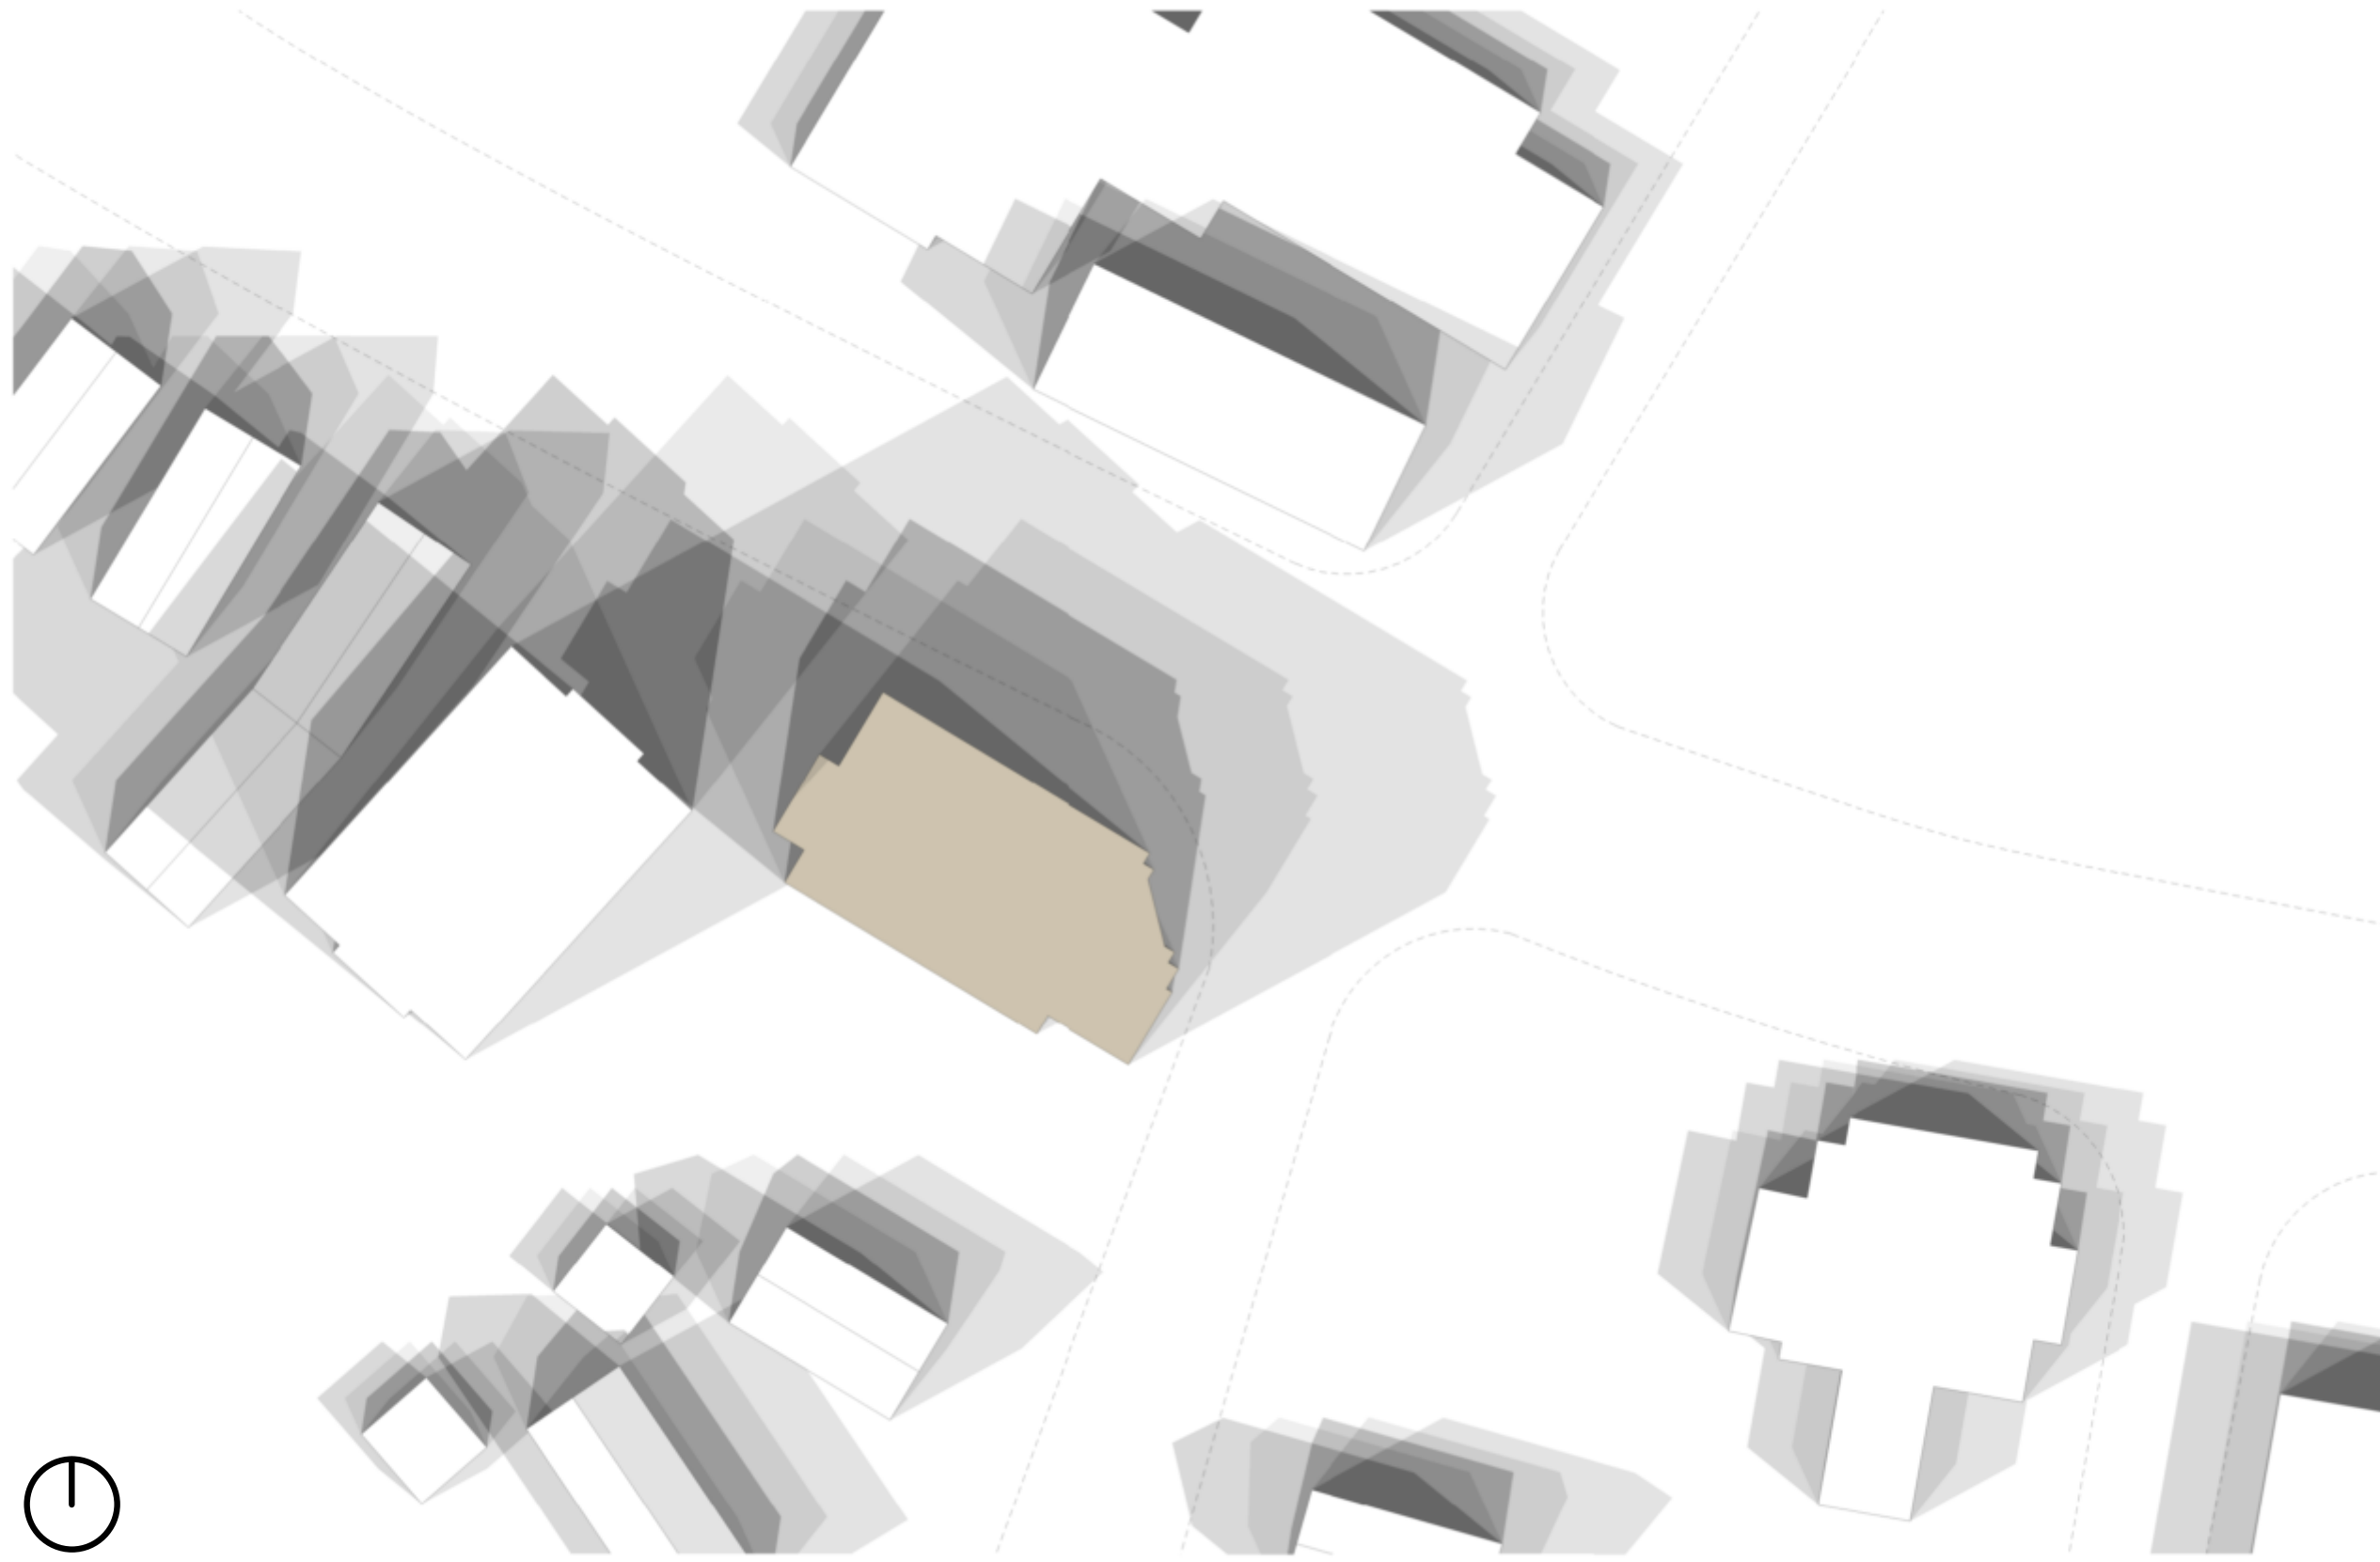

SPRING/FALL - 9:00AM TO 3:00PM

Revisions:		
#	Description	Date

Scale:	PPS/LS
Drawn By:	ALW
Checked By:	20200004
Project No.:	07/06/20
Date:	

Title: SOLAR STUDIES	A9.01



ARLINGTON MIXED USE

882-892 MASS AVE
ARLINGTON, MA

NOT FOR
CONSTRUCTION

Revisions:		
#	Description	Date

Scale:	PPS/LS
Drawn By:	ALW
Checked By:	20200004
Project No.:	07/06/20
Date:	

Title:	CORNER RENDER
	A9.02



ARLINGTON MIXED USE

882-892 MASS AVE
ARLINGTON, MA

NOT FOR
CONSTRUCTION

MARKET
SQUARE


ARCHITECTS
104 Congress St., STE 203
Portsmouth, NH 03801
PH: 603.501.0202

Revisions:		
#	Description	Date

Scale:	PPS/LS
Drawn By:	ALW
Checked By:	
Project No.:	20200004
Date:	07/06/20


Title: LOCKELAND RENDER	
	A9.03

R:\PROJECTS\2729-01\CIVIL\DRAWINGS\CONCEPTS\2020-06-23_BUILDING_COMPARE\C-2729-01_LAYOUT & MATERIALS.DWG

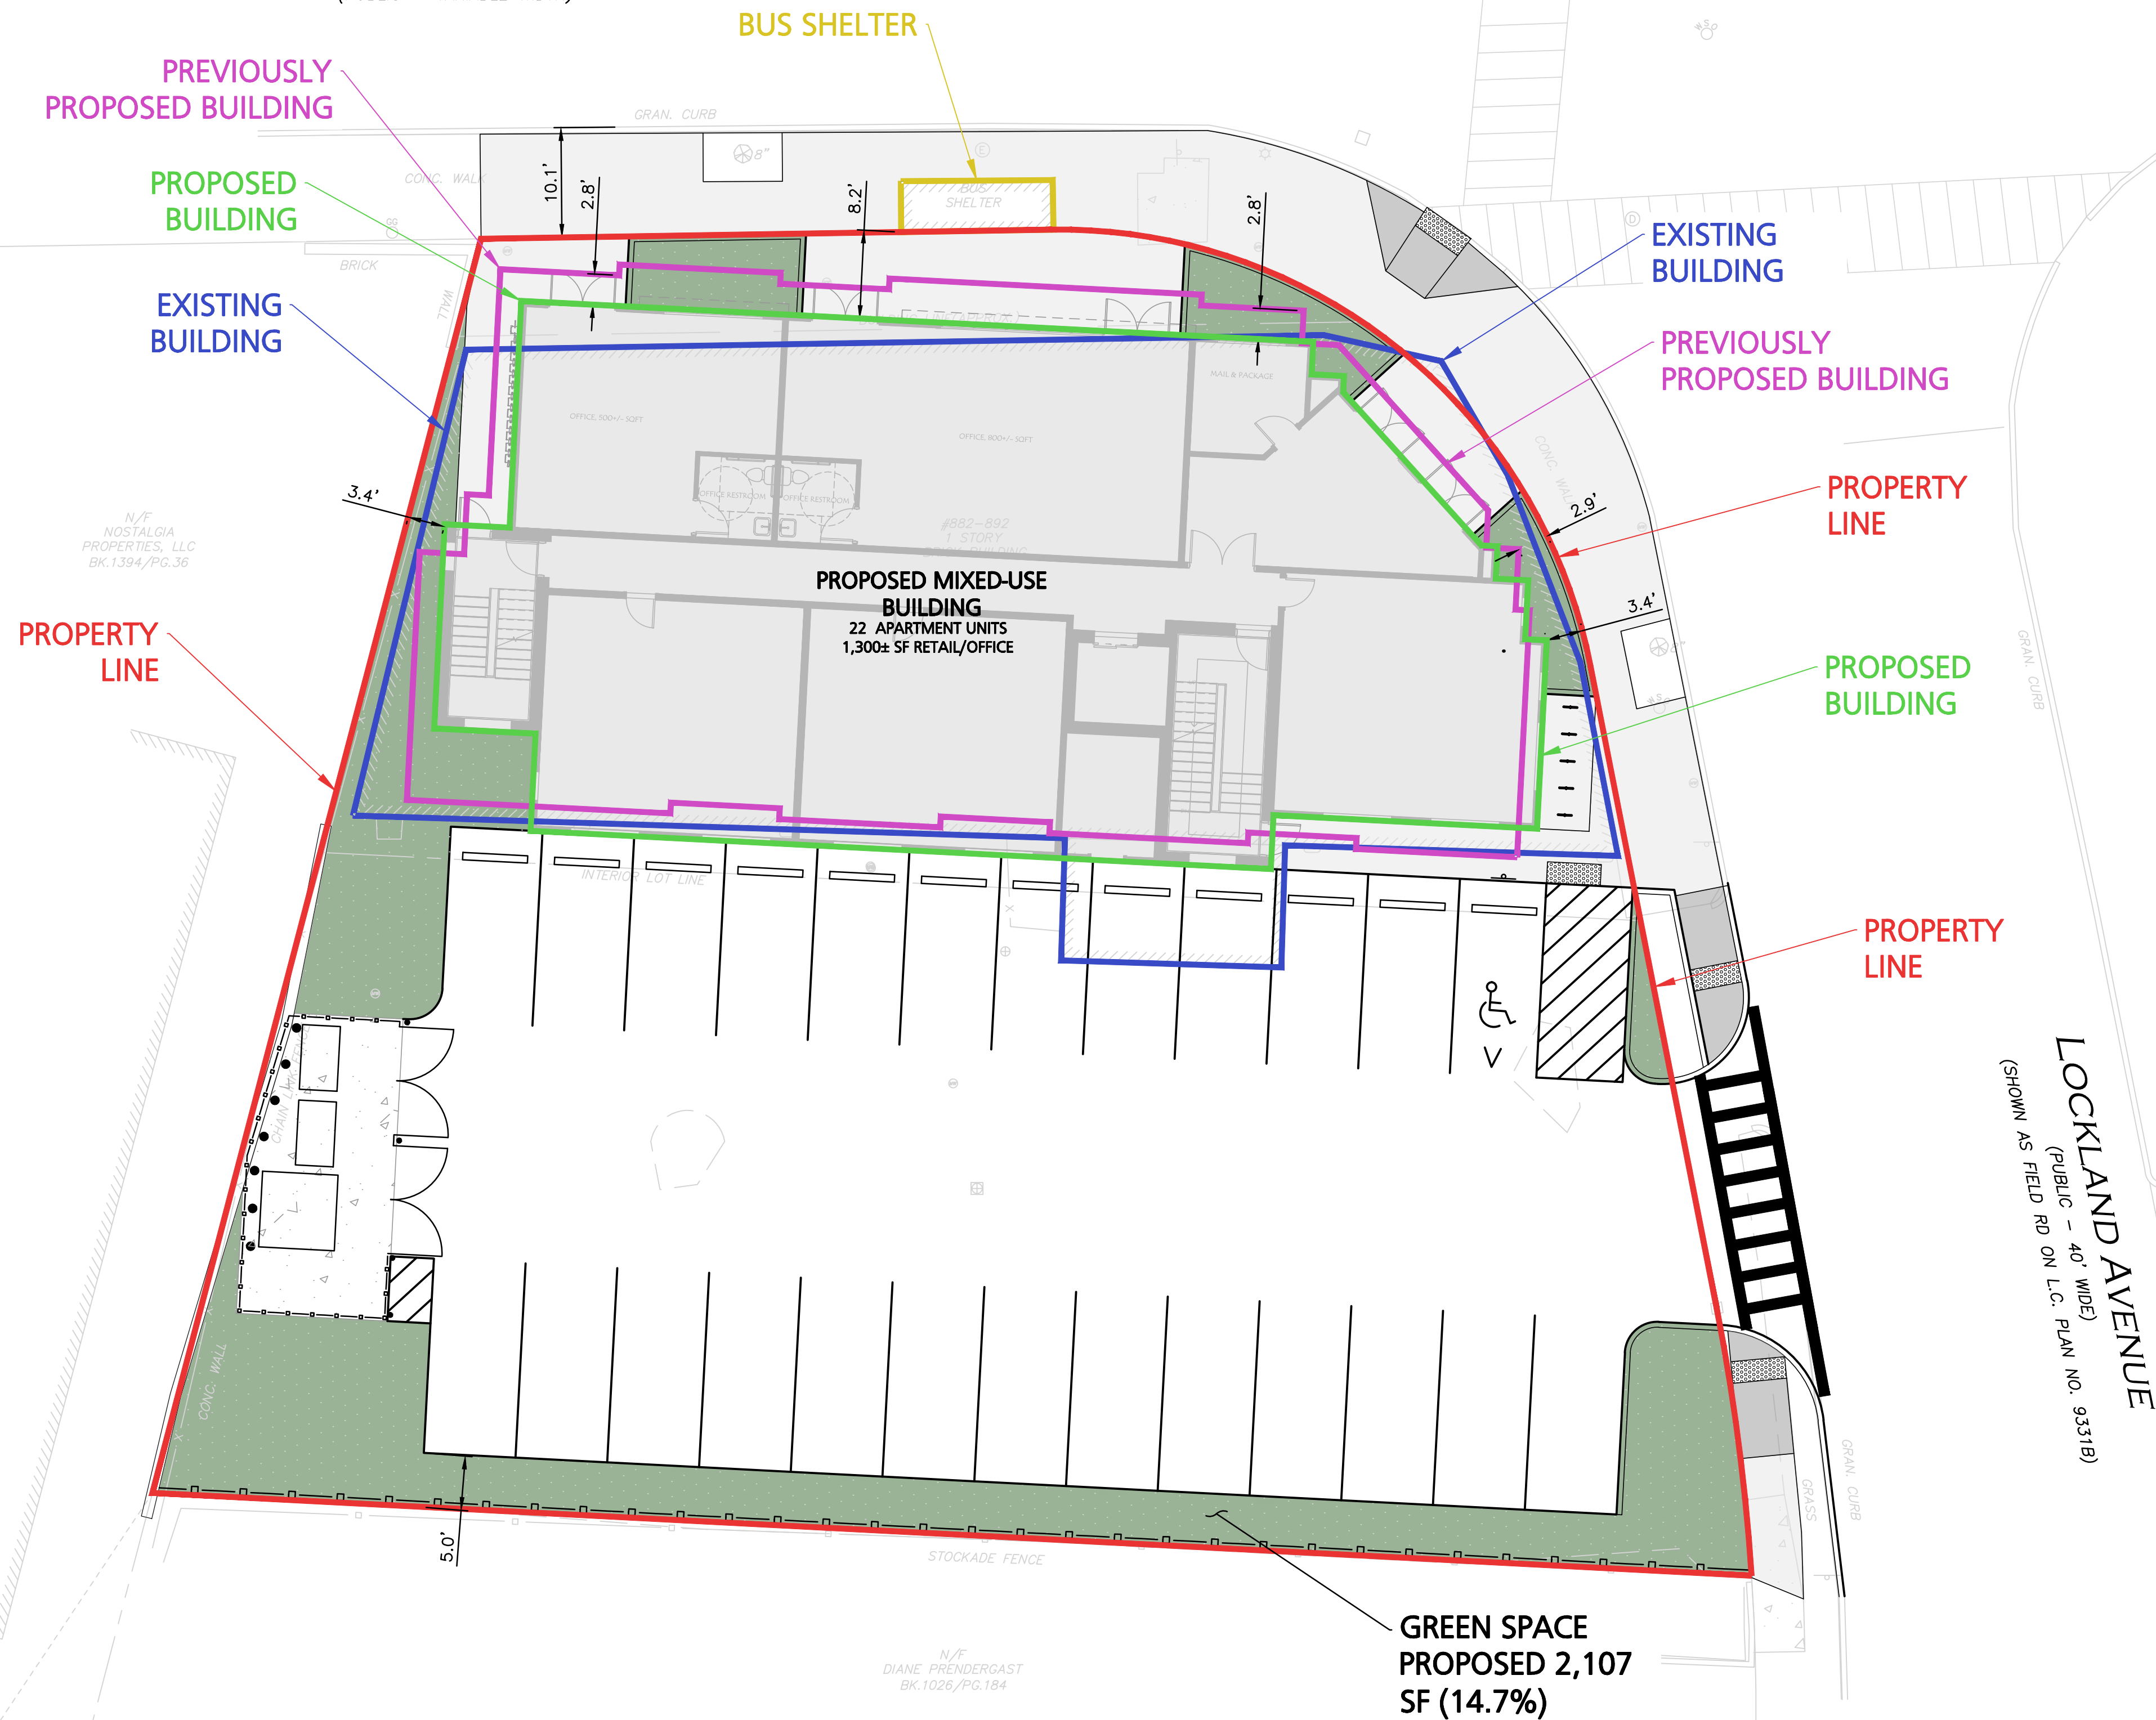

NOTES

1. WRITTEN DIMENSIONS ON THIS PLAN TAKE PRECEDENCE OVER SCALED DIMENSIONS. THE CONTRACTOR SHALL USE CAUTION WHEN SCALING REPRODUCED PLANS. IN THE EVENT OF A CONFLICT BETWEEN THIS PLAN SET AND ANY OTHER DRAWINGS AND/OR SPECIFICATIONS OR CONDITIONS, THE ENGINEER SHALL BE NOTIFIED BY THE CONTRACTOR. ALL SITE ITEMS SHALL BE LAID OUT AND AS BUILT BY A LICENSED LAND SURVEYOR.
2. THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.

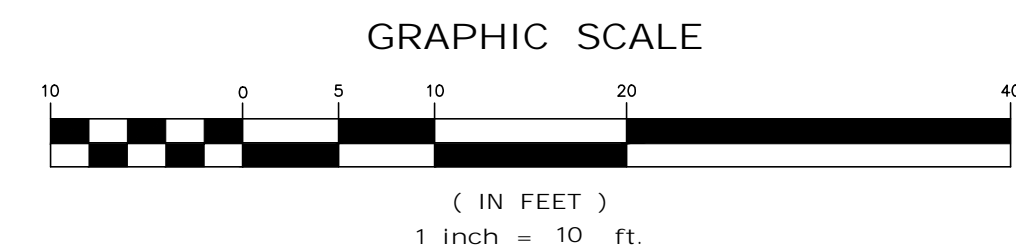

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

REV	DATE	DESCRIPTION
2	06/23/2020	ISSUED FOR ARB
1	04/10/2020	ISSUED FOR ARB

APPLICANT/OWNER:

882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:

892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO.	2729-01	DATE:	04-10-20
SCALE:	1" = 10'	DWG. NAME:	C2729-01
DESIGNED BY:	ARM	CHECKED BY:	BDJ/RC

PREPARED BY:



ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com

100 COMMERCE WAY, SUITE 5
WOBBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORSHIP ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE:	SHEET No.
BUILDING EXHIBIT	EXH-1

Copyright ©2020 Allen & Major Associates, Inc.
All Rights Reserved

R:\PROJECTS\2729-01\CIVIL DRAWINGS\CURRENT\G-2729-01_LAYOUT & MATERIALS.DWG

MASSACHUSETTS AVENUE
(PUBLIC - VARIABLE WIDTH)

ZONING SUMMARY TABLE
B2-NEIGHBORHOOD BUSINESS (MIXED-USE <=20,000SF)

ITEM	REQUIRED/ ALLOWED	EXISTING	PROPOSED
MINIMUM LOT AREA	----	14,380± SF	14,380± SF
MINIMUM LOT AREA PER UNIT	----	N/A	654± SF
MINIMUM FRONTAGE	50 FT	208± FT	208± FT
MINIMUM FRONT YARD SETBACK	----	0 FT	2.7 FT
MINIMUM SIDE YARD SETBACK	----	1.3 FT	3.4 FT
MINIMUM REAR YARD SETBACK	20.3 FT	53.6 FT	63.0 FT
LANDSCAPED OPEN SPACE	10%	5.3%	20.1%
USABLE OPEN SPACE	20%	0.0%	0.4%(2)
MAXIMUM HEIGHT	50 FT	13.5± FT	>50
MAXIMUM HEIGHT STORIES	4(1)	1	4
FLOOR AREA RATIO	1.50	0.35	1.23

ZONING TABLE NOTES:

- SECTION 5.3.17, FOR BUILDING MORE THAN 3 STORIES IN HEIGHT, AN ADDITIONAL 7.5 FT STEP-BACK SHALL BE PROVIDED BEGINNING AT THE THIRD STORY LEVEL OR 30 FT ABOVE GRADE, WHICHEVER IS LESS. THE UPPER STORY STEP-BACK SHALL BE PROVIDED ALONG ALL BUILDING ELEVATIONS WITH STREET FRONTAGE.
- SECTION 5.3.21, SUPPLEMENTAL REQUIREMENTS IN THE BUSINESS AND INDUSTRIAL DISTRICTS, D, FOR MIXED USES AND ANY PERMITTED RESIDENTIAL USE NOT SPECIFICALLY IDENTIFIED IN THE TABLES IN SECTION 5.5.2, THE MINIMUM OPEN SPACE REQUIREMENTS (COMPUTED FROM THE RESIDENTIAL FLOOR AREA ONLY) SHALL BE 10% LANDSCAPED AND 20% USABLE IN THE B1, B2, B2A, B3, AND B4 DISTRICTS, AND 15 PERCENT USABLE IN THE B5 DISTRICT. A WAIVER MAY BE REQUIRED FROM THE USABLE OPEN SPACE REQUIREMENT.

PARKING SUMMARY TABLE

USE	CALCULATION	MIN. REQUIRED	TOTAL PROPOSED
APARTMENT BUILDING	1.15 SPACES PER 1 BED UNIT	21	21
	18 X 1.15 = 21 REQUIRED		
	1 SPACE PER EFFICIENCY UNIT 4 X 1 = 4 REQUIRED	4	4
OFFICE BUSINESS OR PROFESSIONAL	1 PER 500 SF	N/A	N/A
	1,300 SF (UNDER 3,000 SF PARKING N/A)		
		25	25

ADA SPACES REQUIRED:

(15-25) TOTAL PARKING SPACES PROVIDED, 1 SHALL BE THE MINIMUM ADA PARKING PROVIDED, 1 SPACES BEING VAN ACCESSIBLE.

PROVIDED 1 SPACES, 1 BEING VAN ACCESSIBLE.

PARKING TABLE NOTES:

- SECTION 6.1.10, C, FOR A MIXED-USE DEVELOPMENT THE FIRST 3,000 SF OF NON-RESIDENTIAL SPACE IS EXEMPT FROM THE PARKING REQUIREMENTS OF THIS SECTION 6.1.
- SECTION 6.1.11, STANDARD PARKING STALLS SHALL BE 8.5'X18', AND COMPACT SPACES SHALL BE 8'X16'(UP TO 20% ALLOWED WITH S.P.). DRIVE AISLE WIDTH SHALL BE 24' FOR TWO-WAY TRAFFIC.

LEGEND

PROP. PROPERTY LINE	---
SIGN	+
BOLLARD	•
BUILDING	[Solid Yellow]
BUILDING ARCHITECTURE	[Outline]
BUILDING INTERIOR WALLS	[Dashed]
CURB	[Solid Line]
PARKING STRIPING	[Zebra]
ROADWAY STRIPING	[Zebra]
SIDEWALK	[Solid Line]
ADA ACCESSIBLE RAMP	[Slope Arrow]
ADA DET. WARNING SURFACE	[Hatched]
SNOW STORAGE	[Dashed]
SAW-CUT LINE	[Dashed]
PARKING COUNT	(10)
VINYL FENCE	[Dashed]

NOTES

- WRITTEN DIMENSIONS ON THIS PLAN TAKE PRECEDENCE OVER SCALED DIMENSIONS. THE CONTRACTOR SHALL USE CAUTION WHEN SCALING REPRODUCED PLANS. IN THE EVENT OF A CONFLICT BETWEEN THIS PLAN SET AND ANY OTHER DRAWINGS AND/OR SPECIFICATIONS OR CONDITIONS, THE ENGINEER SHALL BE NOTIFIED BY THE CONTRACTOR. ALL SITE ITEMS SHALL BE LAID OUT AND AS BUILT BY A LICENSED LAND SURVEYOR.
- THE INFORMATION SHOWN ON THIS PLAN IS THE SOLE PROPERTY OF ALLEN & MAJOR ASSOCIATES, INC. ITS INTENDED USE IS TO PROVIDE INFORMATION. ANY ALTERATION, MISUSE, OR RECALCULATION OF INFORMATION OR DATA WITHOUT THE EXPRESSED, WRITTEN CONSENT OF ALLEN & MAJOR ASSOCIATES, INC. IS STRICTLY PROHIBITED.

PROFESSIONAL ENGINEER FOR
ALLEN & MAJOR ASSOCIATES, INC.

2 06/23/2020 ISSUED FOR ARB
1 04/10/2020 ISSUED FOR ARB
REV DATE DESCRIPTION
APPLICANT/OWNER:
882-892 MASSACHUSETTS AVE, LLC
452 MASSACHUSETTS AVE, STE 1
ARLINGTON, MA 02474

PROJECT:
892 MASSACHUSETTS AVE
ARLINGTON, MA 02476

PROJECT NO. 2729-01 DATE: 04-10-20
SCALE: 1" = 10' DWG. NAME: C2729-01
DESIGNED BY: ARM CHECKED BY: BDJ/RC

PREPARED BY:


ALLEN & MAJOR ASSOCIATES, INC.
civil engineering • land surveying
environmental consulting • landscape architecture
www.allenmajor.com
100 COMMERCE WAY, SUITE 5
WOBURN MA 01801
TEL: (781) 935-6889
FAX: (781) 935-2896

WOBURN, MA • LAKEVILLE, MA • MANCHESTER, NH

THIS DRAWING HAS BEEN PREPARED IN DIGITAL FORMAT. CLIENT/CUSTOMER'S REPRESENTATIVE OR CONSULTANTS MAY BE PROVIDED COPIES OF DRAWINGS AND SPECIFICATIONS FOR HIS/HER INFORMATION AND/OR SPECIFIC USE ON THIS PROJECT. DUE TO THE POTENTIAL THAT THE PROVIDED INFORMATION MAY BE MODIFIED UNINTENTIONALLY OR OTHERWISE, ALLEN & MAJOR ASSOCIATES, INC. MAY REMOVE ALL INDICATION OF THE DOCUMENT'S AUTHORITY ON THE DIGITAL MEDIA. PRINTED REPRESENTATIONS OR PORTABLE DOCUMENT FORMAT OF THE DRAWINGS AND SPECIFICATIONS ISSUED SHALL BE THE ONLY RECORD COPIES OF ALLEN & MAJOR ASSOCIATES, INC.'S WORK PRODUCT.

DRAWING TITLE: LAYOUT & MATERIALS PLAN SHEET No. C-102

Copyright © 2020 Allen & Major Associates, Inc.
All Rights Reserved

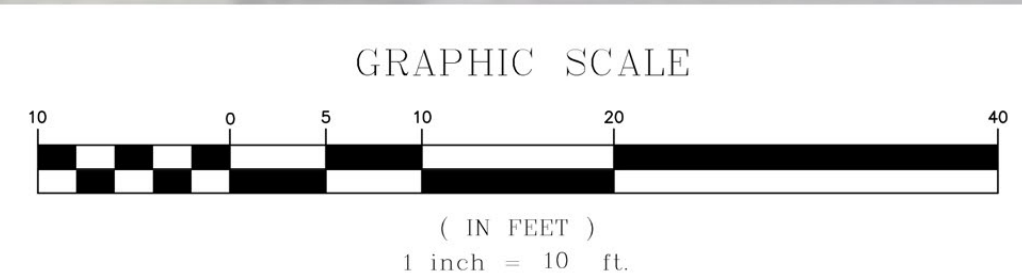

Deed



2018 01783071
Bk: 1523 Pg: 101 Cert#: 267194
Doc: DEED 03/06/2018 12:33 PM

QUITCLAIM DEED

FFCP LLC, a, a limited liability company duly formed under the laws of the Commonwealth of Massachusetts and having a principal place of business at 455 Massachusetts Avenue, Suite 1, Arlington, Middlesex County, Commonwealth of Massachusetts

for consideration paid of ~~one hundred~~ One Hundred and 00/100 (\$100.00) Dollars, grants to 882-892 Massachusetts Avenue, LLC, a limited liability company duly formed under the laws of the Commonwealth of Massachusetts and having a principal place of business at 455 Massachusetts Avenue, Suite 1, Arlington, Middlesex County, Commonwealth of Massachusetts

with quitclaim covenants

The premises known as 882-892 Massachusetts Avenue/Field Road, Arlington, Middlesex County, Massachusetts, described as follows:

Parcel I

That certain parcel of land situated in Arlington in the County of Middlesex and said Commonwealth of Massachusetts, bounded and described as follows:

NORTHEASTERLY:	by Massachusetts Avenue, fifty-two and 78/100 (52.78) feet;
EASTERLY:	by Field Road, now called Lockeland Avenue, by a curving line as shown on plan hereinafter mentioned, sixty-nine and 65/100 (69.65) feet;
SOUTHEASTERLY:	by said Field Road, twenty-five and 34/100 (25.34) feet;

RETURN TO:
MacLean Holloway Doherty & Sheehan, P.C.
8 Essex Center Drive
Peabody, MA 01960

263 193 1523-100

Property Address: 882-892 Massachusetts Ave./Field Road, Arlington, MA

SOUTHWESTERLY: by lot 67A on said plan, one hundred twenty-two and 89/100 (122.89) feet; and

NORTHWESTERLY: by land now or formerly of Timothy F. Hurley, fifty-nine and 97/100 (59.97) feet.

Said parcel is shown as lot 68A on said plan (Plan No. 9331E).

All of said boundaries are determined by the Court to be located as shown on a subdivision plan, as approved by the Court, filed with the Land Registration Office in Registration Book 149, Page 209, with Certificate 22249.

The above described land is subject to a Taking by the Town of Arlington for establishment of building line on both sides of Massachusetts Avenue, see the plan filed with the Land Registration Office as Plan No. 774, Document 52309; to a Taking for laying and maintaining main drains and common sewers in Field Road, see the plan filed with the Land Registration Office as Plan Book 355, Plan 42, Document 61387; to a Taking for Easement in Lockeland Avenue for laying and maintaining main drains, filed in the Land Registration Office as Document 81646; and to an Order of Taking for paying out Lockeland Avenue and Estimated Betterment Assessment, filed with the Land Registration Office as Document 112896.

Parcel II

That certain parcel of land in said Arlington, County of Middlesex, Commonwealth of Massachusetts, bounded and described as follows:

SOUTHEASTERLY: by Field Road, sixty and 23/100 (60.23) feet;

SOUTHWESTERLY: by lot 66 as shown on plan hereinafter mentioned, one hundred forty-eight and 15/100 (148.15) feet;

NORTHWESTERLY: by land now or formerly of Timothy F. Hurley; and

NORTHEASTERLY: by lot 68A on said plan, one hundred twenty-two and 89/100 (122.89) feet.

All of said boundaries are determined by the Court to be located as shown on a subdivision plan, as approved by the Court, filed with said Land Registration Office in Registration Book 149, Page 209, with Certificate 22249. Said parcel is shown as lot 67A on said plan (Plan No. 9331E).

The above described land is subject to a Taking by the Town of Arlington for laying and maintaining main drains and common sewers in Field Road, see plan filed with said Land Registration Office in Plan Book 355, Plan 42, Document 61387; to an Order to Taking for the

laying out Lockeland Avenue and Estimated Betterment Assessment, filed with the Land Registration Office as Document 112896.

The Grantor is not classified as a corporation for federal income tax purposes for the current taxable year.

Meaning and intending to convey the same premises described in deed dated October 4, 2017, from Fragio Realty Trust to FFCP, LLC, filed herewith.

[The Following Page Is the Signature Page]

Executed this 21st day of December, 2017 as a sealed instrument.

FFCP, LLC

By: FFP REALTY CORP., Its Manager

By:


Frank Pasciuto, Its President and Treasurer


LLC
12/31/17

COMMONWEALTH OF MASSACHUSETTS

Essex, ss.

On this 21st day of December, 2017, before me, the undersigned notary public, personally appeared Frank Pasciuto, as President and Treasurer of FFP Realty Corp., Manager of FFCP, LLC, proved to me through satisfactory evidence of identification, which was personal knowledge, to be the person whose name is signed on the preceding or attached document in my presence, and acknowledged to me that he signed it voluntarily in his capacity as President and Treasurer of FFP Realty Corp. for its stated purpose.


Notary Public: *Daniel W. Doherty*
My Commission Expires: 05/15/20



DOCUMENT 01783071

Southern Middlesex Land Court

REGISTRY DISTRICT


RECEIVED FOR REGISTRATION

On: Mar 06, 2018 at 12:33P

Document Fee: 125.00
Receipt Total: \$325.00

NEW: CERT 267194 BK 01523 PG 101

OLD: CERT 267193 BK 1523 PG 100



9331^E

Subdivision of Lots 67 & 68 shown on plan 9331^B Sh.1


Filed with Cert. of Title No. 19,223 South Registry District of Middlesex County.

LAND IN ARLINGTON


Scale 40 feet to an inch

JUNE 22, 1926

C.R. Gannett, C.E.



MASSACHUSETTS AVENUE

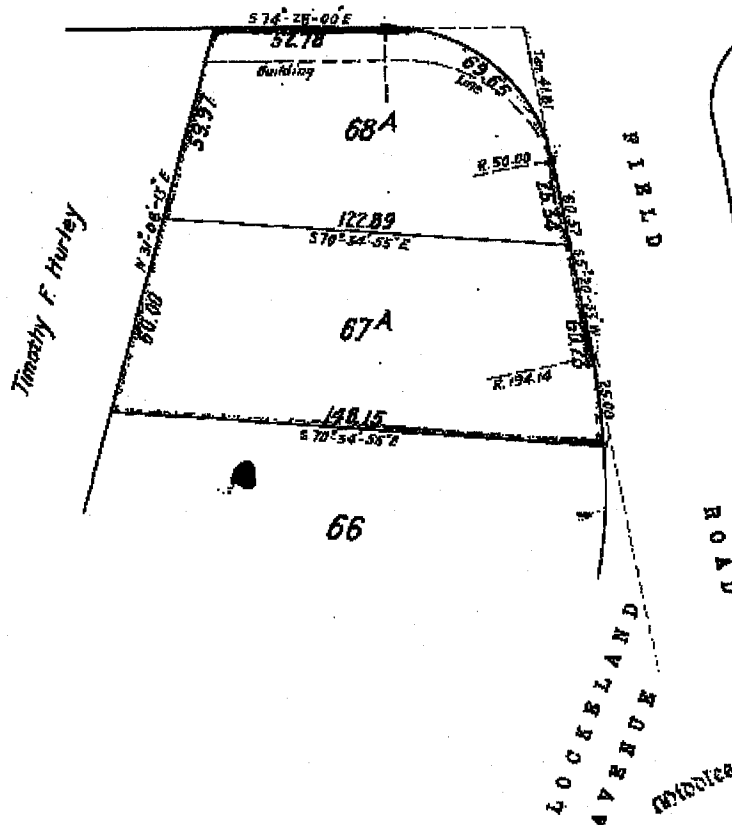

Middlesex South Registry District
AUG 4 1926
RECEIVED FOR REGISTRATION
3 O'CLOCK 10 M
Jd. 100.

Separate certificates of title may be issued
for Lots 67A and 68A as shown hereon
By the Court


Charles Southworth
Recorder.
JULY 23, 1926

Copy of part of plan
filed in
LAND REGISTRATION OFFICE
JULY 22, 1926
Scale of this plan 40 feet to an inch
C. B. Humphrey, Surveyor for Court

JUNE 22, 1926

C.H. Gannett, C.E.

MASSACHUSETTS AVENUE

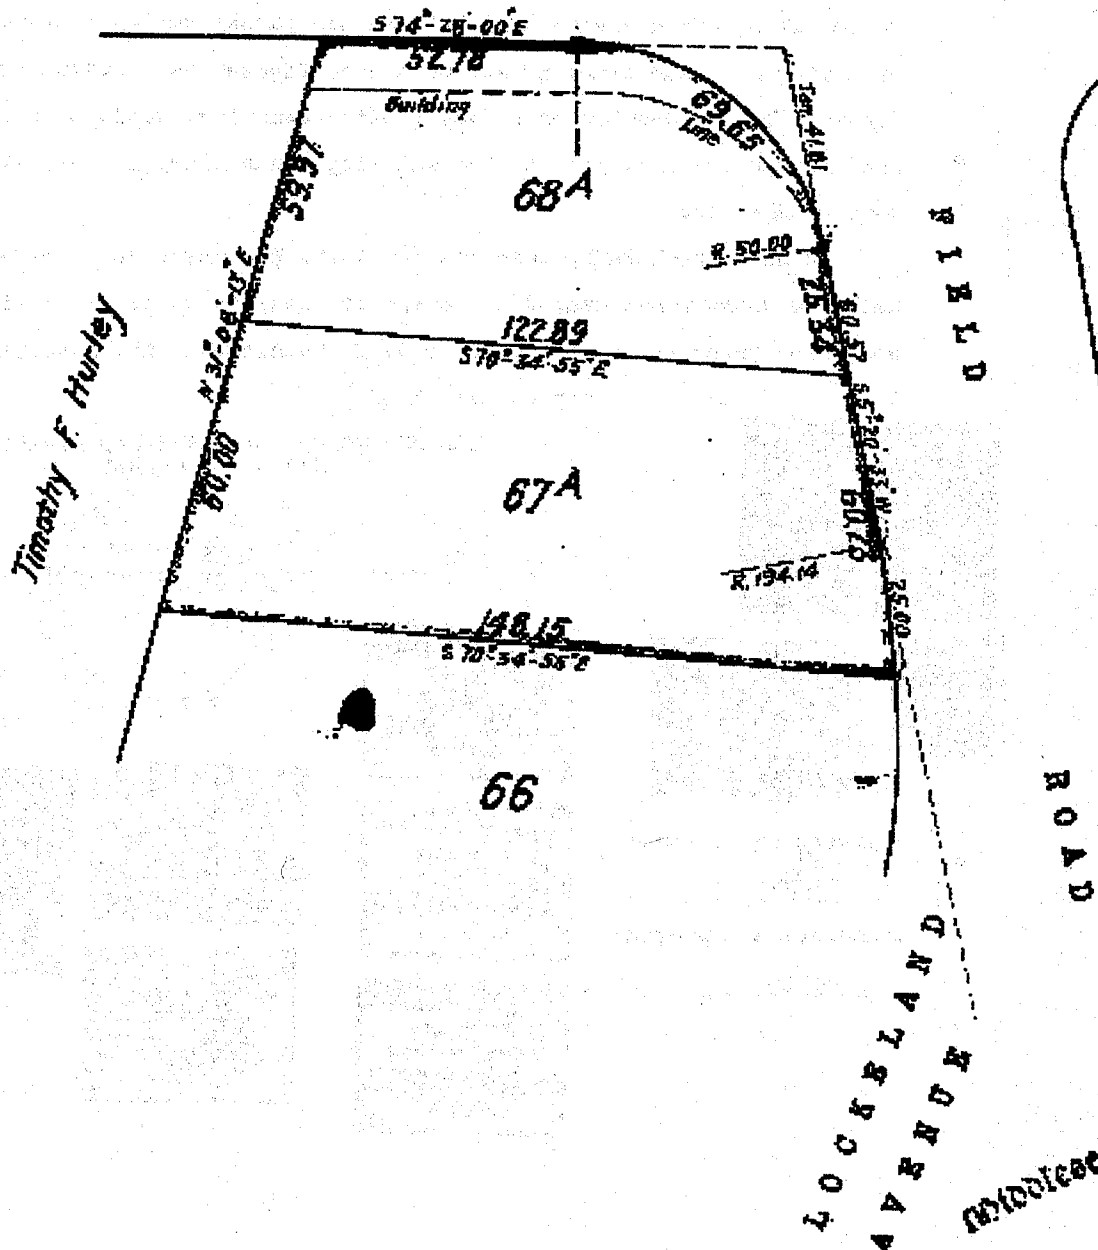

Worcester South 1

AUG 4
RECEIVED FOR R